

DVD+Recordable
Single Layer, 4,7 Gbytes

Basic Format Specifications

System Description
part 1, volume 1

version 1.31

September 2007

COPYRIGHT

The SYSTEM DESCRIPTION DVD+R 4,7 Gbytes is published by Royal Philips Electronics, (Eindhoven, The Netherlands) and has been prepared in close co-operation with Hewlett-Packard Company (Palo Alto CA, USA), Mitsubishi Chemical Corporation (Tokyo, Japan), Ricoh Company, LTD. (Tokyo, Japan), Sony Corporation (Tokyo, Japan), and Yamaha Corporation (Hamamatsu, Japan). All rights are reserved. Reproduction in whole or in part is prohibited without express and prior written permission of Royal Philips Electronics

DISCLAIMER

The information contained herein is believed to be accurate as of the date of publication, however, neither Royal Philips Electronics, nor Hewlett-Packard Company, nor Mitsubishi Chemical Corporation, nor Ricoh Company, LTD., nor Sony Corporation, nor Yamaha Corporation will be liable for any damages, including indirect or consequential, from use of the SYSTEM DESCRIPTION DVD+R 4,7 Gbytes or reliance on the accuracy of this document.

LICENSING

Application of the SYSTEM DESCRIPTION DVD+R 4,7 Gbytes in both disc and equipment products requires a separate license from Philips.

CLASSIFICATION

The information contained in this document is marked as confidential and shall be treated as confidential according to the provisions of the Agreement through which the document has been obtained.

NOTICE

For any further explanation of the contents of this document, or in case of any perceived inconsistency or ambiguity of interpretation, or for any information regarding the DVD+R 4,7 Gbytes patent license program, please consult:

Philips Intellectual Property & Standards
Business Support, Bldg HTC 44,
High Tech Campus 44,
5656AE Eindhoven,
The Netherlands

E-mail: info.licensing@philips.com
Website: <http://www.ip.philips.com>

Table of contents

Section 1 - General.....	1
1 Scope.....	1
2 Conformance	1
2.1 Optical Disc	1
2.2 Generating system	1
2.3 Receiving system.....	1
2.4 Compatibility statement	1
3 References.....	2
4 Definitions.....	2
4.1 Channel bit.....	2
4.2 Clamping Zone	2
4.3 Digital Sum Value (DSV).....	2
4.4 Disc Reference Plane	2
4.5 dummy substrate.....	2
4.6 entrance surface.....	2
4.7 field	2
4.8 groove.....	2
4.9 interleaving	2
4.10 mark.....	3
4.11 Multi-session disc.....	3
4.12 Physical Sector.....	3
4.13 recording layer	3
4.14 Reed-Solomon code (RS)	3
4.15 Reference velocity	3
4.16 Single-session disc	3
4.17 session	3
4.18 space.....	3
4.19 substrate.....	3
4.20 track.....	3
4.21 track pitch	3
4.22 VCPS	3
4.23 wobble	3
4.24 zone	3
5 Conventions and notations	4
5.1 Representation of numbers	4
5.2 Names	4

6	List of acronyms	4
7	General description of the optical disc	5
8	General Requirements	5
8.1	Environments.....	5
8.1.1	Test environment	5
8.1.2	Operating environment.....	6
8.1.3	Storage environment	6
8.1.4	Transportation	6
8.2	Safety requirements.....	6
8.3	Flammability.....	6
8.4	Light fastness	6
9	Reference Drive	6
9.1	Optical system	6
9.2	Optical beam.....	7
9.3	Read channel 1.....	8
9.4	Disc clamping.....	8
9.5	Rotation of the disc	8
9.6	Wobble channel (Read channel 2)	9
9.7	Tracking channel (Read channel 2)	9
9.8	Reference servo systems.....	9
9.8.1	Normalized servo transfer function	9
9.8.2	Reference Servo for Axial Tracking.....	10
9.8.3	Reference Servo for Radial Tracking	11
	Section 2 - Dimensional, mechanical and physical characteristics of the disc.....	13
10	Dimensional characteristics.....	13
10.1	Reference Planes.....	14
10.2	Overall dimensions	14
10.3	First transition area	14
10.4	Second transition area	14
10.5	Clamping Zone	15
10.6	Third transition area.....	15
10.7	Information Zone	15
10.8	Rim area	15
10.9	Remark on tolerances	15
11	Mechanical characteristics	16
11.1	Mass.....	16
11.2	Moment of inertia	16
11.3	Dynamic imbalance	16
11.4	Axial runout	16

11.4.1	Tracking requirements at the Reference velocity (CLV)	16
11.4.2	Tracking requirements at 3000 RPM (CAV).....	16
11.5	Radial runout.....	17
11.5.1	Tracking requirements at the Reference velocity (CLV)	17
11.5.2	Tracking requirements at 3000 RPM (CAV).....	17
12	Optical characteristics in the Information Zone	18
12.1	Index of refraction	18
12.2	Thickness of the substrate	18
12.3	Reflectivity	18
12.4	Birefringence.....	18
12.5	Angular deviation	19
Section 3 - Format of information.....		21
13	Data format.....	21
13.1	Data Frames	21
13.1.1	Identification Data (ID)	22
13.1.2	ID Error Detection Code (IED)	22
13.1.3	RSV	22
13.1.4	Error Detection Code (EDC)	23
13.2	Scrambled Frames.....	23
13.3	ECC Blocks.....	24
13.4	Recording Frames.....	25
13.5	Modulation and NRZI conversion.....	26
13.6	Physical Sectors	26
13.7	Layout of a Recording UNit (RUN)	28
13.7.1	Recording Unit position.....	28
13.8	d.c. component suppression control	29
14	Track format	30
14.1	Track shape	30
14.2	Track path	30
14.3	Track pitch	30
14.4	Track layout	30
14.4.1	ADIP information	30
14.4.1.1	ADIP word structure.....	31
14.4.1.2	ADIP error correction.....	32
14.4.1.3	ADIP modulation rules	33
14.4.2	Physical format information in ADIP.....	34
14.4.2.1	General information - Bytes 0 to 31.....	36
14.4.2.2	Basic write strategy parameters - Bytes 32 to 63	37
14.4.2.3	Extended Information blocks - Bytes (64 + i×32) to (95 + i×32).....	41
14.4.2.3.1	Extended information for the “4x+” write strategy.....	41
14.4.2.3.2	Extended information for the “6x+” write strategy (8x parameters)	47

14.4.2.3.3	Extended information for the “6x+” write strategy (16x parameters)	52
Section 4 - Format of the Information Zone.....		55
15 General description of the Information Zone		55
16 Layout of the Information Zone of a Single-session disc		55
16.1 Physical Sector Numbers (PSNs)		55
17 Inner Drive Area		56
17.1 Initial Zone		57
17.2 Inner Disc Test Zone		57
17.3 Count Zone Run-in		57
17.4 Inner Disc Count Zone		57
17.5 Inner Disc Administration Zone		57
17.6 Table of Contents (TOC) Zone		58
17.6.1 Table of Contents Blocks		58
17.6.1.1 TOC Items:		60
17.6.2 Recorded Area Indicators (optional)		61
18 Lead-in Zone.....		61
18.1 Guard Zone 1		61
18.2 Reserved Zone 1		61
18.3 Reserved Zone 2		61
18.4 Inner Disc Identification Zone		62
18.5 Reserved Zone 3		62
18.6 Reference Code Zone		62
18.7 Buffer Zone 1		62
18.8 Control Data Zone.....		63
18.8.1 Physical format information		63
18.8.2 Disc manufacturing information		65
18.8.3 Content provider information		65
18.9 Buffer Zone 2		65
19 Data Zone.....		65
20 Lead-out Zone.....		65
20.1 Buffer Zone 3		66
20.2 Outer Disc Identification Zone		66
20.3 Guard Zone 2		66
21 Outer Drive Area.....		66
21.1 Outer Disc Administration Zone		66
21.2 Outer Disc Count Zone		66
21.3 Outer Disc Test Zone		67
21.4 Guard Zone 3		67

22 Multi-session Layout.....	68
22.1 Intro.....	69
22.1.1 Buffer Zone A	69
22.1.2 Inner Session Identification Zone	69
22.1.3 Session Control Data Zone	69
22.1.4 Buffer Zone B	69
22.2 Data Zone.....	69
22.3 Closure	69
22.3.1 Buffer Zone C	69
22.3.2 Outer Session Identification Zone	69
23 Sequential recording in Fragments	70
23.1 Opening a Session	70
23.1.1 Incomplete Fragment	70
23.1.2 Reserved Fragments.....	70
23.1.2.1 Adding a Reserved Fragment	71
23.1.3 Recording User Data in Fragments	71
23.1.4 Closing a Fragment.....	71
23.2 Closing a Session.....	72
23.2.1 Lead-in/Intro Zone	72
23.2.2 Closure Zone.....	72
23.3 Finalizing the disc	72
24 Assignment of Logical Sector Numbers (LSNs)	72
25 Disc Control Blocks.....	73
25.1 General format of Disc Control Blocks	73
25.2 Format of the Session DCB (SDCB)	74
25.2.1 Session Items	76
25.2.1.1 type 1: Fragment item	76
25.2.1.2 type 2: Previous Session item.....	77
Section 5 – Characteristics of the groove.....	79
26 General.....	79
27 Method of testing.....	79
27.1 Environment.....	79
27.2 Reference Drive.....	79
27.2.1 Optics and mechanics	79
27.2.2 Read power	79
27.2.3 Read channels	79
27.2.4 Tracking.....	79
27.3 Definition of signals	80

28	Characteristics of the groove signals	81
28.1	Phase depth.....	81
28.2	Push-pull signal	81
28.3	Track Cross signal	81
28.4	Normalized wobble signal	81
28.5	Characteristics of the wobble.....	81
Section 6 - Characteristics of the recording layer		83
29	Method of testing.....	83
29.1	Environment	83
29.2	Reference Drive	83
29.2.1	Optics and mechanics.....	83
29.2.2	Read power.....	83
29.2.3	Read channels.....	83
29.2.4	Tracking.....	83
29.2.5	Scanning velocity.....	83
29.3	Write conditions	84
29.3.1	Write pulse waveform	84
29.3.2	Write power.....	84
29.3.3	Write power dependency on wavelength	84
29.3.4	Write power window.....	85
29.4	Measurement conditions.....	85
30	Characteristics of the recorded signals.....	86
30.1	Channel bit length.....	86
30.2	Definition of signals.....	86
30.2.1	High frequency signals (HF).....	86
30.2.2	Modulated amplitude.....	86
30.2.3	Signal asymmetry.....	87
30.2.4	Normalized Slicing Level jump	87
30.2.5	Jitter.....	87
30.2.6	Track Cross signal	87
30.3	Read stability.....	87
31	Additional testing conditions.....	88
31.1	Test environment	88
31.1.1	Optics.....	88
31.2	Definition of signals.....	88
31.2.1	Modulated amplitude.....	88
31.2.2	Signal asymmetry.....	88
31.2.3	Jitter.....	88
31.2.4	Track Cross signal	89
31.2.5	Differential phase tracking error signal.....	89
31.2.6	Tangential push-pull signal	90

32	Quality of the recording layer	90
32.1	Defects.....	90
32.2	Data errors	90
Section 7 - Characteristics of user data		91
33	Method of testing.....	91
33.1	Environment.....	91
33.2	Reference Drive.....	91
33.2.1	Optics and mechanics	91
33.2.2	Read power	91
33.2.3	Read channels	91
33.2.4	Error correction.....	91
33.2.5	Tracking.....	91
34	Minimum quality of a Recording Unit.....	92
34.1	Tracking.....	92
34.2	User-written data	92
Annex A	80 mm DVD+R disc	93
Annex B	Structure for Extended format information in the Data Zone	97
Annex C	Measurement of light reflectivity	101
Annex D	Measurement of birefringence	103
Annex E	Measuring conditions for operation signals	105
Annex F	Measurement of the differential phase tracking error	109
Annex G	The write pulse wave form for testing.....	113
Annex H	8-to-16 Modulation	121
Annex I	Optimum Power Control and Recording Conditions	129
Annex J	Running OPC.....	133
Annex K	Wavelength dependency.....	135
Annex L	Explanation about the usage of the reference servos	139
Annex M	Measurement of the groove wobble amplitude.....	145
Annex N	Light fastness of the disc.....	147
Annex O	Transportation.....	149
Annex P	How to use the Physical format information in ADIP.....	151
Annex Q	Values to be Implemented in Existing and Future Specifications	153
List of Changes		157

Section 1 - General

1 Scope

This System Description specifies the mechanical, physical and optical characteristics of 120 mm recordable optical discs with capacities of 4,7 Gbytes and 9,4 Gbytes. It specifies the quality of the recorded and unrecorded signals, the format of the data and the recording method, thereby allowing for information interchange by means of such discs. The data can be written once and read many times using a non-reversible method. These discs are identified as DVD+R.

This System Description also specifies 80 mm discs with capacities of 1,46 Gbytes and 2,92 Gbytes. These discs shall have the same characteristics as the 120 mm discs, except for some parameters related to the smaller dimensions. All parameters unique for the 80 mm discs are specified in Annex A.

This System Description specifies

- two related but different Types of this disc (see clause 7),
- the conditions for conformance,
- the environments in which the disc is to be tested, operated and stored,
- the mechanical, physical and dimensional characteristics of the disc, so as to provide mechanical interchange between data processing systems,
- the format of the information on the disc, including the physical disposition of the tracks and sectors, the error correcting codes and the coding method,
- the characteristics of the signals recorded on the disc, thus enabling data processing systems to read the data from the disc.

This System Description provides for the interchange of discs between optical disc drives. Together with a standard for volume and file structure, it provides for full data interchange between data processing systems.

2 Conformance

2.1 Optical Disc

A claim of conformance with this System Description shall specify the Type implemented. An optical disc shall be in conformance with this System Description if it meets all mandatory requirements specified for its Type.

2.2 Generating system

A generating system shall be in conformance with this System Description if the optical disc it generates is in accordance with 2.1.

2.3 Receiving system

A receiving system shall be in conformance with this System Description if it is able to handle both Types of optical disc according to 2.1.

2.4 Compatibility statement

A claim of conformance by a Generating or Receiving system with this System Description shall include a statement listing any other standards supported. This statement shall specify the numbers of the standards, the optical disc types supported (where appropriate) and whether support includes reading only or both reading and writing.

3 References

- ECMA-43: 8-bit Coded Character Set Structure and Rules (ISO/IEC 4873)
- ECMA-267: 120 mm DVD – Read-Only Disc
- ECMA-268: 80 mm DVD – Read-Only Disc
- ECMA-287: Safety of Electronic Equipment
- DVD+ReWritable, part 1, volume 1, Single Layer:
DVD+RW 4,7 Gbytes, Basic Format Specifications, Royal Philips Electronics
- DVD+ReWritable, part 1, volume 2, Single Layer High Speed:
DVD+RW 4,7 Gbytes, Basic Format Specifications, Royal Philips Electronics
- DVD+ReWritable, part 2, volume 1, Dual Layer:
DVD+RW 8,5 Gbytes, Basic Format Specifications, Royal Philips Electronics
- DVD+Recordable, part 2, volume 1, Dual Layer:
DVD+R 8,5 Gbytes, Basic Format Specifications, Royal Philips Electronics
- VCPS: Video Content Protection System for the DVD+R/+RW Video Recording Format,
System Description, Royal Philips Electronics

4 Definitions

For the purpose of this System Description the following definitions apply:

4.1 Channel bit

The elements by which the binary values ZERO and ONE are represented by marks and spaces on the disc.

4.2 Clamping Zone

The annular part of the disc within which the clamping force is applied by the clamping device.

4.3 Digital Sum Value (DSV)

The arithmetic sum obtained from a bit stream by allocating the decimal value +1 to bits set to ONE and the decimal value –1 to bits set to ZERO.

4.4 Disc Reference Plane

A plane defined by the perfectly flat annular surface of an ideal spindle onto which the clamping Zone of the disc is clamped, and which is normal to the axis of rotation.

4.5 dummy substrate

A layer which may be transparent or not, provided for the mechanical support of the disc and, in some cases, of the recording layer as well.

4.6 entrance surface

The surface of the disc onto which the optical beam first impinges.

4.7 field

A subdivision of a sector.

4.8 groove

A trench-like feature of the disc, applied before the recording of any information, and used to define the track location. The groove is located nearer to the entrance surface than the so-called land in between the grooves. The recording is made on the groove.

4.9 interleaving

The process of reallocating the physical sequence of units of data so as to render the data more immune to burst errors.

4.10 mark

A non-reversible feature of the recording layer which may take the form of less reflective area, a pit, or any other type or form that can be sensed by the optical system. The pattern of marks and spaces represents the data on the disc.

4.11 Multi-session disc

A disc containing more than one set of Lead-in/Intro, Data, and Lead-out/Closure Zones.

4.12 Physical Sector

The smallest addressable part of a track in the Information Zone of a disc that can be accessed independently of other addressable parts of the Zone.

4.13 recording layer

A layer of the disc on which data is written during manufacture and / or use.

4.14 Reed-Solomon code (RS)

An error detection and / or correction code.

4.15 Reference velocity

The Reference velocity is the linear velocity that results in the nominal Channel bit rate of 26,156 25 Mbit/s.

4.16 Single-session disc

A disc containing a Lead-in Zone, one Data Zone, and a Lead-out Zone.

4.17 session

A continuous part of the Information Zone of the disc consisting of a Lead-in or Intro Zone, a Data Zone and a Lead-out or Closure Zone.

4.18 space

A feature of the recording layer represented by any area between two marks which can be sensed by the optical system. The pattern of marks and spaces represents the data on the disc.

4.19 substrate

A transparent layer of the disc, provided for mechanical support of the recording layer, through which the optical beam accesses the recording layer.

4.20 track

A 360° turn of a continuous spiral.

4.21 track pitch

The distance between adjacent track centrelines, measured in a radial direction.

4.22 VCPS

VCPS (Video Content Protection System) defines a method to prevent unauthorized copying and/or redistribution of video data that is recorded in the DVD+R/+RW Video Format.

4.23 wobble

A continuous sinusoidal deviation of the track from the average centreline. Location information is included as phase modulated data in the wobble.

4.24 zone

An annular area of the disc.

5 Conventions and notations

5.1 Representation of numbers

A measured value may be rounded off to the least significant digit of the corresponding specified value. For instance, it implies that a specified value of 1,26 with a positive tolerance of + 0,01 and a negative tolerance of - 0,02 allows a range of measured values from 1,235 to 1,274.

Numbers in decimal notations are represented by the digits 0 to 9.

Numbers in hexadecimal notation are represented by the hexadecimal digits 0 to 9 and A to F in parentheses.

The setting of bits is denoted by ZERO and ONE.

Numbers in binary notations and bit patterns are represented by strings of digits 0 and 1, with the most significant bit shown to the left. In a pattern of n bits, bit b_{n-1} shall be the most significant bit (msb) and bit b_0 shall be the least significant bit (lsb). Bit b_{n-1} shall be recorded first.

Negative values of numbers in binary notation are given as Two's complement.

In each data field, the data is recorded so that the most significant byte (MSB), identified as Byte 0, shall be recorded first and the least significant byte (LSB) last.

In a field of $8n$ bits, bit $b_{(8n-1)}$ shall be the most significant bit (msb) and bit b_0 the least significant bit (lsb). Bit $b_{(8n-1)}$ shall be recorded first.

5.2 Names

The names of entities, e.g. specific tracks, fields, etc., are given with an initial capital.

6 List of acronyms

a.c.	alternating current	NRZ	Non Return to Zero
ADIP	Address in Pre-groove	NRZI	Non Return to Zero Inverted
ASM	Asymmetry	NSL	Normalized Slicing Level
BP	Byte Position	NWPW	Normalized Write Power Window
BPF	Band Pass Filter	OPC	Optimum Power Control
CAV	Constant Angular Velocity	OTP	Opposite Track Path
CLD	Constant Linear Density	PAA	Physical Address in ADIP
CLV	Constant Linear Velocity	PBS	Polarizing Beam Splitter
cm	current mark	PI	Parity of Inner-code
d.c.	direct current	PLL	Phase Locked Loop
DCB	Disc Control Block	PO	Parity of Outer-code
DCC	d.c. component suppression Control	PP	Push-Pull
DSV	Digital Sum Value	pp	peak-to-peak
ECC	Error Correction Code	ps	previous space
EDC	Error Detection Code	PSN	Physical Sector Number
EI	Extended Information	PTP	Parallel Track Path
HF	High Frequency	RIN	Relative Intensity Noise
ID	Identification Data	RPM	Revolutions Per Minute
IED	ID Error Detection code	RS	Reed-Solomon code
LPF	Low Pass filter	RSV	Reserved
LSB	Least Significant Byte		(in use by specific applications)
lsb	Least Significant Bit	RUN	Recording UNit
LSN	Logical Sector Number	SDCB	Session DCB
MSB	Most Significant Byte	SNR	Signal to Noise Ratio
msb	Most Significant Bit	SYNC	Synchronization code
NA	Numerical Aperture	TOC	Table of Contents

7 General description of the optical disc

The optical disc that is the subject of this System Description consists of two substrates bonded together by an adhesive layer, so that the recording layer(s) is (are) on the inside. The centring of the disc is performed on the edge of the centre hole of the assembled disc on the side currently accessed. Clamping is performed in the Clamping Zone. This System Description provides for two Types of such discs.

Type S5 consists of a substrate, a single recording layer and a dummy substrate. The recording layer can be accessed from one side only. The capacity is 4,7 Gbytes for the 120 mm sized disc and 1,46 Gbytes for the 80 mm sized disc.

Type D10 consists of two substrates and two recording layers. From each side of the disc only one of the recording layers can be accessed. The capacity is 9,4 Gbytes for the 120 mm sized disc and 2,92 Gbytes for the 80 mm sized disc.

Data can be written onto the disc as marks in the form of low-reflective spots in the recording layer with a focused optical beam. The data can be read with a focused optical beam, using the difference in the reflectivity between recorded marks and unrecorded spaces. The beam accesses the recording layer through a transparent substrate of the disc.

Figure 1 shows schematically the two Types.

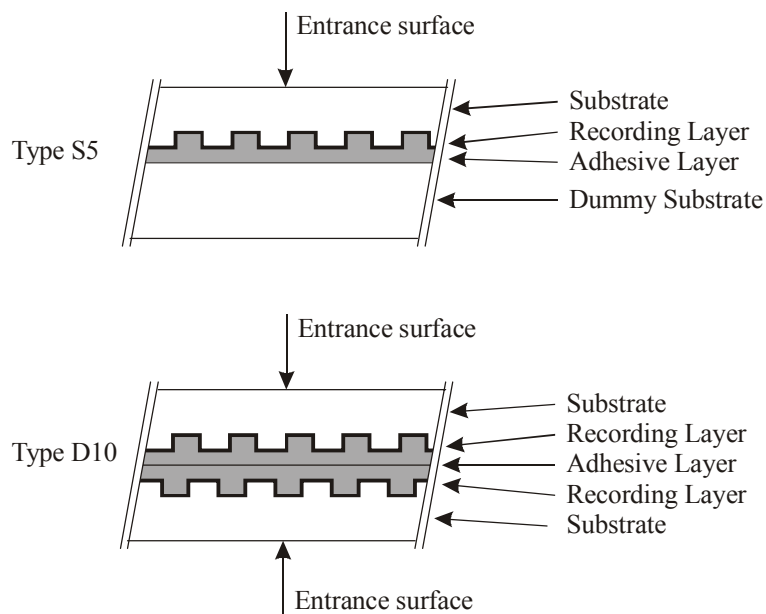


Figure 1 - Types of DVD+R disc

8 General Requirements

8.1 Environments

8.1.1 Test environment

In the test environment, the air immediately surrounding the disc shall have the following properties:

temperature	: 23 °C ± 2 °C
relative humidity	: 45 % to 55 %
atmospheric pressure	: 60 kPa to 106 kPa

No condensation on the disc shall occur. Before testing, the disc shall be conditioned in this environment for 48 h minimum. It is recommended that, before testing, the entrance surface of the disc shall be cleaned according to the instructions of the manufacturer of the disc.

Unless otherwise stated, all tests and measurements shall be made in this test environment.

8.1.2 Operating environment

This System Description requires that a disc which meets all requirements of this System Description in the specified test environment shall provide data interchange over the specified ranges of environmental parameters in the operating environment.

The operating environment is the environment where the air immediately surrounding the disc shall have the following properties:

temperature	: 5 °C to 55 °C
relative humidity	: 3 % to 85 %
absolute humidity	: 1 g/m ³ to 30 g/m ³
atmospheric pressure	: 60 kPa to 106 kPa
temperature gradient	: 10 °C/h max.
relative humidity gradient	: 10 %/h max.

No condensation on the disc shall occur. If the disc has been exposed to conditions outside those specified in this clause, it shall be acclimatized in an allowed operating environment for at least 2 h before use.

8.1.3 Storage environment

The storage environment is defined as the environment where the air immediately surrounding the disc shall have the following properties:

temperature	: -10 °C to 55 °C
relative humidity	: 3 % to 90 %
absolute humidity	: 1 g/m ³ to 30 g/m ³
atmospheric pressure	: 60 kPa to 106 kPa
temperature gradient	: 15 °C/h max.
relative humidity gradient	: 10 %/h max.

No condensation on the disc shall occur.

8.1.4 Transportation

This System Description does not specify requirements for transportation; guidance is given in Annex O.

8.2 Safety requirements

The disc shall satisfy the safety requirements of Standard ECMA-287, when used in the intended manner or in any foreseeable use in an information processing system.

8.3 Flammability

The disc and its components shall be made from materials that comply with the flammability class for HB materials, or better, as specified in Standard ECMA-287.

8.4 Light fastness

The disk and its components should be made from materials that are able to withstand a certain amount of light. A method of testing such light fastness is given in Annex N.

9 Reference Drive

The Reference Drive shall be used for the measurement of optical parameters for conformance with the requirements of this System Description. The critical components of this device have the characteristics specified in this clause.

9.1 Optical system

The basic set-up of the optical system of the Reference Drive used for measuring the write and read parameters is shown in Figure 2. Different components and locations of components are permitted, provided that the performance remains the same as that of the set-up in Figure 2.

The optical system shall be such that the detected light reflected from the entrance surface of the disc is minimized so as not to influence the accuracy of the measurements.

The combination of polarizing beam splitter C and a quarter-wave plate D shall separate the entrance optical beam from the laser diode A and the reflected optical beam from the optical disc F. The beam splitter C shall have a p-s intensity reflectance ratio of at least 100.

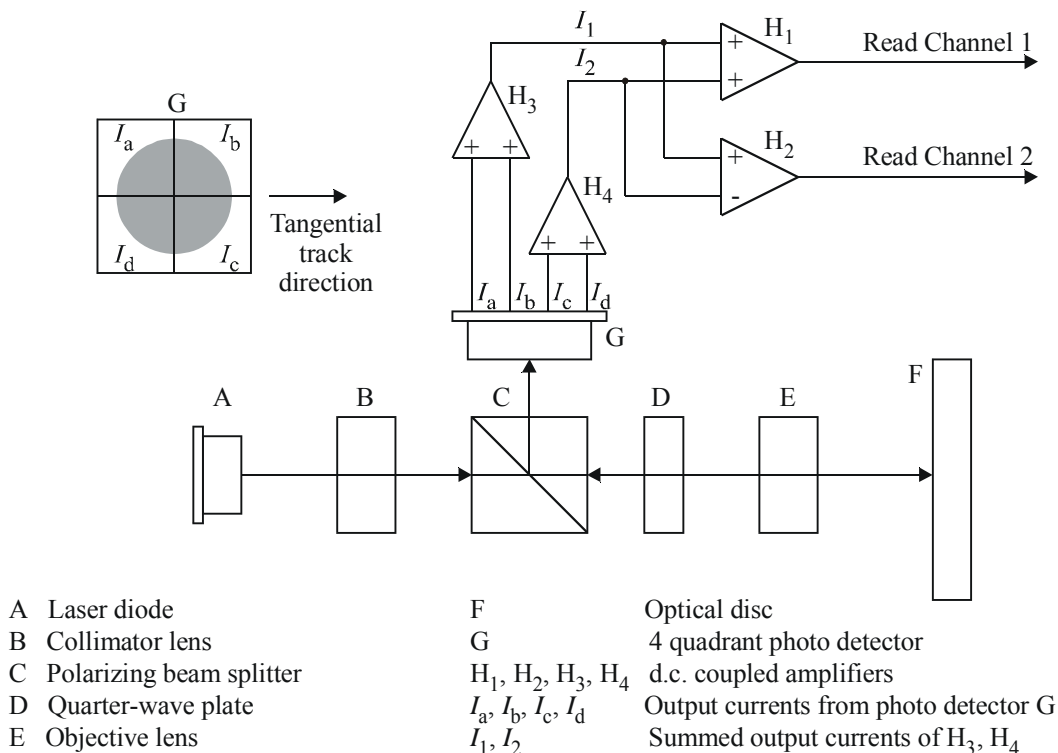


Figure 2 - Optical system of the Reference Drive

9.2 Optical beam

The focused optical beam used for writing and reading data shall have the following properties:

- | | |
|--|---|
| a) Wavelength (λ) | $655 \text{ nm} \begin{smallmatrix} + 10 \text{ nm} \\ - 5 \text{ nm} \end{smallmatrix}$ (see Annex K) |
| b) Numerical aperture of the objective lens (NA) | $0,65 \pm 0,01$ |
| c) The objective lens shall be compensated for spherical aberrations caused by a parallel substrate with nominal thickness (0,6 mm) and nominal refractive index (1,55). | |
| d) Wave front aberration | $0,033 \times \lambda$ rms max. |
| e) Light intensity at the rim of the pupil of the objective lens | 35 % to 50 % of the maximum intensity in the radial direction and 45 % to 60 % in the tangential direction. |
| f) Polarization of the light | circular |
| g) Read power (average) | $0,7 \text{ mW} \pm 0,1 \text{ mW}$
(d.c. or HF modulated with a frequency >400 MHz) |
| h) Write power and pulse width | see Annex G |
| i) Relative Intensity Noise (RIN)* of the laser diode | -134 dB/Hz max. |

*RIN (dB/Hz) = $10 \log [(a.c. \text{ light power density} / \text{Hz}) / d.c. \text{ light power}]$

9.3 Read channel 1

Read channel 1 shall be provided to generate signals from the marks and spaces in the recording layer. This Read channel shall be used for reading the user-written information, using the change in reflectivity of the marks and spaces. The read amplifiers after the photo detectors in the Read channel shall have a flat response within 1 dB from d.c. to 20 MHz.

For measurement of jitter, the characteristics of the PLL and the slicer, etc. are specified in Annex E.

9.4 Disc clamping

For measuring, the disc shall be clamped between two concentric rings covering most of the Clamping Zone (see 10.5). The top clamping area shall have the same diameters as the bottom clamping area (Figure 3).

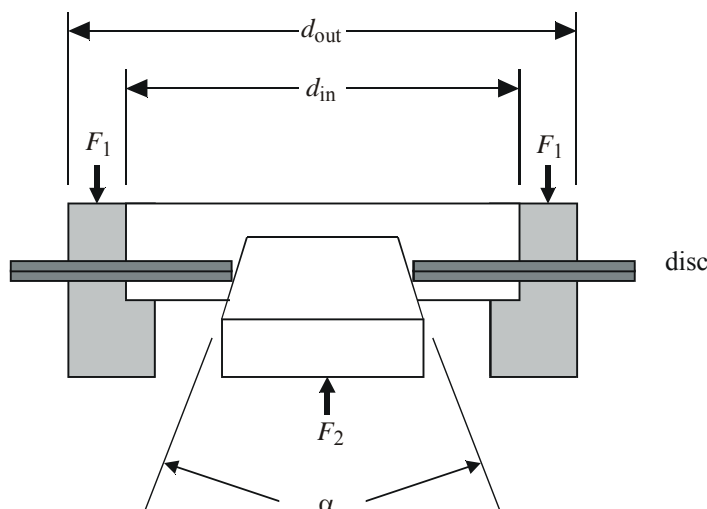


Figure 3 - Clamping and chucking conditions

Clamping shall occur between

$$d_{in} = 22,3 \text{ mm}^{+0,5\text{mm}}_{-0,0\text{mm}} \quad \text{and} \quad d_{out} = 32,7 \text{ mm}^{+0,0\text{mm}}_{-0,5\text{mm}}$$

The total clamping force shall be $F_1 = 2,0 \text{ N} \pm 0,5 \text{ N}$. In order to prevent warping of the disc under the moment of force generated by the clamping force and the chucking force F_2 exerted on the rim of the centre hole of the disc, F_2 shall not exceed 0,5 N (see Figure 3).

The tapered cone angle, α , shall be $40,0^\circ \pm 0,5^\circ$.

9.5 Rotation of the disc

The actual rotation speed for reading the disc shall be such that it results in the Reference velocity of $3,49 \text{ m/s} \pm 0,03 \text{ m/s}$ at the nominal Channel bit rate of 26,156 25 Mbit/s. The direction of rotation shall be counter-clockwise when viewed from the objective lens.

The actual rotation speed (v_{actual}) for writing the disc shall be such that it includes all Primary and Upper velocities for which parameters are specified in the Physical format information in the ADIP Aux Frames in the Lead-in Zone of the disc (see 14.4.1.1 and 14.4.2).

Note: the rotational speed of the disc is depending on the radial position: angular velocity = $60 \times \frac{v_{\text{actual}}}{2\pi \times r}$ RPM

When testing the disc the actual speed is limited such that the angular velocity does not exceed 10 000 RPM.

9.6 Wobble channel (Read channel 2)

Read channel 2 of the drive provides the wobble signals to control the access to addressed locations on the disc during writing. The wobble signal is generated in Read Channel 2 as a signal $(I_1 - I_2)$ related to the difference in the amount of light in the two halves of the exit pupil of the objective lens. The read amplifiers after the photo detectors in the Read channel shall have a flat response within 1 dB from d.c. to 20 MHz.

9.7 Tracking channel (Read channel 2)

Read channel 2 of the drive provides the tracking error signals to control the servos for radial tracking of the optical beam. The radial tracking error is generated in Read Channel 2 as a signal $(I_1 - I_2)$ related to the difference in the amount of light in the two halves of the exit pupil of the objective lens.

The method of generating the axial tracking error is not specified for the Reference Drive.

9.8 Reference servo systems

9.8.1 Normalized servo transfer function

The open-loop transfer function, $H_s(i\omega)$ for the axial and radial tracking servos is given by equation (1),

$$H_s(i\omega) = \frac{1}{3} \times \left(\frac{\omega_0}{i\omega} \right)^2 \times \frac{1 + \frac{3i\omega}{\omega_0}}{1 + \frac{i\omega}{3\omega_0}} \quad (1)$$

where

$$i = \sqrt{-1}$$

$$\omega = 2\pi f$$

$$\omega_0 = 2\pi f_0$$

and f_0 is the 0 dB crossover frequency of the open-loop transfer function.

The crossover frequencies of the lead-lag network of the servo are

$$\text{lead break frequency: } f_1 = f_0 / 3$$

$$\text{lag break frequency: } f_2 = f_0 \times 3$$

Another frequency of importance is the frequency f_X at which a sinusoidal displacement with an amplitude equal to the maximum allowed residual tracking error e_{\max} , corresponds to the maximum expected acceleration α_{\max} . This frequency can be calculated as follows:

$$f_X = \frac{1}{2\pi} \sqrt{\frac{\alpha_{\max}}{e_{\max}}}$$

Because the tracking error signals from the disc can have rather large variations, the tracking error signal fed into each reference servo loop shall be adjusted to a fixed level (effectively calibrating the total loop gain), such to guarantee the specified bandwidth.

9.8.2 Reference Servo for Axial Tracking

The crossover frequency of the normalized servo transfer function (H_s) for axial tracking, $f_0 = \omega_0 / (2\pi)$ shall be given by equation (2), where α_{\max} is the maximum expected axial acceleration of $8,0 \text{ m/s}^2$, which is multiplied by a factor $m = 1,5$ for servo margin. The tracking error e_{\max} , caused by this $m \times \alpha_{\max}$, shall be $0,20 \text{ } \mu\text{m}$.

Thus the crossover frequency f_0 shall be given by

$$f_0 = \frac{1}{2\pi} \sqrt{\frac{3 \times m \times \alpha_{\max}}{e_{\max}}} = \frac{1}{2\pi} \sqrt{\frac{3 \times 1,5 \times 8}{0,20 \times 10^{-6}}} = 2,1 \text{ kHz} \quad (2)$$

For an open loop transfer function H of the Reference Servo for axial tracking, $|1+H|$ is limited as schematically shown by the shaded region of Figure 4.

Bandwidth from 100 Hz to 10 kHz

$|1+H|$ shall be within 20% of $|1+H_s|$.

Bandwidth from 26 Hz to 100 Hz

$|1+H|$ shall be within the limits enclosed by the following four points.

- 1) 41,7 dB at 100 Hz ($|1+H_s|$ at 100 Hz - 20%)
- 2) 45,2 dB at 100 Hz ($|1+H_s|$ at 100 Hz + 20%)
- 3) 65,1 dB at 26 Hz ($|1+H_s|$ at 26 Hz - 20%)
- 4) 85,1 dB at 26 Hz ($|1+H_s|$ at 26 Hz - 20% + 20 dB)

Bandwidth from 9,5 Hz to 26 Hz

$|1+H|$ shall be between 65,1 dB and 85,1 dB.

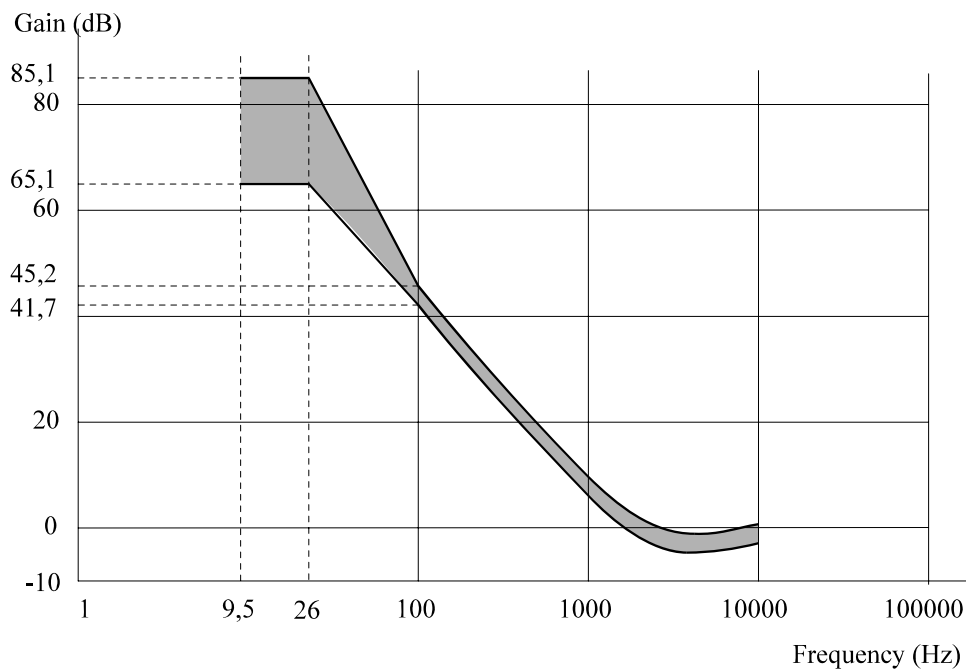


Figure 4 - Reference servo for axial tracking

9.8.3 Reference Servo for Radial Tracking

The crossover frequency of the normalized servo transfer function (H_s) for radial tracking, $f_0 = \omega_0 / (2\pi)$ shall be given by equation (3), where α_{\max} is the maximum expected radial acceleration of $1,1 \text{ m/s}^2$, which is multiplied by a factor $m = 1,5$ for servo margin. The tracking error e_{\max} , caused by this $m \times \alpha_{\max}$, shall be $0,022 \text{ } \mu\text{m}$.

Thus the crossover frequency f_0 shall be given by

$$f_0 = \frac{1}{2\pi} \sqrt{\frac{3 \times m \times \alpha_{\max}}{e_{\max}}} = \frac{1}{2\pi} \sqrt{\frac{3 \times 1,5 \times 1,1}{0,022 \times 10^{-6}}} = 2,4 \text{ kHz} \quad (3)$$

For an open loop transfer function H of the Reference Servo for radial tracking, $|1+H|$ is limited as schematically shown by the shaded region of Figure 5.

Bandwidth from 100 Hz to 10 kHz

$|1+H|$ shall be within 20% of $|1+H_s|$.

Bandwidth from 28,2 Hz to 100 Hz

$|1+H|$ shall be within the limits enclosed by the following four points.

- 1) 43,7 dB at 100 Hz ($|1+H_s|$ at 100 Hz - 20%)
- 2) 47,2 dB at 100 Hz ($|1+H_s|$ at 100 Hz + 20%)
- 3) 65,6 dB at 28,2 Hz ($|1+H_s|$ at 28,2 Hz - 20%)
- 4) 85,6 dB at 28,2 Hz ($|1+H_s|$ at 28,2 Hz - 20% + 20 dB)

Bandwidth from 9,5 Hz to 28,2 Hz

$|1+H|$ shall be between 65,6 dB and 85,6 dB.

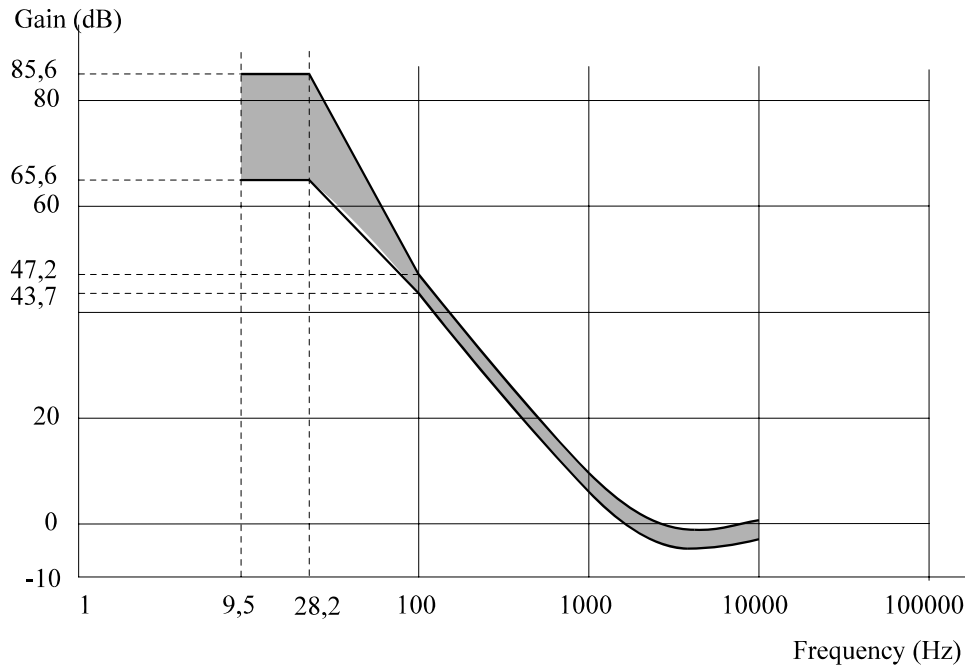


Figure 5 - Reference servo for radial tracking

This page is intentionally left blank

Section 2 - Dimensional, mechanical and physical characteristics of the disc

10 Dimensional characteristics

Dimensional characteristics are specified for those parameters deemed mandatory for interchange and compatible use of the disc. Where there is freedom of design, only the functional characteristics of the elements described are indicated. The enclosed drawing, Figure 6 shows the dimensional requirements in summarized form. The different parts of the disc are described from the centre hole to the outside rim.

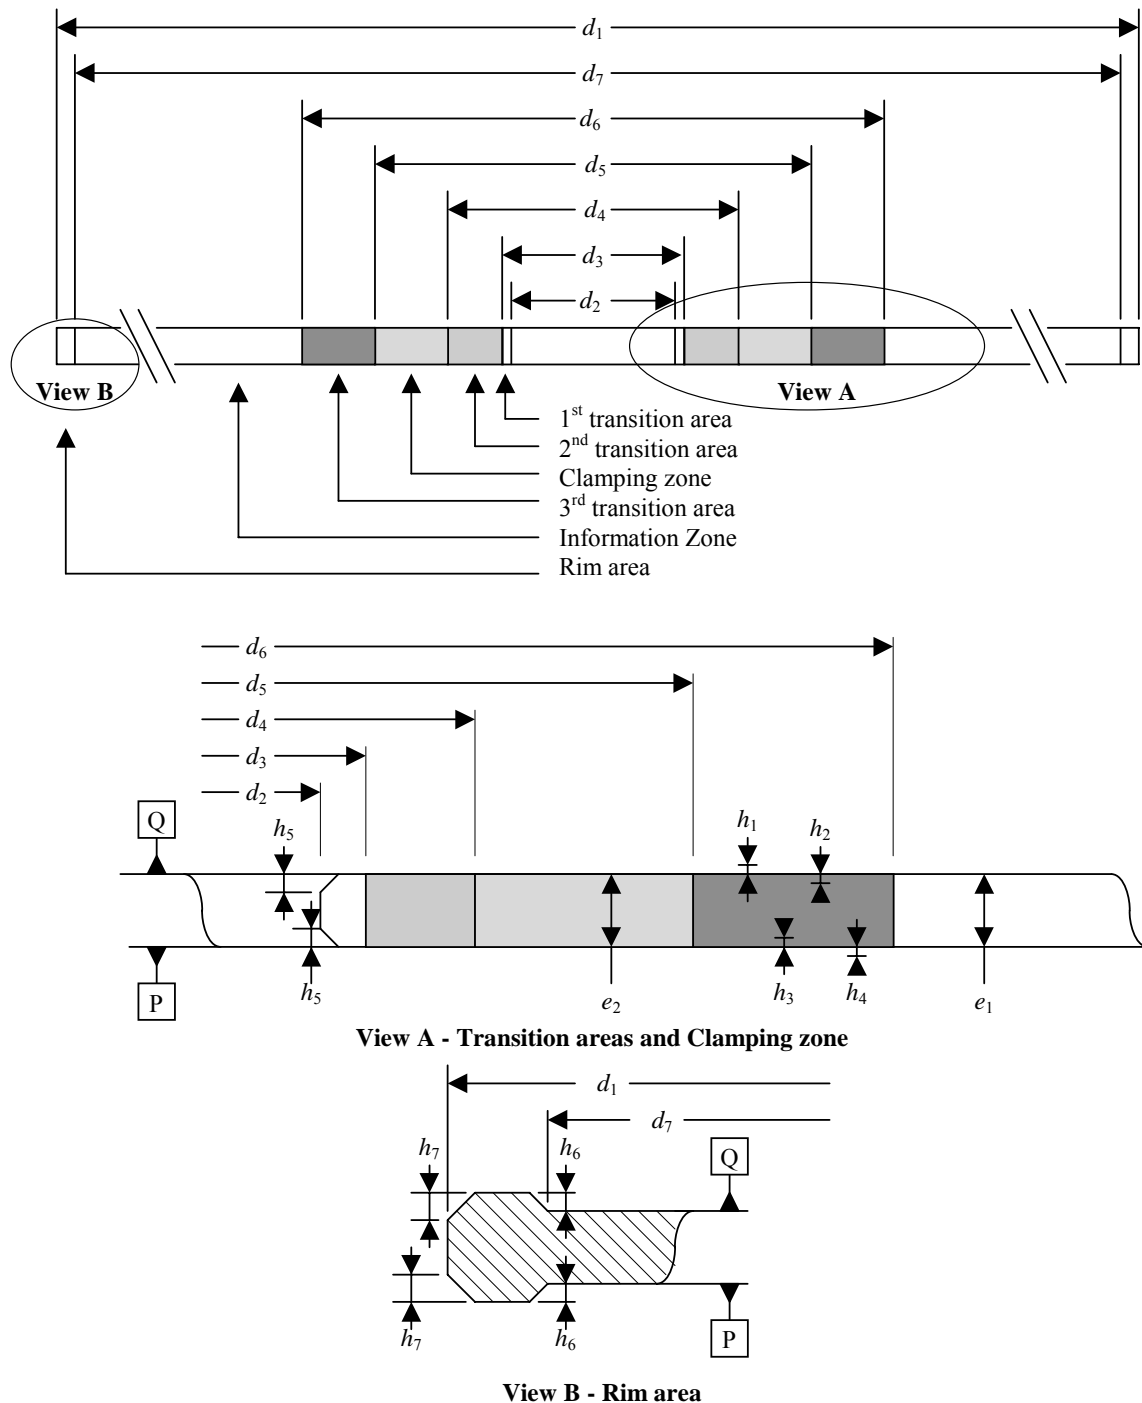


Figure 6 - Physical disc dimensions

10.1 Reference Planes

The dimensions are referred to two Reference Planes P and Q.

Reference Plane P is the primary Reference Plane. It is the plane on which the bottom surface of the Clamping Zone rests (see 10.5).

Reference Plane Q is the plane parallel to Reference Plane P at the height of the top surface of the Clamping Zone (see Figure 6).

10.2 Overall dimensions

The disc shall have an overall diameter (for 80 mm disc see Annex A)

$$d_1 = 120,00 \text{ mm} \pm 0,30 \text{ mm}$$

The centre hole of a substrate or a dummy substrate shall have a diameter (see Figure 7)

$$d_{\text{substrate}} = 15,00 \text{ mm} \begin{matrix} +0,15 \text{ mm} \\ -0,00 \text{ mm} \end{matrix}$$

The hole of an assembled disc, i.e. with both parts bonded together, shall have a diameter

$$d_2 = 15,00 \text{ mm min.}$$

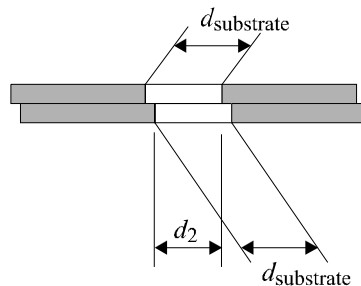


Figure 7 - Hole diameters for an assembled disc

The corners of the centre hole shall be free of any burrs or sharp features and shall be rounded off or chamfered by

$$h_5 = 0,1 \text{ mm max.}$$

The thickness of the disc shall be

$$e_1 = 1,20 \text{ mm} \begin{matrix} +0,30 \text{ mm} \\ -0,06 \text{ mm} \end{matrix}$$

10.3 First transition area

In the area defined by d_2 and

$$d_3 = 16,0 \text{ mm min.}$$

the surface of the disc is permitted to be above Reference Plane P and/or below Reference Plane Q by 0,10 mm max.

10.4 Second transition area

This area shall extend between diameter d_3 and diameter

$$d_4 = 22,0 \text{ mm max.}$$

In this area the disc may have an uneven surface or burrs up to 0,05 mm max. beyond Reference Planes P and/or Q.

10.5 Clamping Zone

This Zone shall extend between diameter d_4 and diameter

$$d_5 = 33,0 \text{ mm min.}$$

Each side of the Clamping Zone shall be flat within 0,1 mm. The top side of the Clamping Zone, i.e. that of Reference Plane Q shall be parallel to the bottom side, i.e. that of Reference Plane P within 0,1 mm.

In the Clamping Zone the thickness e_2 of the disc shall be

$$e_2 = 1,20 \text{ mm } \begin{matrix} +0,20 \text{ mm} \\ -0,10 \text{ mm} \end{matrix}$$

10.6 Third transition area

This area shall extend between diameter d_5 and diameter

$$d_6 = 44,0 \text{ mm max.}$$

In this area the top surface is permitted to be above Reference Plane Q by

$$h_1 = 0,25 \text{ mm max.}$$

or below Reference Plane Q by

$$h_2 = 0,10 \text{ mm max.}$$

The bottom surface is permitted to be above Reference Plane P by

$$h_3 = 0,10 \text{ mm max.}$$

or below Reference Plane P by

$$h_4 = 0,25 \text{ mm max.}$$

10.7 Information Zone

The Information Zone shall extend from diameter d_6 to diameter

$$d_7 = 117,5 \text{ mm min (for 80 mm disc see Annex A).}$$

This Zone consists of the Lead-in Zone, the Data Zone, the Lead-out Zone and the Inner and Outer Drive Areas (see also clause 15).

10.8 Rim area

The rim area is that area extending from diameter d_7 to diameter d_1 . In this area the surfaces are permitted to both extend beyond Reference Plane Q or Reference Plane P

$$h_6 = 0,1 \text{ mm max.}$$

The outer corners of the disc shall be free of any burrs or sharp features and shall be rounded off or chamfered by

$$h_7 = 0,2 \text{ mm max.}$$

10.9 Remark on tolerances

All heights specified in the preceding clauses and indicated by h_i are independent from each other. This means that, for example, if the top surface of the third transition area is below Reference Plane Q by up to h_2 , there is no implication that the bottom surface of this area has to be above Reference Plane P by up to h_3 . Where dimensions have the same - generally maximum - numerical value, this does not imply that the actual values have to be identical.

11 Mechanical characteristics

11.1 Mass

The mass of the disc shall be in the range of 13,0 g to 20,0 g (for 80 mm disc see Annex A).

11.2 Moment of inertia

The moment of inertia of the disc, relative to its rotation axis, shall not exceed 0,040 g·m² (for 80 mm disc see Annex A).

11.3 Dynamic imbalance

The dynamic imbalance of the disc, relative to its rotation axis, shall not exceed 2,5 g·mm (for 80 mm disc see Annex A).

11.4 Axial runout

When measured by the optical system with the Reference Servo for axial tracking, the disc rotating at the Reference velocity of 3,49 m/s (see 9.5), the deviation of the recording layer from its nominal position in the direction normal to the Reference Planes shall not exceed 0,30 mm.

Some explanation about the use of the Reference Servo as a measurement tool and the way to translate the measurement results to a practical implementation for a high-speed servo is given in Annex L.

11.4.1 Tracking requirements at the Reference velocity (CLV)

The residual tracking error below 10 kHz, measured on the blank disc using the Reference Servo for axial tracking and the disc rotating at the Reference velocity, shall not exceed 0,13 µm (displacement of the objective lens needed to move the focal point of the optical beam onto the recording layer).

The measuring filter shall be a Butterworth LPF, f_c (-3 dB): 10 kHz, with slope : -80 dB/decade.

11.4.2 Tracking requirements at 3000 RPM (CAV)

Discs suited to be recorded at speeds $> 4 \times$ the **Reference velocity**, shall also fulfill the following requirement:

the residual tracking error below 10 kHz, measured on the blank disc using the Reference Servo for axial tracking and the disc rotating at a fixed rotational speed of 3000 RPM, shall not exceed $E_{ax}(r)$ µm, where E_{ax} is a function of the radius r according to the following specifications:

for $r \leq 29$ mm: $E_{ax}(r) = 0,20$ µm

for $r \geq 29$ mm: $E_{ax}(r) = \left(\frac{r}{29}\right)^2 \times 0,20$ µm with r expressed in mm.

Discs suited to be recorded at speeds $> 8 \times$ the **Reference velocity**, shall furthermore fulfil the following requirement, additional to the requirement above:

the residual tracking error shall not exceed 0,40 µm at any radius.

If present, the 50 Hz component shall be removed from the residual tracking error before applying these requirements (e.g. by software processing of the sampled measurement data).

11.5 Radial runout

The runout of the outer edge of the disc shall not exceed 0,30 mm peak-to-peak.

The radial runout of tracks shall not exceed 70 μm peak-to-peak.

Some explanation about the use of the Reference Servo as a measurement tool and the way to translate the measurement results to a practical implementation for a high-speed servo is given in Annex L.

11.5.1 Tracking requirements at the Reference velocity (CLV)

The residual tracking error below 1,1 kHz ($= f_X$ as defined in 9.8), measured on the blank disc using the Reference Servo for radial tracking and the disc rotating at the Reference velocity of 3,49 m/s (see 9.5), shall not exceed 0,015 μm .

The measuring filter shall be a Butterworth LPF, f_c (-3 dB) : 1,1 kHz, with slope : -80 dB/decade.

The rms noise value of the residual error signal in the frequency band from 1,1 kHz to 10 kHz, measured with an integration time of 20 ms, using the Reference Servo for radial tracking, shall not exceed 0,016 μm . The measuring filter shall be a Butterworth BPF,

frequency range (-3 dB) : 1,1 kHz, with slope : +80 dB/decade
to : 10 kHz, with slope : -80 dB/decade.

11.5.2 Tracking requirements at 3000 RPM (CAV)

Discs suited to be recorded at speeds $> 4 \times$ the **Reference velocity**, shall also fulfill the following requirement:

the residual tracking error below 10 kHz, measured on the blank disc using the Reference Servo for radial tracking and the disc rotating at a fixed rotational speed of 3000 RPM, shall not exceed $E_{\text{rad}}(r)$ μm , where E_{rad} is a function of the radius r according to the following specifications:

for $r \leq 29$ mm: $E_{\text{rad}}(r) = 0,025$ μm

for $r \geq 29$ mm: $E_{\text{rad}}(r) = \left(\frac{r}{29}\right)^2 \times 0,025$ μm with r expressed in mm.

Discs suited to be recorded at speeds $> 8 \times$ the **Reference velocity**, shall furthermore fulfil the following requirement, additional to the requirement above:

the residual tracking error shall not exceed 0,055 μm at any radius.

If present, the 50 Hz component shall be removed from the residual tracking error before applying these requirements (e.g. by software processing of the sampled measurement data). This process effectively removes the influence of the pure eccentricity of the disc.

12 Optical characteristics in the Information Zone

12.1 Index of refraction

The index of refraction of the substrate in the Information Zone shall be $1,55 \pm 0,10$.

12.2 Thickness of the substrate

The thickness of the substrate, from the entrance surface to the recording layer, varies with the index of refraction of the substrate and shall be defined as the enclosed region in Figure 8.

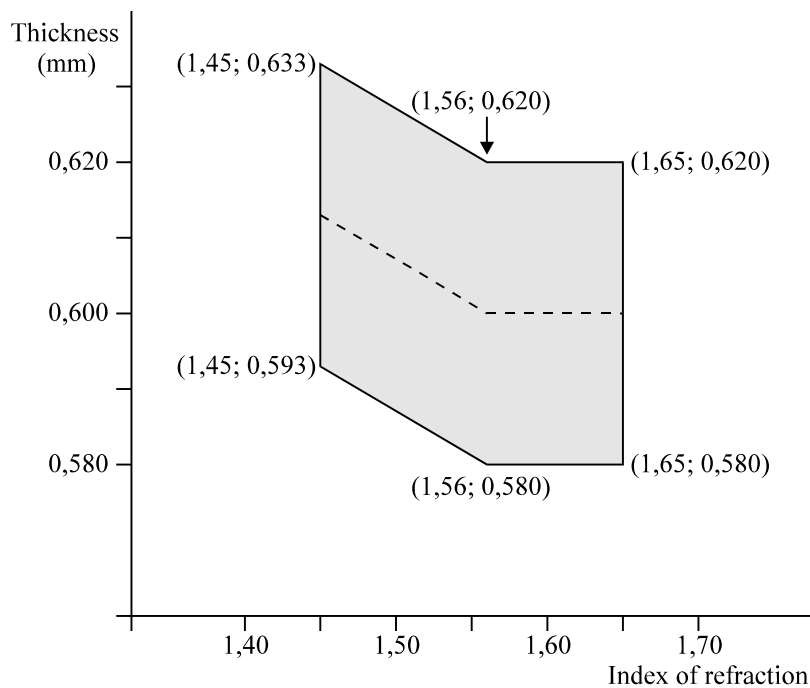


Figure 8 - Thickness of the substrate

12.3 Reflectivity

The double-pass optical transmission of the substrate and the reflectivity of the recording layer are measured together as the reflectance R of the disc. When measured according to Annex C the value of R shall be

in the Information Zone $45\% \leq R_d \leq 85\%$ in the unrecorded groove

$45\% \leq R_{14H} \leq 85\%$ in the recorded groove

The product of the reflectance of the unrecorded groove R_d and the optimized write power P_{peak} for the write strategy concerned (see 29.3.2) shall fulfil the following requirement:

$$R_d \times \text{actual } P_{peak} \leq \frac{P_{peak_max \text{ for } \lambda \leq \lambda_{IND} \text{ for write strategy concerned}}}{P_{peak_max \text{ for } \lambda \leq \lambda_{IND} \text{ for basic write strategy}}} \times 9 \text{ mW}$$

12.4 Birefringence

The birefringence of the substrate shall not exceed 60 nm when measured according to Annex D.

12.5 Angular deviation

The angular deviation is the angle α between a parallel incident beam perpendicular to the Reference Plane P and the reflected beam (see Figure 9). The incident beam shall have a diameter in the range 0,30 mm to 3,0 mm. This angle α includes deflection due to the entrance surface and to the unparallelism of the recording layer with the entrance surface.

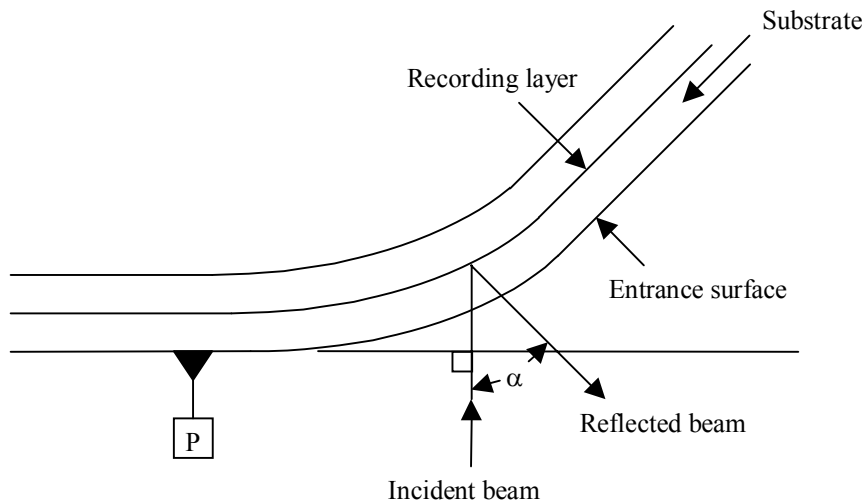


Figure 9 - Angular deviation α

The angular deviation shall be

In radial direction : $|\alpha| = 0,70^\circ \text{ max.}$

The variation of α in radial direction over one revolution shall be $0,80^\circ \text{ peak-to-peak max.}$

In tangential direction : $|\alpha| = 0,30^\circ \text{ max.}$

This page is intentionally left blank

Section 3 - Format of information

13 Data format

The data received from the host, called Main Data, is formatted in a number of steps before being recorded on the disc.

It is transformed successively into

- a Data Frame,
- a Scrambled Frame,
- an ECC Block,
- 16 Recording Frames,
- 16 Physical Sectors,
- a Recording Unit.

These steps are specified in the following clauses.

13.1 Data Frames

A Data Frame shall consist of 2 064 bytes arranged in an array of 12 rows each containing 172 bytes (Figure 10). The first row shall start with three fields, called Identification Data (ID), ID Error Detection Code (IED), and RSV bytes, followed by 160 Main Data bytes. The next 10 rows shall each contain 172 Main Data bytes, and the last row shall contain 168 Main Data bytes followed by four bytes for recording an Error Detection Code (EDC). The 2 048 Main Data bytes are identified as D_0 to $D_{2\,047}$.

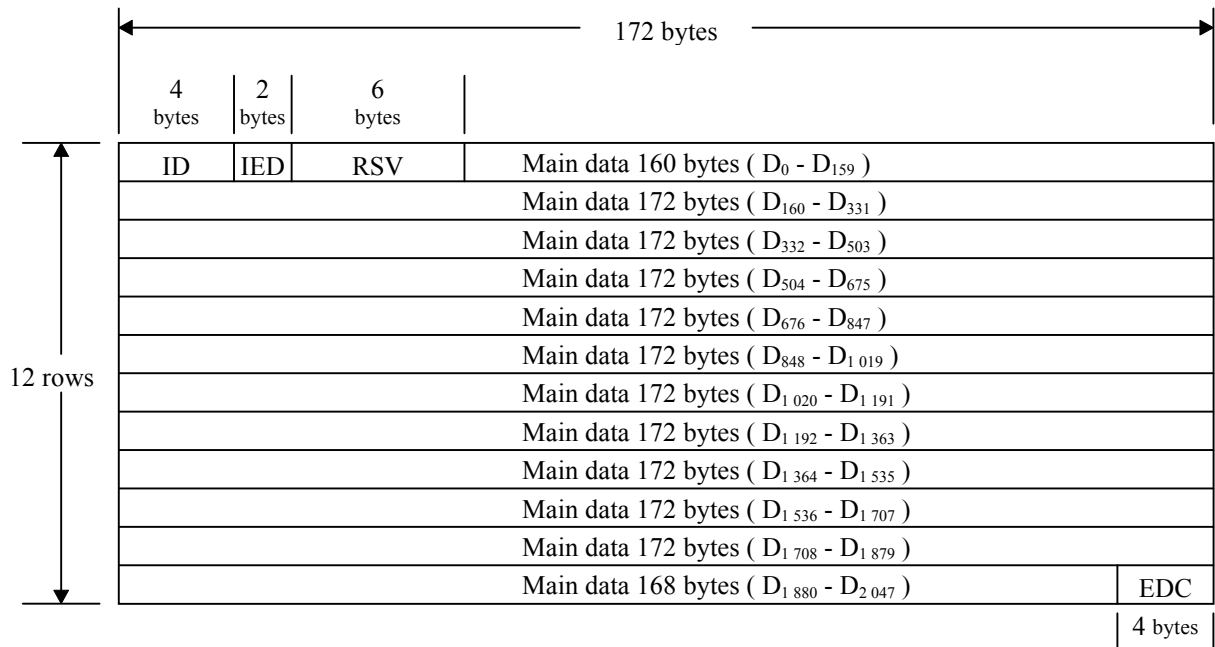


Figure 10 - Data Frame

13.1.1 Identification Data (ID)

This field shall consist of four bytes, the bits of which are numbered consecutively from b_0 (lsb) to b_{31} (msb), see Figure 11.

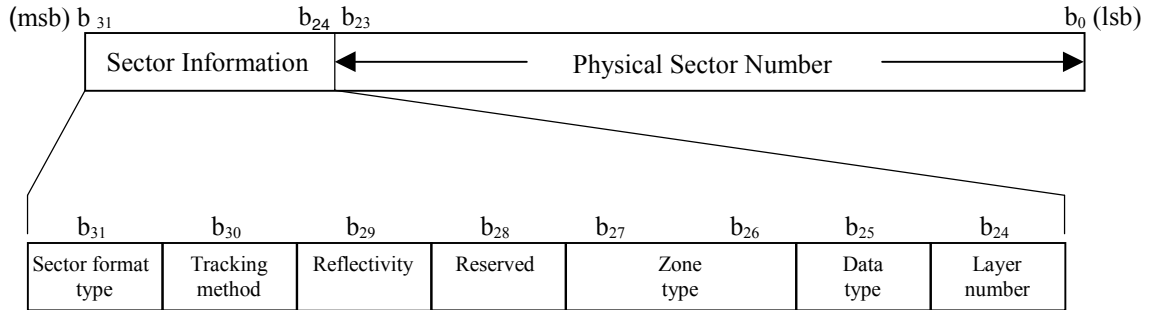


Figure 11 - Identification Data (ID)

The bits of the most significant byte, the Sector Information, shall be set as follows:

- Bit b_{31} shall be set to ZERO, indicating a CLD format
- Bit b_{30} shall be set to ZERO, indicating pit tracking capability (see 31.2.5)
- Bit b_{29} shall be set to ZERO indicating that the reflectance is greater than 40 %
- Bit b_{28} shall be set to ZERO
- Bits b_{27} to b_{26} shall be set to
ZERO ZERO in the Data Zone
ZERO ONE in the Lead-in Zone
ONE ZERO in the Lead-out Zone
- Bit b_{25} shall be set to ZERO, indicating read only data.
- Bit b_{24} shall be set to ZERO, indicating that through an entrance surface only one recording layer can be accessed

The least significant three bytes, bits b_{23} to b_0 , shall specify the Physical Sector Number in binary notation. The Physical Sector Number of the first Physical Sector of an ECC Block shall be an integer multiple of 16.

13.1.2 ID Error Detection Code (IED)

When identifying all bytes of the array shown in Figure 10 as $C_{i,j}$ for $i = 0$ to 11 and $j = 0$ to 171, the bytes of IED are represented by $C_{0,j}$ for $j = 4$ to 5. Their setting is obtained as follows.

$$IED(x) = \sum_{j=4}^5 C_{0,j} x^{5-j} = I(x) x^2 \bmod GE(x)$$

where

$$I(x) = \sum_{j=0}^3 C_{0,j} x^{3-j} \quad \text{and} \quad GE(x) = (x+1)(x+\alpha)$$

α is the primitive root of the primitive polynomial $P(x) = x^8 + x^4 + x^3 + x^2 + 1$

13.1.3 RSV

This field shall consist of 6 bytes. The first byte may be set by the application. If not specified by the application, it is reserved and shall be set to (00). The remaining 5 bytes are reserved and shall all be set to (00). Under no circumstance may other data received from the host be recorded in this field.

Circumvention: Recorders and recording drives shall be considered as circumvention devices when these are produced to record, or can easily be modified to record, in any manner, a user-defined number in this field.

13.1.4 Error Detection Code (EDC)

This 4-byte field shall contain the parities of an Error Detection Code computed over the preceding 2 060 bytes of the Data Frame. Considering the Data Frame as a single bit field starting with the most significant bit of the first byte of the ID field and ending with the least significant bit of the EDC field, then this msb will be $b_{16\ 511}$ and the lsb will be b_0 . Each bit b_i of the EDC is shown as follows for $i = 0$ to 31:

$$\text{EDC}(x) = \sum_{i=0}^{31} b_i x^i = I(x) \bmod G(x)$$

where

$$I(x) = \sum_{i=32}^{16\ 511} b_i x^i \quad \text{and} \quad G(x) = x^{32} + x^{31} + x^4 + 1$$

13.2 Scrambled Frames

The 2 048 Main Data bytes shall be scrambled by means of the circuit shown in Figure 12 which shall consist of a feedback bit shift register in which bits r_7 (msb) to r_0 (lsb) represent a scrambling byte at each 8-bit shift.

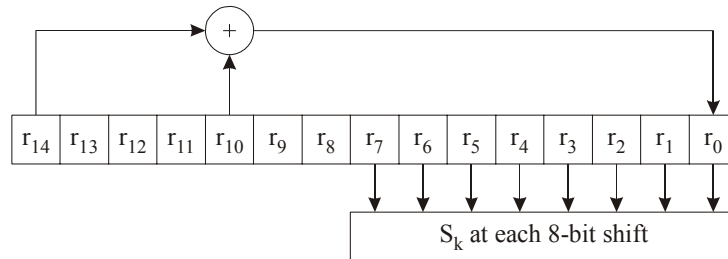


Figure 12 - Feedback shift register

At the beginning of the scrambling procedure of a Data Frame, positions r_{14} to r_0 shall be pre-set to the value(s) specified in Table 1 (the msb of the pre-set value shall be discarded). The same pre-set value shall be used for 16 consecutive Data Frames. After 16 groups of 16 Data Frames, the sequence is repeated. The initial pre-set number is equal to the value represented by bits b_7 (msb) to b_4 (lsb) of the ID field of the Data Frame. Table 1 specifies the initial pre-set value of the shift register corresponding to the 16 initial pre-set numbers.

Table 1 - Initial values of the shift register

Initial pre-set number	Initial pre-set value	Initial pre-set number	Initial pre-set value
(0)	(0001)	(8)	(0010)
(1)	(5500)	(9)	(5000)
(2)	(0002)	(A)	(0020)
(3)	(2A00)	(B)	(2001)
(4)	(0004)	(C)	(0040)
(5)	(5400)	(D)	(4002)
(6)	(0008)	(E)	(0080)
(7)	(2800)	(F)	(0005)

The part of the initial value of r_7 to r_0 is taken out as scrambling byte S_0 . After that, an 8-bit shift is repeated 2 047 times and the following 2 047 bytes shall be taken from r_7 to r_0 as scrambling bytes S_1 to $S_{2\ 047}$. The Main Data bytes D_k of the Data Frame become scrambled bytes D'_k where

$$D'_k = D_k \oplus S_k \quad \text{for } k = 0 \text{ to } 2\ 047 \quad (\oplus \text{ stands for Exclusive OR})$$

13.3 ECC Blocks

An ECC Block is formed by arranging 16 consecutive Scrambled Frames in an array of 192 rows of 172 bytes each (Figure 13). To each of the 172 columns 16 bytes of Parity of Outer Code are added, then, to each of the resulting 208 rows, 10 bytes of Parity of Inner Code are added. Thus a complete ECC Block comprises 208 rows of 182 bytes each. The bytes of this array are identified as $B_{i,j}$ as follows, where i is the row number and j is the column number.

$B_{i,j}$ for $i = 0$ to 191 and $j = 0$ to 171 are bytes from the Scrambled Frames

$B_{i,j}$ for $i = 192$ to 207 and $j = 0$ to 171 are bytes of the Parity of Outer Code

$B_{i,j}$ for $i = 0$ to 207 and $j = 172$ to 181 are bytes of the Parity of Inner Code

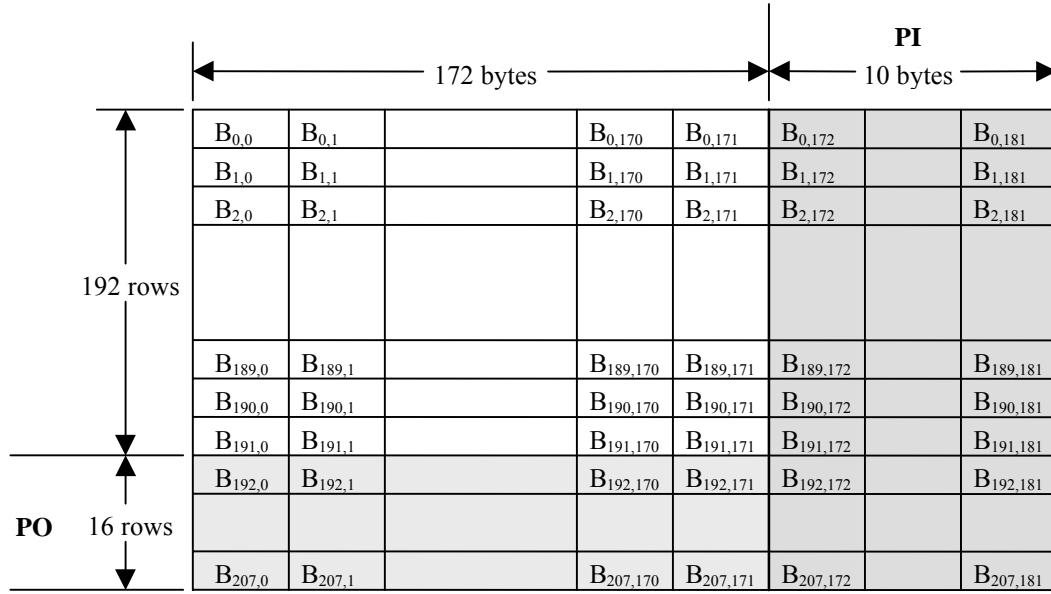


Figure 13 - ECC Block

The PO and PI bytes shall be obtained as follows.

In each of columns $j = 0$ to 171, the 16 PO bytes are defined by the remainder polynomial $R_j(x)$ to form the outer code RS (208,192,17).

$$R_j(x) = \sum_{i=192}^{207} B_{i,j} x^{207-i} = I_j(x) x^{16} \bmod G_{PO}(x)$$

where

$$I_j(x) = \sum_{i=0}^{191} B_{i,j} x^{191-i} \quad \text{and} \quad G_{PO}(x) = \prod_{k=0}^{15} (x + \alpha^k)$$

In each of rows $i = 0$ to 207, the 10 PI bytes are defined by the remainder polynomial $R_i(x)$ to form the inner code RS(182,172,11).

$$R_i(x) = \sum_{j=172}^{181} B_{i,j} x^{181-j} = I_i(x) x^{10} \bmod G_{PI}(x)$$

where

$$I_i(x) = \sum_{j=0}^{171} B_{i,j} x^{171-j} \quad \text{and} \quad G_{PI}(x) = \prod_{k=0}^9 (x + \alpha^k)$$

α is the primitive root of the primitive polynomial $P(x) = x^8 + x^4 + x^3 + x^2 + 1$

13.4 Recording Frames

Sixteen Recording Frames shall be obtained by interleaving one of the 16 PO rows at a time after every 12 rows of an ECC Block (Figure 14). This is achieved by re-locating the bytes $B_{i,j}$ of the ECC Block as $B_{m,n}$ for

$$m = i + \text{int}[i / 12] \quad \text{and} \quad n = j \quad \text{for } i \leq 191$$

$$m = 13 \times (i - 191) - 1 \quad \text{and} \quad n = j \quad \text{for } i \geq 192$$

where $\text{int}[x]$ represents the largest integer not greater than x .

Thus the 37 856 bytes of an ECC Block are re-arranged into 16 Recording Frames of 2 366 bytes. Each Recording Frame consists of an array of 13 rows of 182 bytes.

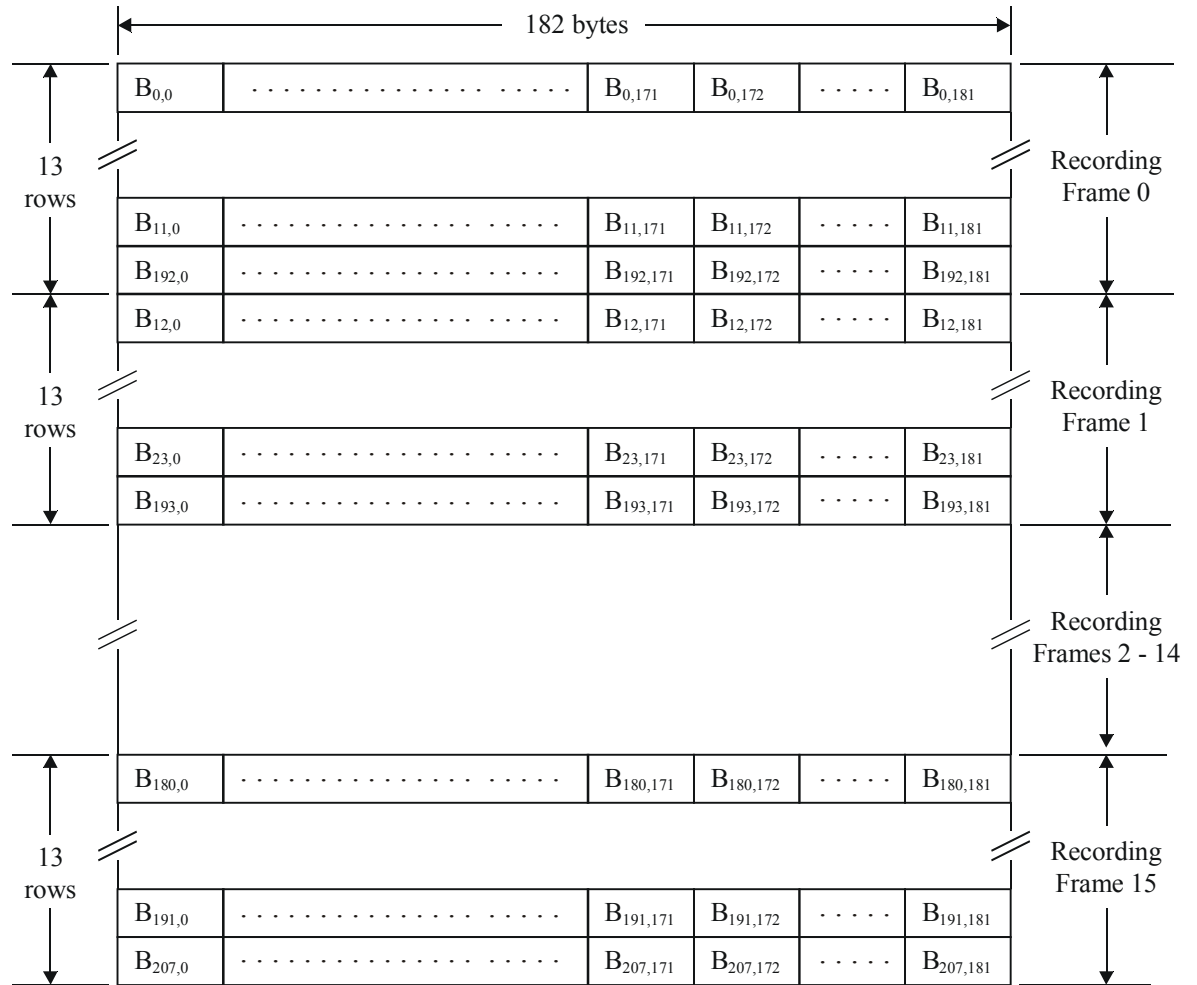


Figure 14 - Recording Frames obtained from an ECC Block

13.5 Modulation and NRZI conversion

The 8-bit bytes of each Recording Frame shall be transformed into 16-bit Code Words with the run length limitation that between 2 ONEs there shall be at least 2 ZEROs and at most 10 ZEROs (RLL(2,10)). Annex H specifies the conversion tables to be applied. The Main Conversion table and the Substitution table specify a 16-bit Code Word for each 256 8-bit bytes with one of 4 States. For each 8-bit byte, the tables indicate the corresponding Code Word, as well as the State for the next 8-bit byte to be encoded.

The 16-bit Code Words shall be NRZI-converted into Channel bits before recording on the disc (see Figure 15). The Channel clock period is the time between 2 consecutive Channel bits.

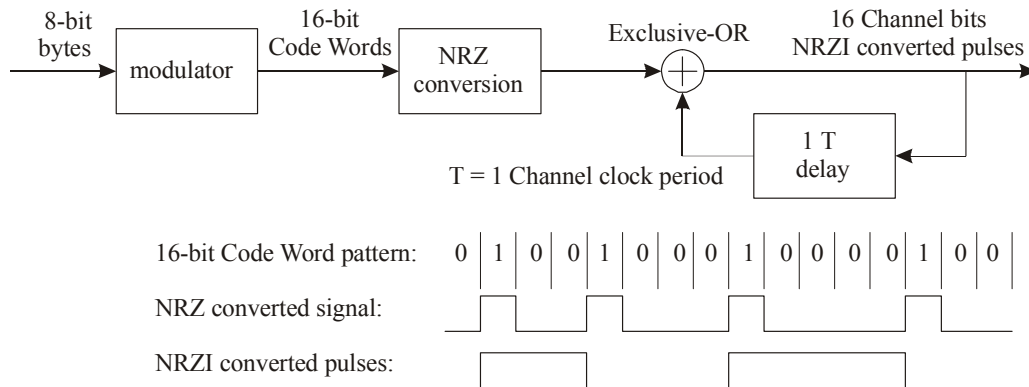


Figure 15 - NRZI conversion

13.6 Physical Sectors

The structure of a Physical Sector is shown in Figure 16. It shall consist of 13 rows, each comprising two Sync Frames. A Sync Frame shall consist of a SYNC Code from Table 2 and 1 456 Channel bits representing 91 8-bit bytes. Each row of the Physical Sector shall consist of two Sync Frames with the first 1 456 Channel bits representing the first 91 bytes of each row of a Recording Frame and the second 1 456 Channel bits representing the second 91 bytes of each row of a Recording Frame.

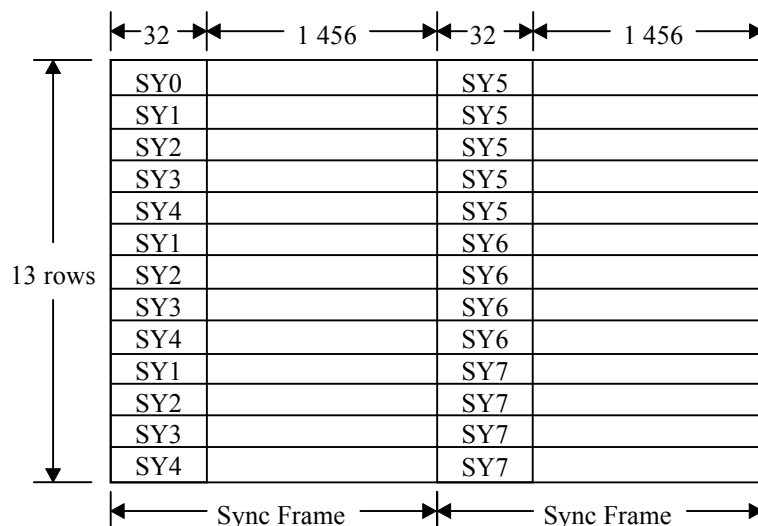


Figure 16 - Physical Sector

Recording of the Physical Sector shall start with the first Sync Frame of the first row, followed by the second Sync Frame of that row, and so on, row-by-row. The state of each SYNC Code and each subsequent set of 16 Channel bits shall follow the rules defined in 13.8.

Table 2 - SYNC Codes

State 1 and State 2 (next state is state 1)			
Primary SYNC codes		Secondary SYNC codes	
(msb)	(lsb)	(msb)	(lsb)
SY0 = 0001001001000100 0000000000010001 / 0001001000000100 0000000000010001			
SY1 = 0000010000000100 0000000000010001 / 0000010001000100 0000000000010001			
SY2 = 0001000000000100 0000000000010001 / 0001000001000100 0000000000010001			
SY3 = 0000100000000100 0000000000010001 / 0000100001000100 0000000000010001			
SY4 = 0010000000000100 0000000000010001 / 0010000001000100 0000000000010001			
SY5 = 0010001001000100 0000000000010001 / 0010001000000100 0000000000010001			
SY6 = 0010010010000100 0000000000010001 / 0010000010000100 0000000000010001			
SY7 = 0010010001000100 0000000000010001 / 0010010000000100 0000000000010001			
State 3 and State 4 (next state is state 1)			
Primary SYNC codes		Secondary SYNC codes	
(msb)	(lsb)	(msb)	(lsb)
SY0 = 1001001000000100 0000000000010001 / 1001001001000100 0000000000010001			
SY1 = 1000010001000100 0000000000010001 / 1000010000000100 0000000000010001			
SY2 = 1001000001000100 0000000000010001 / 1001000000000100 0000000000010001			
SY3 = 1000001001000100 0000000000010001 / 1000001000000100 0000000000010001			
SY4 = 1000100001000100 0000000000010001 / 1000100000000100 0000000000010001			
SY5 = 1000100100000100 0000000000010001 / 1000000100000100 0000000000010001			
SY6 = 1001000010000100 0000000000010001 / 1000000001000100 0000000000010001			
SY7 = 1000100010000100 0000000000010001 / 1000000001000100 0000000000010001			

13.7 Layout of a Recording Unit (RUN)

A RUN shall consist of an integer number ($M \geq 1$) of sets of 16 Physical Sectors, each from a single ECC Block. The M ECC Blocks shall be preceded by 8 Channel bits, which are meant to reduce possible influences of inaccuracies of the linking point, while the last 8 Channel bits of the last Physical Sector shall be discarded at recording. The 8 linking Channel bits and the next SYNC Code SY0 (chosen from State 1/2 or State 3/4) shall be chosen randomly, such that the runlength constraints specified in 13.5 are fulfilled.

Each RUN of M ECC Blocks ($M \geq 1$) starting with ECC Block N shall be recorded in the following way:

- 8 Channel bits for linking in ECC Block $N-1$,
- full ECC Blocks N to $N + M - 2$ (if $M \geq 2$),
- ECC Block $N + M - 1$, except for the last 8 Channel bits, which bits shall not be recorded.

The positioning of a Recording Unit is shown in Figure 17.

When the RUN starting with ECC Block N is to be recorded, and ECC Block $N-1$ has not yet been recorded, then the RUN shall be extended with a dummy ECC Block $N-1$ of which all Main Data bytes shall be set to (00) (see also clause 23: Sequential recording).

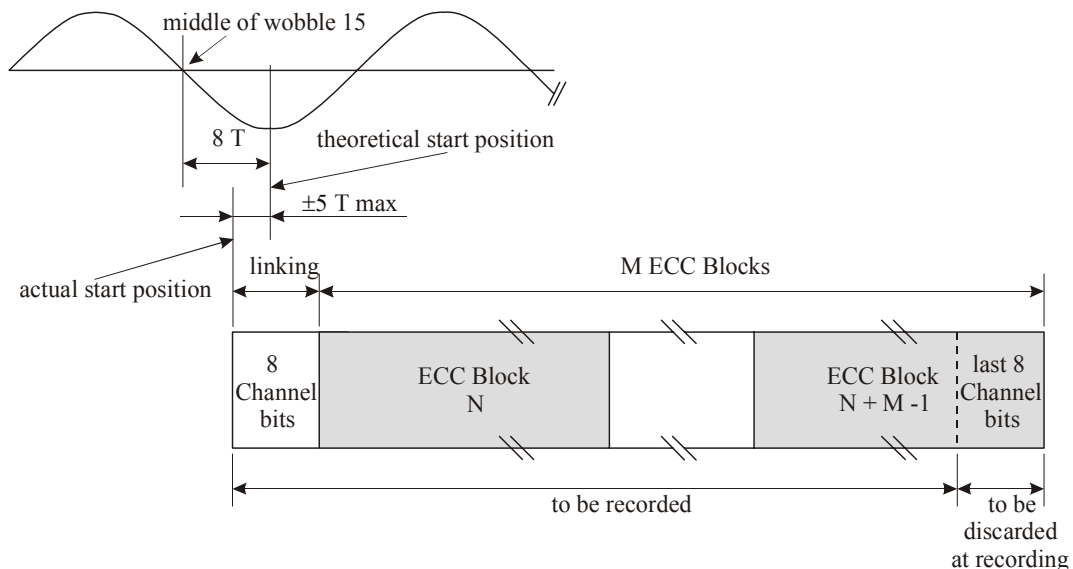


Figure 17 - Recording Unit

13.7.1 Recording Unit position

Each ECC Block, consisting of 16 Physical Sectors, shall correspond to 4 ADIP words (see 14.4.1.1).

RUNs shall be mapped onto the structure of tracks (see 14.4), such that the Physical Sector Numbers (PSN), of which the 2 least significant bits have been discarded, correspond to the local Physical Address in ADIP (PAA). In mathematical form: $PSN = 4 \times PAA + i$, where $i = 0, 1, 2$, or 3

(for example: Physical Sector Numbers (030000) to (030003) correspond to Physical ADIP Address (00C000)).

The reference for the theoretical start positions is wobble 15 following the ADIP word sync unit of the ADIP words of which the 2 least significant address bits are 00 (see 14.4.1.1 and Figure 21).

The theoretical start position is 8 Channel bits after the nominal position of the zero crossing in the middle of the above mentioned wobble 15 of the wobble signal from Read channel 2.

The start of each recording shall be within ± 5 Channel bits of the theoretical start position.

During writing the Channel bit clock shall be phase locked to the wobble frequency.

13.8 d.c. component suppression control

To ensure a reliable radial tracking and a reliable detection of the HF signals, the low frequency content of the stream of Channel bit patterns should be kept as low as possible. In order to achieve this, the Digital Sum Value (DSV, see 4.3) shall be kept as close to zero as possible. At the beginning of the modulation, the DSV shall be set to 0.

The different ways of diminishing the current value of the DSV are as follows:

- a) Choice of SYNC Codes between Primary or Secondary SYNC Codes.
- b) For the 8-bit bytes in the range 0 to 87, the Substitution table offers an alternative 16-bit Code Word for all States.
- c) For the 8-bit bytes in the range 88 to 255, when the prescribed State is 1 or 4, then the 16-bit Code Word can be chosen either from State 1 or from State 4, so as to ensure that the RLL requirement is met.

In order to use these possibilities, two data streams, Stream 1 and Stream 2, are generated. Stream 1 shall start with the Primary SYNC Code and Stream 2 with the Secondary SYNC Code of the same category of SYNC Codes. As both streams are modulated individually, they generate a different DSV because of the difference between the bit patterns of the Primary and Secondary SYNC Codes.

In the cases b) and c), there are two possibilities to represent a 8-bit byte. The DSV of each stream is computed up to the 8-bit byte preceding the 8-bit byte for which there is this choice. The stream with the lowest $|DSV|$ is selected and duplicated to the other stream. Then, one of the representations of the next 8-bit byte is entered into Stream 1 and the other into Stream 2. This operation is repeated each time case b) or c) occurs.

Whilst case b) always occurs at the same pattern position in both streams, case c) may occur in one of the streams and not in the other because, for instance, the next State prescribed by the previous 8-bit byte can be 2 or 3 instead of 1 or 4. In that case the following 3-step procedure shall be applied:

- 1) Compare the $|DSV|$ s of both streams.
- 2) If the $|DSV|$ of the stream in which case c) occurs is smaller than that of the other stream, then the stream in which case c) has occurred is chosen and duplicated to the other stream. One of the representations of the next 8-bit byte is entered into this stream and the other into the other stream.
- 3) If the $|DSV|$ of the stream in which case c) has occurred is larger than that of the other stream, then case c) is ignored and the 8-bit byte is represented according to the prescribed State.

In both cases b) and c), if the $|DSV|$ s are equal, the decision to choose Stream 1 or Stream 2 is implementation-defined.

The procedure for case a) shall be as follows:

- 1) At the end of each Sync Frame, whether or not case b) and or case c) have occurred, the accumulated DSVs of both streams are compared. The stream with the lower $|DSV|$ is selected and duplicated to the other stream. Then the next Primary SYNC Code and the Secondary SYNC Code of the proper category are inserted each in one of the streams.

Optionally the procedure for case a) can be extended in the following way:

- 2) If the DSV at the end of the resulting Sync Frame is greater than + 63 or smaller than -64, then the SYNC Code at the beginning of the Sync Frame is changed from Primary to Secondary or vice versa. If this yields a smaller $|DSV|$, the change is permanent, if the $|DSV|$ is not smaller, the original SYNC Code is retained.

During the DSV computation, the actual values of the DSV may vary between -1 000 and +1 000, thus it is recommended that the count range for the DSV be at least from -1 024 to +1 023.

14 Track format

14.1 Track shape

The area in the Information Zone (see 10.7) shall contain tracks formed from a single spiral groove. Each track shall form a 360° turn of a continuous spiral. The shape of each track is determined by the requirements in Section 5. Recordings shall be made on the groove.

The tracks in the Information Zone contain a phase modulated sinusoidal deviation from the nominal centrelines, called wobble, which contains addressing information.

The tracks shall be continuous in the Information Zone. The groove tracks shall start at a radius of
22,00 mm max.
and end at a radius of
58,75 mm min (for 80 mm disc see Annex A).

14.2 Track path

The track path shall be a continuous spiral from the inside (beginning of the Lead-in Zone) to the outside (end of the Lead-out Zone) when the disc rotates counter-clockwise as viewed from the optical head.

14.3 Track pitch

The track pitch is the distance measured between the average track centrelines of adjacent tracks, measured in the radial direction. The track pitch shall be $0,74 \mu\text{m} \pm 0,03 \mu\text{m}$. The track pitch averaged over the Information Zone shall be $0,74 \mu\text{m} \pm 0,01 \mu\text{m}$.

14.4 Track layout

The wobble of the tracks is a sinusoidal deviation from the nominal centrelines, with a wavelength of $4,265 6 \mu\text{m} \pm 0,045 0 \mu\text{m}$ (equivalent to 32 Channel bits). The Total Harmonic Distortion (THD) of the oscillator for generating the wobble sine wave shall be $\leq -40 \text{ dB}$.

The wobble is phase modulated by inverting wobble cycles. The information contained in the wobble modulation is called Address-in-Pregroove or ADIP (see 14.4.1.1).

14.4.1 ADIP information

The data to be recorded onto the disc must be aligned with the ADIP information modulated in the wobble. Therefore 93 wobbles shall correspond to 2 Sync Frames. Of each 93 wobbles, 8 wobbles are phase modulated with ADIP information (see Figure 18).

1 wobble equals 32 Channel bits (= 32T)
one ADIP unit = 8 modulated wobbles per 2 Sync Frames

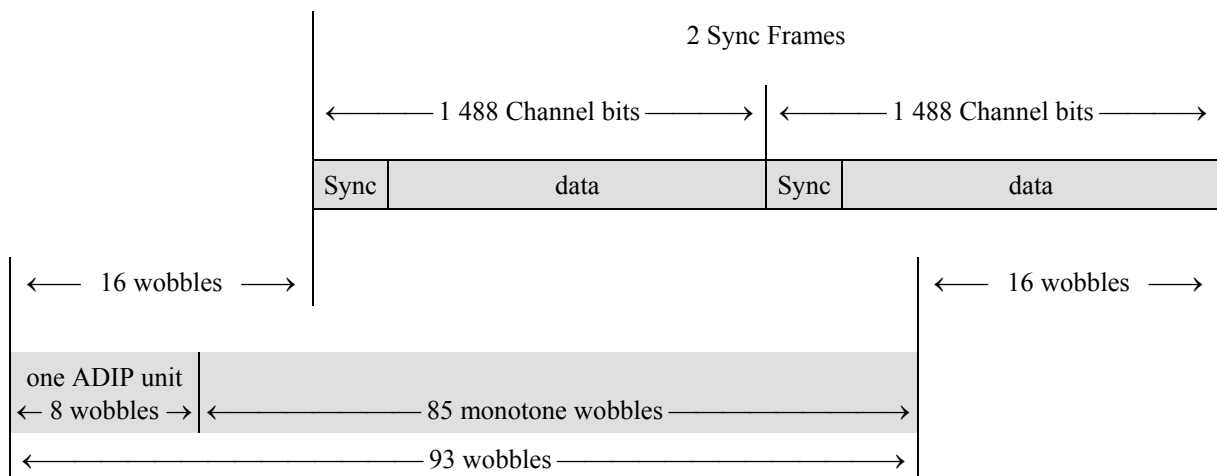


Figure 18 – General ADIP structure

14.4.1.1 ADIP word structure

52 ADIP units are grouped into one ADIP word each.

This means that one ADIP word corresponds to $4 \times 13 \times 2$ Sync Frames \equiv 4 Physical Sectors.

Each ADIP word shall consist of: 1 ADIP sync unit + 51 ADIP data units.

ADIP sync unit = 4 inverted wobbles for word sync + 4 monotone wobbles.

ADIP data unit = 1 inverted wobble for bit sync + 3 monotone wobbles + 4 wobbles representing one data bit.
(see 14.4.1.3)

ADIP word structure:

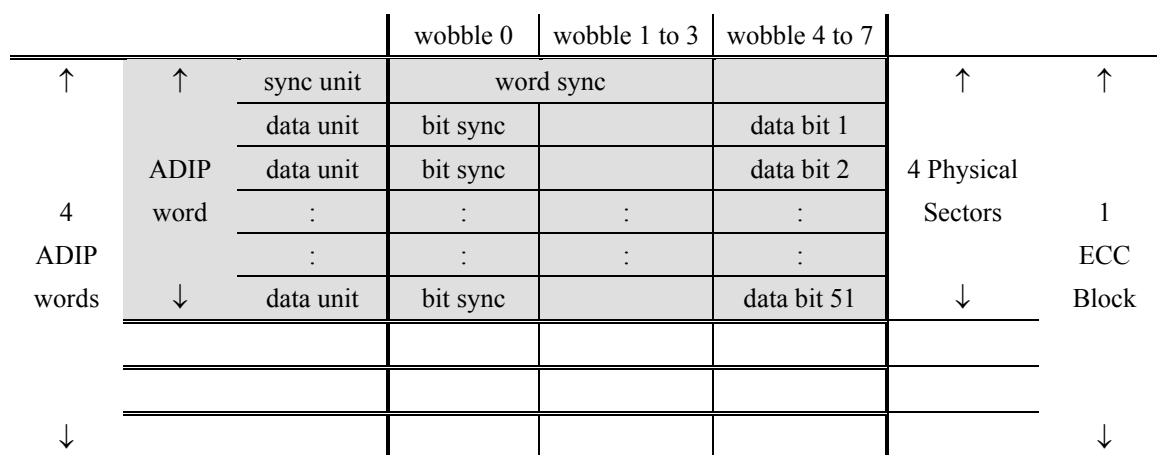


Figure 19 - ADIP word structure

The information contained in the data bits is as follows:

bit 1: this bit is **reserved** and shall be set to ZERO.

bits 2 to 23: these 22 bits contain a **Physical ADIP Address**.
Data bit 2 is the msb and data bit 23 is the lsb. The addresses increase by one for each next ADIP word.

The first address in the Information Zone shall be such that Physical ADIP Address (00C000) is located at radius $24,00^{+0,00}_{-0,20}$ mm .

Physical ADIP Address (098150), which is the first address corresponding to the Lead-out Zone, shall be located at a radius $\leq 58,00$ mm (for 80 mm disc see Annex A).

bits 24 to 31: these 8 bits contain **auxiliary information** about the disc.
Bit 24 to 31 from 256 consecutive ADIP words, shall form one ADIP Aux Frame with 256 bytes of information. The first byte of each ADIP Aux Frame shall be located in an ADIP word with a Physical ADIP Address that is a multiple of 256 (Physical ADIP Address = (xxxx00)).

In the Lead-in Zone and the Inner Drive Area of the disc the auxiliary bytes shall be used for storing Physical format information. The contents of the 256 bytes are defined in Table 3 and 14.4.2.

In the Data Zone of the disc the auxiliary bytes may be used for storing Extended format information as defined in Annex B. If not used for such purpose all bytes shall be set to (00).

In the Lead-out Zone / Outer Drive Area of the disc the auxiliary bytes shall be set to (00).

bits 32 to 51: these 20 bits contain **error correction parities** for the ADIP information (see 14.4.1.2).

14.4.1.2 ADIP error correction

For the ADIP error correction the ADIP data bits are grouped into 4-bit nibbles.

The mapping of the data bits into the nibble array is defined in Figure 20. Bit 0 is a dummy bit, which shall be considered as set to ZERO for the error corrector.

nibble N ₀	bit 0	bit 1	bit 2	bit 3	<div> <div>↑</div> <div>6 nibbles</div> <div>ADIP address</div> <div>↓</div> </div>
nibble N ₁	bit 4	bit 5	:	:	
:	:	:	:	:	
:	bit 20	:	:	bit 23	
:	bit 24				<div> <div>↑ 2</div> <div>nibbles</div> <div>AUX data</div> <div>↓</div> </div>
nibble N ₇	bit 28		:	bit 31	
nibble N ₈	bit 32	:	:	:	<div> <div>↑</div> <div>5 nibbles</div> <div>nibble based R-S ECC</div> <div>↓</div> </div>
:	:	:	:	:	
:	:	:	:	:	
:	:	:	:	:	
nibble N ₁₂	bit 48	bit 49	bit 50	bit 51	

Figure 20 - ADIP error correction structure

A nibble-based RS (13,8,6) code is constructed, of which the 5 parity nibbles N₈ to N₁₂, are defined by the remainder polynomial R(x):

$$R(x) = \sum_{i=8}^{12} N_i x^{12-i} = I(x) x^5 \bmod G_{PA}(x)$$

where

$$I(x) = \sum_{i=0}^7 N_i x^{7-i} \quad \text{and} \quad G_{PA}(x) = \prod_{k=0}^4 (x + \alpha^k)$$

α is the primitive root 0010 of the primitive polynomial $P(x) = x^4 + x + 1$


All bits of the 5 parity nibbles N₈ to N₁₂ shall be inverted before recording.

14.4.1.3 ADIP modulation rules


The ADIP units are modulated by inverting some of the 8 wobble cycles:

- PW is a positive wobble, which shall start moving towards the inside of the disc.
- NW is a negative wobble, which shall start moving towards the outside of the disc.
- all monotone wobbles shall be PWs.

Modulation of the ADIP word sync:

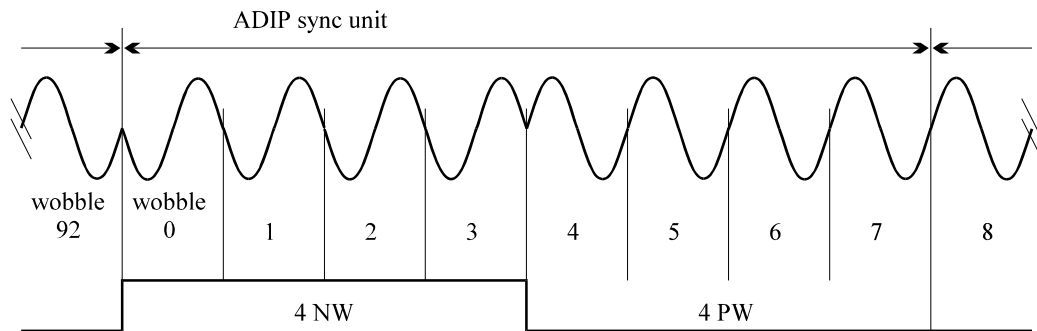

Modulation of an ADIP ZERO bit:

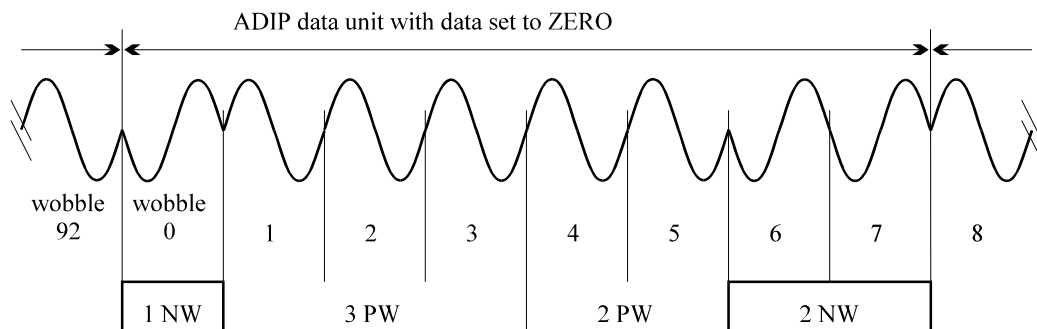

Modulation of an ADIP ONE bit:

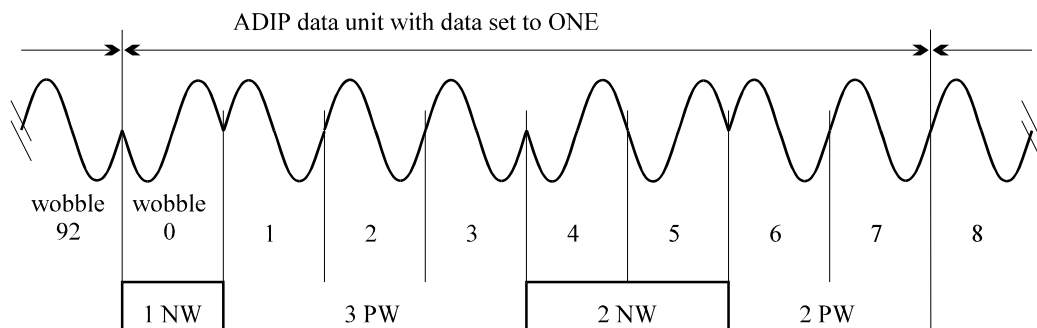


Figure 21 - ADIP modulation rules

14.4.2 Physical format information in ADIP

This information shall comprise the 256 bytes shown in Table 3. It contains disc information and values for the write strategy parameters to be used with the Optimum Power Control (OPC) algorithm to determine optimum laser power levels for writing (see Annex G and Annex I). The information is copied to the Control Data Zone (see 18.8.1) during finalization of the Lead-in Zone of the disc.

Table 3 - Physical format information

Byte number	Content	Number of bytes
0	Disc Category and Version Number	1
1	Disc size	1
2	Disc structure	1
3	Recording density	1
4 to 15	Data Zone allocation	12
16	General Flag bits	1
17	Disc Application Code	1
18	Extended Information indicators	1
19 to 26	Disc Manufacturer ID	8
27 to 29	Media Type ID	3
30	Product revision number	1
31	number of Physical format information bytes in use in ADIP up to byte 63	1
32	Primary recording velocity for the basic write strategy	1
33	Upper recording velocity for the basic write strategy	1
34	Wavelength λ_{IND}	1
35	normalized Write power dependency on Wavelength $(dP/d\lambda)/(P_{IND}/\lambda_{IND})$	1
36	Maximum read power at Primary velocity	1
37	P_{IND} at Primary velocity	1
38	β_{target} at Primary velocity	1
39	Maximum read power at Upper velocity	1
40	P_{IND} at Upper velocity	1
41	β_{target} at Upper velocity	1
42	$T_{top} (\geq 4T)$ first pulse duration for $cm^* \geq 4T$ at Primary velocity	1
43	$T_{top} (=3T)$ first pulse duration for $cm^* = 3T$ at Primary velocity	1
44	T_{mp} multi pulse duration at Primary velocity	1
45	T_{lp} last pulse duration at Primary velocity	1
46	$dT_{top} (\geq 4T)$ first pulse lead time for $cm^* \geq 4T$ at Primary velocity	1
47	$dT_{top} (=3T)$ first pulse lead time for $cm^* = 3T$ at Primary velocity	1
48	dT_{le} first pulse leading edge shift for $ps = 3T$ at Primary velocity	1
49	$T_{top} (\geq 4T)$ first pulse duration for $cm^* \geq 4T$ at Upper velocity	1
50	$T_{top} (=3T)$ first pulse duration for $cm^* = 3T$ at Upper velocity	1
51	T_{mp} multi pulse duration at Upper velocity	1

* cm = current mark , ps = previous space (see also Annex G)

Byte number	Content	Number of bytes
52	T_{lp} last pulse duration at Upper velocity	1
53	$dT_{top} (\geq 4T)$ first pulse lead time for $cm^* \geq 4T$ at Upper velocity	1
54	$dT_{top} (=3T)$ first pulse lead time for $cm^* = 3T$ at Upper velocity	1
55	dT_{le} first pulse leading edge shift for $ps^* = 3T$ at Upper velocity	1
56 to 63	Reserved - All (00)	8
64 to 95	Extended Information block 0	32
96 to 127	Extended Information block 1	32
128 to 159	Extended Information block 2	32
160 to 191	Extended Information block 3	32
192 to 223	Extended Information block 4	32
224 to 247	Extended Information block 5	24
248 to 255	Reserved for use in the Control Data Zone – All (00)	8

This version of this document specifies several types of discs, with different recording velocity ranges. The specific write parameters for each recording velocity range shall be specified in separate blocks (EI blocks, see 14.4.2.3). The following types of discs (characterized by the so-called X-speed) have now been defined and their ADIP shall contain the EI Blocks as indicated in the Table 4.

Table 4 - Types of discs

type of disc	basic write strategy bytes 32 to 63 (1x & 2,4x speed)	4x+ write strategy EI block Format 1 (4x speed)	6x+ write strategy EI block Format 2 (6x ~ 8x speed)	6x+ write strategy EI block Format 3 (6x ~ 16x speed)	remarks
“2,4x”	+	—	—	—	this disc shall be suited for recording speeds of 3,49 & 8,44 m/s only
“4x”	+	+	—	—	this disc shall be suited for recording speeds of 3,49 & 8,44 m/s and 13,95 m/s
“8x”	+	+	+	—	this disc shall be suited for recording speeds of 3,49 & 8,44 m/s, 13,95 m/s and 20,9 ~ 27,9 m/s
“16x”	+	+	+	+	this disc shall be suited for recording speeds of 3,49 & 8,44 m/s, 13,95 m/s and 20,9 ~ 55,8 m/s

+ shall be present — shall not be used

14.4.2.1 General information - Bytes 0 to 31

Byte 0 - Disc Category and Version Number

- Bits b_7 to b_4 shall specify the Disc Category,
bit b_7 shall be set to 1 indicating a disc according to the DVD+R/+RW Format (see clause 3),
bit b_6 shall be set to 0 indicating a single layer disc,
bits b_5 and b_4 shall be set to 10 indicating a DVD+R disc.
- Bits b_3 to b_0 shall specify the Version Number,
they shall be set to 0001 indicating this System Description.
This Version Number identifies amongst others the definitions of the data in bytes 32 to 63.
Drives not acquainted with the specific Version Number of a disc should not try to record on that disc using the information in bytes 32 to 63, which bytes contain the basic write strategy parameters (see Annex P).

Note: Version number 0000 can be used for identification of test discs. Such test discs might not contain the correct Physical format information in their ADIP Aux Frames.

Byte 1 - Disc size and maximum transfer rate

- Bits b_7 to b_4 shall specify the disc size,
they shall be set to 0000, indicating a 120 mm disc (for 80 mm disc see Annex A)
- Bits b_3 to b_0 shall specify the maximum read transfer rate,
they shall be set to 1111 indicating no maximum read transfer rate is specified

Byte 2 - Disc structure

- Bits b_7 to b_4 shall be set to 0000
- Bits b_3 to b_0 shall specify the type of the recording layer(s):
they shall be set to 0010, indicating a write-once recording layer.

Byte 3 - Recording density

- Bits b_7 to b_4 shall specify the average Channel bit length in the Information Zone,
they shall be set to 0000, indicating 0,133 μm
- Bits b_3 to b_0 shall specify the average track pitch,
they shall be set to 0000, indicating an average track pitch of 0,74 μm

Bytes 4 to 15 - Data Zone allocation

- Byte 4 shall be set to (00).
- Bytes 5 to 7 shall be set to (030000) to specify PSN 196 608 of the first Physical Sector of the Data Zone
- Byte 8 shall be set to (00).
- Bytes 9 to 11 shall be set to (26053F) to specify PSN 2 491 711 as the last possible Physical Sector of the Data Zone (for 80 mm disc see Annex A).
- Bytes 12 to 15 shall be set to (00)

Byte 16 – General Flag bits

- Bit b_7 shall be set to ZERO
- Bit b_6 shall specify if the disc contains Extended format information in the ADIP Aux Frames in the Data Zone related to the VCPS copy protection system,
shall be set to 0, indicating no Extended format information for VCPS is present,
shall be set to 1, indicating the Data Zone contains Extended format information for VCPS as defined in Annex B and the VCPS System Description (see clause 3).
- Bit b_5 is reserved for use in the Control Data Zone and shall be set to ZERO
- Bits b_4 to b_0 are reserved and shall be set to 0 0000

Byte 17 – Disc Application Code

This byte can identify discs that are restricted to be used for special applications only. Drives not able to identify the particular application related to a specific Disc Application Code or not able to act according to the rules as defined for this particular application are not allowed to write on a disc with such a code.

- (00) identifies a disc for General Purpose use
(no restrictions, all drives are allowed to write on a disc carrying this code),
all other codes are reserved and shall be registered before use.

Registration of Disc Application Codes shall be requested from Royal Philips Electronics.
(for detailed address information see backside of inner title page of this document)

Byte 18 – Extended Information indicators

Bits b_7 to b_6 are reserved and shall be set to 00

Bits b_5 to b_0 each of these bits shall indicate the presence of an Extended Information block.
Bit b_i shall be set to 1 if Extended Information block i , consisting of bytes $(64 + i \times 32)$ to $(95 + i \times 32)$, is in use. Else bit b_i shall be set to 0.

Bytes 19 to 26 – Disc Manufacturer ID

These 8 bytes shall identify the manufacturer of the disc. This name shall be represented by characters from the G0 set + SPACE according to ECMA-43. Trailing bytes not used shall be set to (00).

If the Disc Manufacturer ID is not used these 8 bytes shall be set to (00)

Bytes 27 to 29 – Media Type ID

Disc manufacturers can have different types of media, which shall be specified by these 3 bytes. The specific type of disc is denoted in this field by characters from the G0 set + SPACE according to ECMA-43. Trailing bytes not used shall be set to (00).

If the Media Type ID is not used these 3 bytes shall be set to (00)

Note: Discs with different characteristics shall be identified by different and unique combinations of Disc Manufacturer ID / Media Type ID. Therefore the content of bytes 19 to 29 shall be approved by the licensors of the DVD+R system.

Byte 30 – Product revision number

This byte shall identify the product revision number in binary notation. All discs with the same Disc Manufacturer ID and the same Media Type ID, regardless of Product revision numbers, must have the same recording properties (only minor differences are allowed: Product revision numbers shall be irrelevant for recorders). The content of this byte can be chosen freely by the disc manufacturer.

If not used this byte shall be set to (00)

Byte 31 – number of Physical format information bytes in use in ADIP up to byte 63

This byte forms one 8-bit binary number indicating the number of bytes actually in use for the basic Physical format information (in bytes 0 to 63). It shall be set to (38) indicating that only the first 56 bytes of the Physical format information are used.

14.4.2.2 Basic write strategy parameters - Bytes 32 to 63

Byte 32 – Primary recording velocity for the basic write strategy

This byte indicates the lowest recording velocity of the disc for the parameters as defined in bytes 34 to 63 in this Physical format information. This recording velocity is equal to the Reference velocity and shall be specified as a number n such that

$$n = 10 \times v_{\text{Primary,basic}} \text{ (} n \text{ rounded off to an integral value)}$$

It shall be

set to (23) indicating a Primary writing speed of about 3,49 m/s (1x).

Byte 33 – Upper recording velocity for the basic write strategy

This byte indicates the highest recording velocity of the disc for the parameters as defined in bytes 34 to 63 in this Physical format information. This recording velocity shall be specified as a number n such that

$$n = 10 \times v_{\text{Upper,basic}} \text{ (} n \text{ rounded off to an integral value)}$$

It shall be

set to (54) indicating a Upper writing speed of about 8,44 m/s (2,4x).

Byte 34 – Wavelength λ_{IND}

This byte shall specify the laser wavelength in nanometers at which the optimum write parameters in the following bytes are specified, as a number n such that

$$n = \text{Wavelength} - 600$$

For this version of the DVD+R system, n shall be equal to (37) indicating that λ_{IND} is 655 nanometers.

Byte 35 – Normalized Write power dependency on Wavelength

This byte shall specify the average write power dependency on the wavelength normalized by the ratio of P_{IND} and λ_{IND} (see 29.3.3 and Annex K), as a number n such that

$$n = (dP/d\lambda)/(P_{\text{IND}}/\lambda_{\text{IND}})$$

Byte 36 - Maximum read power, P_r at Primary velocity

This byte shall specify the maximum read power P_r in milliwatts at Primary velocity as a number n such that

$$n = 20 \times (P_r - 0,7)$$

Byte 37 - P_{IND} at Primary velocity

P_{IND} is the starting value for the determination of P_{wo} used in the OPC algorithm, see Annex I and Annex K. This byte shall specify the indicative value P_{IND} of P_{wo} in milliwatts at Primary velocity and λ_{IND} as a number n such that

$$n = 20 \times (P_{\text{IND}} - 5)$$

Byte 38 - β_{target} at Primary velocity

This byte shall specify the target value for β , β_{target} at Primary velocity used in the OPC algorithm (see Annex I) as a number n such that

$$n = 100 \times (\beta_{\text{target}} + 1)$$

Byte 39 - Maximum read power, P_r at Upper velocity

This byte shall specify the maximum read power P_r in milliwatts at Upper velocity as a number n such that

$$n = 20 \times (P_r - 0,7)$$

Byte 40 - P_{IND} at Upper velocity

P_{IND} is the starting value for the determination of P_{wo} used in the OPC algorithm, see Annex I and Annex K. This byte shall specify the indicative value P_{IND} of P_{wo} in milliwatts at Upper velocity and λ_{IND} as a number n such that

$$n = 20 \times (P_{\text{IND}} - 5)$$

Byte 41 - β_{target} at Upper velocity

This byte shall specify the target value for β , β_{target} at Upper velocity used in the OPC algorithm (see Annex I) as a number n such that

$$n = 100 \times (\beta_{\text{target}} + 1)$$

Byte 42 – T_{top} ($\geq 4T$) first pulse duration for current mark $\geq 4T$ at Primary velocity

This byte shall specify the duration of the first pulse of the multi pulse train when the current mark is a 4T or greater mark for recording at Primary velocity (see Annex G.1). The value is expressed in fractions of the Channel bit clock period as a number n such that

$$n = 16 \times \frac{T_{top}}{T_W} \quad \text{and} \quad 4 \leq n \leq 40$$

Byte 43 – T_{top} ($=3T$) first pulse duration for current mark $=3T$ at Primary velocity

This byte shall specify the duration of the first pulse of the multi pulse train when the current mark is a 3T mark for recording at Primary velocity (see Annex G.1). The value is expressed in fractions of the Channel bit clock period as a number n such that

$$n = 16 \times \frac{T_{top}}{T_W} \quad \text{and} \quad 4 \leq n \leq 40$$

Byte 44 – T_{mp} multi pulse duration at Primary velocity

This byte shall specify the duration of the 2nd pulse through the 2nd to last pulse of the multi pulse train for recording at Primary velocity (see Annex G.1). The value is expressed in fractions of the Channel bit clock period as a number n such that

$$n = 16 \times \frac{T_{mp}}{T_W} \quad \text{and} \quad 4 \leq n \leq 14$$

Byte 45 – T_{lp} last pulse duration at Primary velocity

This byte shall specify the duration of the last pulse of the multi pulse train when the current mark is a 4T or greater mark for recording at Primary velocity (see Annex G.1). The value is expressed in fractions of the Channel bit clock period as a number n such that

$$n = 16 \times \frac{T_{lp}}{T_W} \quad \text{and} \quad 4 \leq n \leq 24$$

Byte 46 – dT_{top} ($\geq 4T$) first pulse lead time for current mark $\geq 4T$ at Primary velocity

When the current mark is a 4T or greater mark, this byte shall specify the lead time of the first pulse of the multi pulse train relative to the trailing edge of the second Channel bit of the data pulse, for recording at Primary velocity (see Annex G.1). The value is expressed in fractions of the Channel bit clock period as a number n such that

$$n = 16 \times \frac{dT_{top}}{T_W} \quad \text{and} \quad 0 \leq n \leq 24$$

Byte 47 – dT_{top} ($=3T$) first pulse lead time for current mark $=3T$ at Primary velocity

When the current mark is a 3T mark, this byte shall specify the lead time of the first pulse of the multi pulse train relative to the trailing edge of the second Channel bit of the data pulse, for recording at Primary velocity (see Annex G.1). The value is expressed in fractions of the Channel bit clock period as a number n such that

$$n = 16 \times \frac{dT_{top}}{T_W} \quad \text{and} \quad 0 \leq n \leq 24$$

Byte 48 – dT_{le} first pulse leading edge shift for previous space $=3T$ at Primary velocity

This byte shall specify the leading edge shift for the 1st pulse of the multi pulse train when the previous space was a 3T space for recording at Primary velocity (see Annex G.1). The value is expressed in fractions of the Channel bit clock period as a number n such that

$$n = 16 \times \frac{dT_{le}}{T_W} \quad \text{and} \quad 0 \leq n \leq 4$$

Byte 49 – T_{top} ($\geq 4T$) first pulse duration for current mark $\geq 4T$ at Upper velocity

This byte shall specify the duration of the first pulse of the multi pulse train when the current mark is a 4T or greater mark for recording at Upper velocity (see Annex G.1). The value is expressed in fractions of the Channel bit clock period as a number n such that

$$n = 16 \times \frac{T_{top}}{T_W} \quad \text{and} \quad 4 \leq n \leq 40$$

Byte 50 – T_{top} (3) first pulse duration for current mark =3T at Upper velocity

This byte shall specify the duration of the first pulse of the multi pulse train when the current mark is a 3T mark for recording at Upper velocity (see Annex G.1). The value is expressed in fractions of the Channel bit clock period as a number n such that

$$n = 16 \times \frac{T_{top}}{T_W} \quad \text{and} \quad 4 \leq n \leq 40$$

Byte 51 – T_{mp} multi pulse duration at Upper velocity

This byte shall specify the duration of the 2nd pulse through the 2nd to last pulse of the multi pulse train for recording at Upper velocity (see Annex G.1). The value is expressed in fractions of the Channel bit clock period as a number n such that

$$n = 16 \times \frac{T_{mp}}{T_W} \quad \text{and} \quad 4 \leq n \leq 14$$

Byte 52 – T_{lp} last pulse duration at Upper velocity

This byte shall specify the duration of the last pulse of the multi pulse train when the current mark is a 4T or greater mark for recording at Upper velocity (see Annex G.1). The value is expressed in fractions of the Channel bit clock period as a number n such that

$$n = 16 \times \frac{T_{lp}}{T_W} \quad \text{and} \quad 4 \leq n \leq 24$$

Byte 53 – dT_{top} ($\geq 4T$) first pulse lead time for current mark $\geq 4T$ at Upper velocity

When the current mark is a 4T or greater mark, this byte shall specify the lead time of the first pulse of the multi pulse train relative to the trailing edge of the second Channel bit of the data pulse, for recording at Upper velocity (see Annex G.1). The value is expressed in fractions of the Channel bit clock period as a number n such that

$$n = 16 \times \frac{dT_{top}}{T_W} \quad \text{and} \quad 0 \leq n \leq 24$$

Byte 54 – dT_{top} (=3T) first pulse lead time for current mark =3T at Upper velocity

When the current mark is a 3T mark, this byte shall specify the lead time of the first pulse of the multi pulse train relative to the trailing edge of the second Channel bit of the data pulse, for recording at Upper velocity (see Annex G.1). The value is expressed in fractions of the Channel bit clock period as a number n such that

$$n = 16 \times \frac{dT_{top}}{T_W} \quad \text{and} \quad 0 \leq n \leq 24$$

Byte 55 – dT_{le} first pulse leading edge shift for previous space =3T at Upper velocity

This byte shall specify the leading edge shift for the 1st pulse of the multi pulse train when the previous space was a 3T space for recording at Upper velocity (see Annex G.1). The value is expressed in fractions of the Channel bit clock period as a number n such that

$$n = 16 \times \frac{dT_{le}}{T_W} \quad \text{and} \quad 0 \leq n \leq 4$$

Bytes 56 to 63 - Reserved - All (00)

These bytes shall be set to all (00).

14.4.2.3 Extended Information blocks - Bytes $(64 + i \times 32)$ to $(95 + i \times 32)$

(with $i = 0$ to 5)

Extended Information (EI) blocks are meant to facilitate future extensions. Each such block consists of 32 bytes. These bytes can hold for instance parameters for alternative write strategies or other advanced parameters. If a set of parameters does not fit in one Extended Information block, additional continuation blocks can be added, which additional blocks are identified by a Continuation bit.

The presence of an Extended Information block shall be indicated by the appropriate bit in byte 18. If an Extended Information block is not used, all 32 bytes shall be set to (00).

Byte $(64 + i \times 32)$ Extended Information block i Format number / Continuation bit

Bits b_6 to b_0 indicate the Format number which identifies the definitions of the data in bytes $(65 + i \times 32)$ to $(95 + i \times 32)$.

If bit b_7 is set to ONE, the related Extended Information block is not an independent block but a continuation of the preceding Extended Information block. The Format number in a continuation block shall be the same as the Format number in the preceding Extended Information block.

A disc can have several Extended Information blocks. The contents of blocks with different Format numbers have to be interpreted each according to their respective definitions. The contents of blocks with the same Format number are interpreted in the same way; the parameters specified in these blocks however can have different values.

Drives not acquainted with the specific Format number in block i , should not use the parameters in this Extended Information block (see Annex P).

Note: the contents of an EI block are identified by the Format number of the block only. The position of the EI block in the ADIP Aux Frame is irrelevant for this, so an EI block with Format number n could be allocated at any position i . Therefore drives should always check the Format numbers in the EI blocks to be sure that the write strategies are correctly interpreted.

Bytes $(65 + i \times 32)$ to $(95 + i \times 32)$

Each parameter set defined for these bytes shall be identified by a unique Format number.

Bytes 248 to 255 - Reserved for use in the Control Data Zone - All (00)

These bytes can not be copied to the Control Data Zone and shall therefore not be used and be set to (00).

14.4.2.3.1 Extended information for the “4x+” write strategy

This Extended Information block specifies the parameters for a write strategy usable at speeds of 4 times the basic DVD speed ($4 \times 3,49$ m/s) or higher. The write strategy used at these speeds is a so-called “Blocked” write strategy as defined in Annex G.2.

If the disc can not be recorded under these “4x+” conditions, this EI block shall not be used (all bytes set to (00) and related Extended Information indicator bit set to ZERO).

Byte 18 – Extended Information indicators

This byte shall be set to xxxx xxx1 indicating Extended Information block 0 is in use.

Table 5 - Extended Information block 0

Byte number	Content	Number of bytes
64	Continuation bit / Format number	1
65	Reserved - set to (00)	1
66	Primary recording velocity for the parameter set in this EI block	1
67	Upper recording velocity for the parameter set in this EI block	1
68	Maximum read power at Primary velocity	1
69	P_{IND} at Primary velocity	1
70	β_{target} at Primary velocity	1
71	dPw (=3T) power enhancement for cm =3T at Primary velocity	1
72	dPw (=4T) power enhancement for cm =4T at Primary velocity	1
73	T_{top} ($\geq 4T$) first part of write pulse for cm $\geq 4T$ at Primary velocity (= dT_{top} ($\geq 4T$) + T_W)	1
74	T_{top} (=3T) write pulse duration for cm =3T at Primary velocity	1
75	T_{mp} at Primary velocity (= T_W)	1
76	T_{lp} last part of write pulse for cm $\geq 4T$ at Primary velocity	1
77	dT_{top} ($\geq 4T$) write pulse lead time for cm $\geq 4T$ at Primary velocity	1
78	dT_{top} (=3T) write pulse lead time for cm =3T at Primary velocity	1
79	dT_{le} write pulse leading edge shift for ps =3T at Primary velocity	1
80 to 81	Reserved - All (00)	2
82	Maximum read power at Upper velocity	1
83	P_{IND} at Upper velocity	1
84	β_{target} at Upper velocity	1
85	dPw (=3T) power enhancement for cm =3T at Upper velocity	1
86	dPw (=4T) power enhancement for cm =4T at Upper velocity	1
87	T_{top} ($\geq 4T$) first part of write pulse for cm $\geq 4T$ at Upper velocity (= dT_{top} ($\geq 4T$) + T_W)	1
88	T_{top} (=3T) write pulse duration for cm =3T at Upper velocity	1
89	T_{mp} at Upper velocity (= T_W)	1
90	T_{lp} last part of write pulse for cm $\geq 4T$ at Upper velocity	1
91	dT_{top} ($\geq 4T$) write pulse lead time for cm $\geq 4T$ at Upper velocity	1
92	dT_{top} (=3T) write pulse lead time for cm =3T at Upper velocity	1
93	dT_{le} write pulse leading edge shift for ps =3T at Upper velocity	1
94 to 95	Reserved - All (00)	2

Byte 64 - Extended Information block 0 Continuation bit / Format number

This byte shall be set to 0000 0001, indicating Format 1 and this block not being a continuation block, for which bytes 65 to 95 have the following meaning:

Byte 65 - Reserved

This byte is reserved and shall be set to (00)

Byte 66 – Primary recording velocity for the parameter set in this EI block

This byte indicates the lowest recording velocity of the disc for the parameters as defined in this EI block. This recording velocity shall be specified as a number n such that

$$n = 4 \times v_{\text{Primary,EI } 0} \text{ (} n \text{ rounded off to an integral value)}$$

It shall be

set to (38) indicating a Primary writing speed of about 14 m/s (4x).

Byte 67 – Upper recording velocity for the parameter set in this EI block

This byte indicates the highest recording velocity of the disc for the parameters as defined in this EI block. This recording velocity shall be specified as a number n such that

$$n = 4 \times v_{\text{Upper,EI } 0} \text{ (} n \text{ rounded off to an integral value)}$$

It shall be

set to (38) indicating an Upper writing speed of about 14 m/s (4x). (In future, when higher recording speeds which are compatible with this write strategy become possible, higher values can be allowed.)

Byte 68 - Maximum read power, P_r at Primary velocity

This byte shall specify the maximum read power P_r in milliwatts at Primary velocity as a number n such that

$$n = 20 \times (P_r - 0,7)$$

Byte 69 - P_{IND} at Primary velocity

P_{IND} is the starting value for the determination of P_{wo} used in the OPC algorithm, see Annex I and Annex K. This byte shall specify the indicative value P_{IND} of P_{wo} in milliwatts at Primary velocity and λ_{IND} as a number n such that

$$n = 5 \times (P_{\text{IND}} - 5)$$

Byte 70 - β_{target} at Primary velocity

This byte shall specify the target value for β , β_{target} at Primary velocity used in the OPC algorithm (see Annex I) as a number n such that

$$n = 100 \times (\beta_{\text{target}} + 1)$$

Byte 71 - dPw (=3T) power enhancement for current mark =3T at Primary velocity

This byte shall specify the additional power for writing the 3T marks (see Annex G.2) at Primary velocity as a number n such that

$$n = 200 \times \text{dPw} / P_{\text{wo}} \quad \text{and} \quad 0 \leq n \leq 100$$

Byte 72 - dPw (=4T) power enhancement for current mark =4T at Primary velocity

This byte shall specify the additional power for writing the 4T marks (see Annex G.2) at Primary velocity as a number n such that

$$n = 200 \times \text{dPw} / P_{\text{wo}} \quad \text{and} \quad 0 \leq n \leq 100$$

Byte 73 – $T_{\text{top}} (\geq 4\text{T})$ first part of write pulse for current mark $\geq 4\text{T}$ at Primary velocity

This byte shall specify the duration of the first part of the write pulse when the current mark is a 4T or greater mark for recording at Primary velocity (see Annex G.2). The value is expressed in fractions of the Channel bit clock period as a number n such that

$$n = 16 \times \frac{T_{\text{top}}}{T_{\text{W}}} \quad \text{and} \quad n = \text{value of byte 77} + 16$$

Byte 74 – T_{top} (=3T) write pulse duration for current mark =3T at Primary velocity

This byte shall specify the duration of the write pulse when the current mark is a 3T mark for recording at Primary velocity (see Annex G.2). The value is expressed in fractions of the Channel bit clock period as a number n such that

$$n = 16 \times \frac{T_{top}}{T_W} \quad \text{and} \quad 4 \leq n \leq 48$$

Byte 75 – T_{mp} at Primary velocity

This byte has been added for consistency with the basic description of the write strategy (see Annex G). The value is expressed in fractions of the Channel bit clock period as a number n such that

$$n = 16 \times \frac{T_{mp}}{T_W} \quad \text{and} \quad n = 16$$

Byte 76 – T_{lp} last part of write pulse at Primary velocity

This byte shall specify the duration of the last part of the write pulse when the current mark is a 4T or greater mark for recording at Primary velocity (see Annex G.2). The value is expressed in fractions of the Channel bit clock period as a number n such that

$$n = 16 \times \frac{T_{lp}}{T_W} \quad \text{and} \quad 0 \leq n \leq 16$$

Byte 77 – dT_{top} ($\geq 4T$) write pulse lead time for current mark $\geq 4T$ at Primary velocity

When the current mark is a 4T or greater mark, this byte shall specify the lead time of the write pulse relative to the trailing edge of the second Channel bit of the data pulse, for recording at Primary velocity (see Annex G.2). The value is expressed in fractions of the Channel bit clock period as a number n such that

$$n = 16 \times \frac{dT_{top}}{T_W} \quad \text{and} \quad 0 \leq n \leq 32$$

Byte 78 – dT_{top} (=3T) write pulse lead time for current mark =3T at Primary velocity

When the current mark is a 3T mark, this byte shall specify the lead time of the write pulse relative to the trailing edge of the second Channel bit of the data pulse, for recording at Primary velocity (see Annex G.2). The value is expressed in fractions of the Channel bit clock period as a number n such that

$$n = 16 \times \frac{dT_{top}}{T_W} \quad \text{and} \quad 0 \leq n \leq 32$$

Byte 79 – dT_{le} write pulse leading edge shift for previous space =3T at Primary velocity

This byte shall specify the leading edge shift for the write pulse when the previous space was a 3T space for recording at Primary velocity (see Annex G.2). The value is expressed in fractions of the Channel bit clock period as a number n such that

$$n = 16 \times \frac{dT_{le}}{T_W} \quad \text{and} \quad 0 \leq n \leq 4$$

Bytes 80 to 81 - Reserved - All (00)

These bytes shall be set to all (00).

Byte 82 - Maximum read power, P_r at Upper velocity

This byte shall specify the maximum read power P_r in milliwatts at Upper velocity as a number n such that

$$n = 20 \times (P_r - 0,7)$$

Byte 83 - P_{IND} at Upper velocity

P_{IND} is the starting value for the determination of P_{wo} used in the OPC algorithm, see Annex I and Annex K. This byte shall specify the indicative value P_{IND} of P_{wo} in milliwatts at Upper velocity and λ_{IND} as a number n such that

$$n = 5 \times (P_{IND} - 5)$$

Byte 84 - β_{target} at Upper velocity

This byte shall specify the target value for β , β_{target} at Upper velocity used in the OPC algorithm (see Annex I) as a number n such that

$$n = 100 \times (\beta_{target} + 1)$$

Byte 85 - dPw (=3T) power enhancement for current mark =3T at Upper velocity

This byte shall specify the additional power for writing the 3T marks (see Annex G.2) at Upper velocity as a number n such that

$$n = 200 \times dPw / P_{wo} \quad \text{and} \quad 0 \leq n \leq 100$$

Byte 86 - dPw (=4T) power enhancement for current mark =4T at Upper velocity

This byte shall specify the additional power for writing the 4T marks (see Annex G.2) at Upper velocity as a number n such that

$$n = 200 \times dPw / P_{wo} \quad \text{and} \quad 0 \leq n \leq 100$$

Byte 87 – T_{top} ($\geq 4T$) first part of write pulse for current mark $\geq 4T$ at Upper velocity

This byte shall specify the duration of the first part of the write pulse when the current mark is a 4T or greater mark for recording at Upper velocity (see Annex G.2). The value is expressed in fractions of the Channel bit clock period as a number n such that

$$n = 16 \times \frac{T_{top}}{T_W} \quad \text{and} \quad n = \text{value of byte 91} + 16$$

Byte 88 – T_{top} (=3T) write pulse duration for current mark =3T at Upper velocity

This byte shall specify the duration of the write pulse when the current mark is a 3T mark for recording at Upper velocity (see Annex G.2). The value is expressed in fractions of the Channel bit clock period as a number n such that

$$n = 16 \times \frac{T_{top}}{T_W} \quad \text{and} \quad 4 \leq n \leq 48$$

Byte 89 – T_{mp} at Upper velocity

This byte has been added for consistency with the basic description of the write strategy (see Annex G). The value is expressed in fractions of the Channel bit clock period as a number n such that

$$n = 16 \times \frac{T_{mp}}{T_W} \quad \text{and} \quad n = 16$$

Byte 90 – T_{lp} last part of write pulse at Upper velocity

This byte shall specify the duration of the last part of the write pulse when the current mark is a 4T or greater mark for recording at Upper velocity (see Annex G.2). The value is expressed in fractions of the Channel bit clock period as a number n such that

$$n = 16 \times \frac{T_{lp}}{T_W} \quad \text{and} \quad 0 \leq n \leq 16$$

Byte 91 – dT_{top} (≥4T) write pulse lead time for current mark ≥4T at Upper velocity

When the current mark is a 4T or greater mark, this byte shall specify the lead time of the write pulse relative to the trailing edge of the second Channel bit of the data pulse, for recording at Upper velocity (see Annex G.2). The value is expressed in fractions of the Channel bit clock period as a number n such that

$$n = 16 \times \frac{dT_{top}}{T_W} \quad \text{and} \quad 0 \leq n \leq 32$$

Byte 92 – dT_{top} (=3T) write pulse lead time for current mark =3T at Upper velocity

When the current mark is a 3T mark, this byte shall specify the lead time of the write pulse relative to the trailing edge of the second Channel bit of the data pulse, for recording at Upper velocity (see Annex G.2). The value is expressed in fractions of the Channel bit clock period as a number n such that

$$n = 16 \times \frac{dT_{top}}{T_W} \quad \text{and} \quad 0 \leq n \leq 32$$

Byte 93 – dT_{le} write pulse leading edge shift for previous space =3T at Upper velocity

This byte shall specify the leading edge shift for the write pulse when the previous space was a 3T space for recording at Upper velocity (see Annex G.2). The value is expressed in fractions of the Channel bit clock period as a number n such that

$$n = 16 \times \frac{dT_{le}}{T_W} \quad \text{and} \quad 0 \leq n \leq 4$$

Bytes 94 to 95 - Reserved - All (00)

These bytes shall be set to all (00).

14.4.2.3.2 Extended information for the “6x+” write strategy (8x parameters)

This Extended Information block specifies the parameters for a write strategy usable at speeds of 6 times the basic DVD speed (6×3,49 m/s) or higher. The write strategy used at these speeds is a so-called “Castle” write strategy as defined in Annex G.3.

Because of too high rotational speeds at the inner side (see 9.5), the write strategy parameters for the Upper velocity shall be determined at the outer diameter of the disc.

If the disc can not be recorded under these “6x+” conditions, this EI block shall not be used (all bytes set to (00) and related Extended Information indicator bit set to ZERO).

Byte 18 – Extended Information indicators

This byte shall be set to xxxx xx1x indicating Extended Information block 1 is in use.

Table 6 - Extended Information block 1

Byte number	Content	Number of bytes
96	Continuation bit / Format number	1
97	Reserved - set to (00)	1
98	Primary recording velocity for the parameter set in this EI block	1
99	Upper recording velocity for the parameter set in this EI block	1
100	Maximum read power at Primary velocity	1
101	P_{IND} at Primary velocity	1
102	β_{target} at Primary velocity	1
103	dPw power enhancement at Primary velocity	1
104	T_{I3} write pulse duration for 3T marks at Primary velocity	1
105	T_{top} duration of power enhancement at Primary velocity	1
106	$T_{end} (\geq 5T)$ duration of power enhancement for $cm \geq 5T$ at Primary velocity	1
107	$T_{end} (=4T)$ duration of power enhancement for $cm =4T$ at Primary velocity	1
108	dT_{le} write pulse leading edge shift for $ps =3T$ at Primary velocity	1
109	T_C end of cooling gap at Primary velocity	1
110 to 113	Reserved - All (00)	4
114	Maximum read power at Upper velocity	1
115	P_{IND} at Upper velocity	1
116	β_{target} at Upper velocity	1
117	dPw power enhancement at Upper velocity	1
118	T_{I3} write pulse duration for 3T marks at Upper velocity	1
119	T_{top} duration of power enhancement at Upper velocity	1
120	$T_{end} (\geq 5T)$ duration of power enhancement for $cm \geq 5T$ at Upper velocity	1
121	$T_{end} (=4T)$ duration of power enhancement for $cm =4T$ at Upper velocity	1
122	dT_{le} write pulse leading edge shift for $ps =3T$ at Upper velocity	1
123	T_C end of cooling gap at Upper velocity	1
124 to 126	Reserved - All (00)	3
127	$P_{upper}/P_{primary}$ ratio	1

Byte 96 - Extended Information block 1 Continuation bit / Format number

This byte shall be set to 0000 0010, indicating Format 2 and this block not being a continuation block, for which bytes 97 to 127 have the following meaning:

Byte 97 - Reserved

This byte is reserved and shall be set to all (00).

Byte 98 – Primary recording velocity for the parameter set in this EI block

This byte indicates the lowest recording velocity of the disc for the parameters as defined in this EI block. This recording velocity shall be specified as a number n such that

$$n = 4 \times v_{\text{Primary, EI 1}} \text{ (} n \text{ rounded off to an integral value)}$$

It shall be

set to (54) indicating a Primary writing speed of about 21 m/s (6x).

Byte 99 – Upper recording velocity for the parameter set in this EI block

This byte indicates the highest recording velocity of the disc for the parameters as defined in this EI block. This recording velocity shall be specified as a number n such that

$$n = 4 \times v_{\text{Upper, EI 1}} \text{ (} n \text{ rounded off to an integral value)}$$

It shall be

set to (70) indicating an Upper writing speed of about 28 m/s (8x). (In future, when higher recording speeds which are compatible with this write strategy become possible, higher values can be allowed.)

Byte 100 - Maximum read power, P_r at Primary velocity

This byte shall specify the maximum read power P_r in milliwatts at Primary velocity as a number n such that

$$n = 20 \times (P_r - 0,7)$$

Byte 101 - P_{IND} at Primary velocity

P_{IND} is the starting value for the determination of P_{wo} used in the OPC algorithm, see Annex I and Annex K. This byte shall specify the indicative value P_{IND} of P_{wo} in milliwatts at Primary velocity and λ_{IND} as a number n such that

$$n = 5 \times (P_{\text{IND}} - 5)$$

Byte 102 - β_{target} at Primary velocity

This byte shall specify the target value for β , β_{target} at Primary velocity used in the OPC algorithm (see Annex I) as a number n such that

$$n = 100 \times (\beta_{\text{target}} + 1)$$

Byte 103 - dPw power enhancement at Primary velocity

This byte shall specify the additional power for the 3T write pulse and for the beginning and end of all other write pulses (see Annex G.3) at Primary velocity as a number n such that

$$n = 200 \times \text{dPw} / P_{\text{wo}} \quad \text{and} \quad 0 \leq n \leq 255$$

Byte 104 – T_{I3} write pulse duration for 3T marks at Primary velocity

This byte shall specify the duration of the write pulse when the current mark is a 3T mark for recording at Primary velocity (see Annex G.3). The value is expressed in fractions of the Channel bit clock period as a number n such that

$$n = 16 \times \frac{T_{\text{I3}}}{T_{\text{W}}} \quad \text{and} \quad 16 \leq n \leq 48$$

Byte 105 – T_{top} duration of power enhancement at Primary velocity

This byte shall specify the duration of the power enhancement at the beginning of each write pulse when the current mark is a 4T or greater mark for recording at Primary velocity (see Annex G.3). The value is expressed in fractions of the Channel bit clock period as a number n such that

$$n = 16 \times \frac{T_{top}}{T_W} \quad \text{and} \quad 4 \leq n \leq 32$$

Byte 106 – T_{end} (≥5T) duration of power enhancement for cm ≥5T at Primary velocity

This byte shall specify the duration of the power enhancement at the end of each write pulse when the current mark is a 5T or greater mark for recording at Primary velocity (see Annex G.3). The value is expressed in fractions of the Channel bit clock period as a number n such that

$$n = 16 \times \frac{T_{end}}{T_W} \quad \text{and} \quad 4 \leq n \leq 32$$

Byte 107 – T_{end} (=4T) duration of power enhancement for cm =4T at Primary velocity

This byte shall specify the duration of the power enhancement at the end of each write pulse when the current mark is a 4T mark for recording at Primary velocity (see Annex G.3). The value is expressed in fractions of the Channel bit clock period as a number n such that

$$n = 16 \times \frac{T_{end}}{T_W} \quad \text{and} \quad 4 \leq n \leq 32$$

Byte 108 – dT_{le} write pulse leading edge shift for previous space =3T at Primary velocity

This byte shall specify the leading edge shift for the write pulse when the previous space was a 3T space for recording at Primary velocity (see Annex G.3). The value is expressed in fractions of the Channel bit clock period as a number n such that

$$n = 16 \times \frac{dT_{le}}{T_W} \quad \text{and} \quad 0 \leq n \leq 4$$

Byte 109 – T_C end of cooling gap at Primary velocity

This byte shall specify the end of the cooling gap for recording at Primary velocity (see Annex G.3). The value is expressed in fractions of the Channel bit clock period as a number n such that

$$n = 16 \times \frac{T_C}{T_W} \quad \text{and} \quad 16 \leq n \leq 32$$

Bytes 110 to 113 - Reserved - All (00)

These bytes shall be set to all (00).

Byte 114 - Maximum read power, P_r at Upper velocity

This byte shall specify the maximum read power P_r in milliwatts at Upper velocity as a number n such that

$$n = 20 \times (P_r - 0,7)$$

Byte 115 - P_{IND} at Upper velocity

P_{IND} is the starting value for the determination of P_{wo} used in the OPC algorithm, see Annex I and Annex K. This byte shall specify the indicative value P_{IND} of P_{wo} in milliwatts at Upper velocity and λ_{IND} as a number n such that

$$n = 5 \times (P_{IND} - 5)$$

Byte 116 - β_{target} at Upper velocity

This byte shall specify the target value for β, β_{target} at Upper velocity used in the OPC algorithm (see Annex I) as a number n such that

$$n = 100 \times (\beta_{target} + 1)$$

Byte 117 - dPw power enhancement at Upper velocity

This byte shall specify the additional power for the 3T write pulse and for the beginning and end of all other write pulses (see Annex G.3) at Upper velocity as a number n such that

$$n = 200 \times \text{dPw} / \text{Pwo} \quad \text{and} \quad 0 \leq n \leq 255$$

Byte 118 – T_{I3} write pulse duration for 3T marks at Upper velocity

This byte shall specify the duration of the write pulse when the current mark is a 3T mark for recording at Upper velocity (see Annex G.3). The value is expressed in fractions of the Channel bit clock period as a number n such that

$$n = 16 \times \frac{T_{I3}}{T_W} \quad \text{and} \quad 16 \leq n \leq 48$$

Byte 119 – T_{top} duration of power enhancement at Upper velocity

This byte shall specify the duration of the power enhancement at the beginning of each write pulse when the current mark is a 4T or greater mark for recording at Upper velocity (see Annex G.3). The value is expressed in fractions of the Channel bit clock period as a number n such that

$$n = 16 \times \frac{T_{\text{top}}}{T_W} \quad \text{and} \quad 4 \leq n \leq 32$$

Byte 120 – T_{end} (≥5T) duration of power enhancement for cm ≥5T at Upper velocity

This byte shall specify the duration of the power enhancement at the end of each write pulse when the current mark is a 5T or greater mark for recording at Upper velocity (see Annex G.3). The value is expressed in fractions of the Channel bit clock period as a number n such that

$$n = 16 \times \frac{T_{\text{end}}}{T_W} \quad \text{and} \quad 4 \leq n \leq 32$$

Byte 121 – T_{end} (=4T) duration of power enhancement for cm =4T at Upper velocity

This byte shall specify the duration of the power enhancement at the end of each write pulse when the current mark is a 4T mark for recording at Primary velocity (see Annex G.3). The value is expressed in fractions of the Channel bit clock period as a number n such that

$$n = 16 \times \frac{T_{\text{end}}}{T_W} \quad \text{and} \quad 4 \leq n \leq 32$$

Byte 122 – dT_{le} write pulse leading edge shift for previous space =3T at Upper velocity

This byte shall specify the leading edge shift for the write pulse when the previous space was a 3T space for recording at Upper velocity (see Annex G.3). The value is expressed in fractions of the Channel bit clock period as a number n such that

$$n = 16 \times \frac{dT_{\text{le}}}{T_W} \quad \text{and} \quad 0 \leq n \leq 4$$

Byte 123 – T_C end of cooling gap at Upper velocity

This byte shall specify the end of the cooling gap for recording at Upper velocity (see Annex G.3). The value is expressed in fractions of the Channel bit clock period as a number n such that

$$n = 16 \times \frac{T_C}{T_W} \quad \text{and} \quad 16 \leq n \leq 32$$

Bytes 124 to 126 - Reserved - All (00)

These bytes shall be set to all (00).

Byte 127 – P_{upper}/P_{primary} ratio

This byte shall specify the ratio of the optimized write power at the Upper recording velocity, Pwo_{Upper}, and the optimized write power at the Primary recording velocity, Pwo_{Primary}, where Pwo_{Upper} and Pwo_{Primary} shall be the write power level without emphasis determined at about the same diameter. The ratio is expressed as a number n such that

$$n = 200 \times \left(\frac{P_{woUpper}}{P_{woPrimary}} - 1 \right)$$

14.4.2.3.3 Extended information for the “6x+” write strategy (16x parameters)

This Extended Information block specifies the parameters for a write strategy usable at speeds of 6 times the basic DVD speed ($6 \times 3,49$ m/s) up to 16 times the basic DVD speed ($16 \times 3,49$ m/s). The write strategy used at these speeds is basically the same “Castle” write strategy as for the 8x disc defined in 14.4.2.3.2 and Annex G.3. Only some parameters have adapted ranges for their values.

Because of too high rotational speeds at the inner side (see 9.5), the write strategy parameters for the Upper velocity shall be determined at the outer diameter of the disc.

If the disc can not be recorded under these “6x+” conditions, this EI block shall not be used (all bytes set to (00) and related Extended Information indicator bit set to ZERO).

Byte 18 – Extended Information indicators

This byte shall be set to xxxx x1xx indicating Extended Information block 2 is in use.

Table 7 - Extended Information block 2

Byte number	Content	Number of bytes
128	Continuation bit / Format number	1
129	Reserved - set to (00)	1
130	Primary recording velocity for the parameter set in this EI block	1
131	Upper recording velocity for the parameter set in this EI block	1
132	Maximum read power at Primary velocity	1
133	P_{IND} at Primary velocity	1
134	β_{target} at Primary velocity	1
135	dPw power enhancement at Primary velocity	1
136	T_{I3} write pulse duration for 3T marks at Primary velocity	1
137	T_{top} duration of power enhancement at Primary velocity	1
138	$T_{end} (\geq 5T)$ duration of power enhancement for $cm \geq 5T$ at Primary velocity	1
139	$T_{end} (=4T)$ duration of power enhancement for $cm = 4T$ at Primary velocity	1
140	dT_{le} write pulse leading edge shift for $ps = 3T$ at Primary velocity	1
141	T_C end of cooling gap at Primary velocity	1
142 to 145	Reserved - set to (00)	4
146	Maximum read power at Upper velocity	1
147	P_{IND} at Upper velocity	1
148	β_{target} at Upper velocity	1
149	dPw power enhancement at Upper velocity	1
150	T_{I3} write pulse duration for 3T marks at Upper velocity	1
151	T_{top} duration of power enhancement at Upper velocity	1
152	$T_{end} (\geq 5T)$ duration of power enhancement for $cm \geq 5T$ at Upper velocity	1
153	$T_{end} (=4T)$ duration of power enhancement for $cm = 4T$ at Upper velocity	1
154	dT_{le} write pulse leading edge shift for $ps = 3T$ at Upper velocity	1
155	T_C end of cooling gap at Upper velocity	1
156 to 158	Reserved - set to (00)	3
159	$P_{upper}/P_{primary}$ ratio	1

Byte 128 - Extended Information block 2 Continuation bit / Format number

This byte shall be set to 0000 0011, indicating Format 3 and this block not being a continuation block, for which bytes 129 to 159 have the following meaning:

Byte 129 - Reserved

This byte is reserved and shall be set to all (00).

Byte 130 – Primary recording velocity for the parameter set in this EI block

This byte indicates the lowest recording velocity of the disc for the parameters as defined in this EI block. This recording velocity shall be specified as a number n such that

$$n = 4 \times v_{\text{Primary, EI 1}} \text{ (} n \text{ rounded off to an integral value)}$$

It shall be

set to (54) indicating a Primary writing speed of about 21 m/s (6x).

Byte 131 – Upper recording velocity for the parameter set in this EI block

This byte indicates the highest recording velocity of the disc for the parameters as defined in this EI block. This recording velocity shall be specified as a number n such that

$$n = 4 \times v_{\text{Upper, EI 1}} \text{ (} n \text{ rounded off to an integral value)}$$

It shall be

set to (DF) indicating an Upper writing speed of about 55,8 m/s (16x).

Bytes 132 to 140

These bytes shall have the same definitions and value ranges as bytes 100 to 108 in 14.4.2.3.2.

Byte 141 – T_C end of cooling gap at Primary velocity

This byte shall specify the end of the cooling gap for recording at Primary velocity (see Annex G.3). The value is expressed in fractions of the Channel bit clock period as a number n such that

$$n = 16 \times \frac{T_C}{T_W} \quad \text{and} \quad 16 \leq n \leq 40$$

Note: to preserve good tracking signals during recording, it is recommended to keep the cooling gap as short as possible.

Bytes 142 to 145 - Reserved - All (00)

These bytes shall be set to all (00).

Bytes 146 to 154

These bytes shall have the same definitions and value ranges as bytes 114 to 122 in 14.4.2.3.2.

Byte 155 – T_C end of cooling gap at Upper velocity

This byte shall specify the end of the cooling gap for recording at Upper velocity (see Annex G.3). The value is expressed in fractions of the Channel bit clock period as a number n such that

$$n = 16 \times \frac{T_C}{T_W} \quad \text{and} \quad 16 \leq n \leq 40$$

Note: to preserve good tracking signals during recording, it is recommended to keep the cooling gap as short as possible.

Bytes 156 to 158 - Reserved - All (00)

These bytes shall be set to all (00).

Byte 159 – P_{upper}/P_{primary} ratio

This byte shall specify the ratio of the optimized write power at the Upper recording velocity, Pwo_{Upper}, and the optimized write power at the Primary recording velocity speed, Pwo_{Primary}, where Pwo_{Upper} and Pwo_{Primary} shall be the write power level without emphasis determined at about the same diameter. The ratio is expressed as a number n such that

$$n = 200 \times \left(\frac{Pwo_{Upper}}{Pwo_{Primary}} - 1,5 \right)$$

Section 4 - Format of the Information Zone

15 General description of the Information Zone

The Information Zone shall contain all information on the disc relevant for data interchange. The Information Zone may contain one or more sessions (see clause 22). In double-sided discs there is one Information Zone per side. The Data Zones are intended for the recording of User Data.

The Lead-in Zone contains control information. The Lead-out Zone allows for a continuous smooth lead-out and also contains control information.

The Inner and Outer Drive Areas are meant for disc testing.

In the next clauses 16 to 21 a description is given for a Single-session disc. In such a disc, the Lead-in Zone, the Data Zone and the Lead-out Zone constitute the recordable area in which the information is recorded using a non-reversible effect. The layout of a Multi-session disc is defined in clause 22.

16 Layout of the Information Zone of a Single-session disc

The Information Zone of single-sided and of each side of double-sided discs shall be sub-divided as shown in Table 8. The radii indicated in Table 8 for some of the Zones are the nominal values of the centre of the first (or last) track of the Zone.

16.1 Physical Sector Numbers (PSNs)

The first Physical Sector of the Data Zone shall have PSN (030000). The PSNs increase by 1 for each next Physical Sector in the whole Information Zone. (Figure 22).

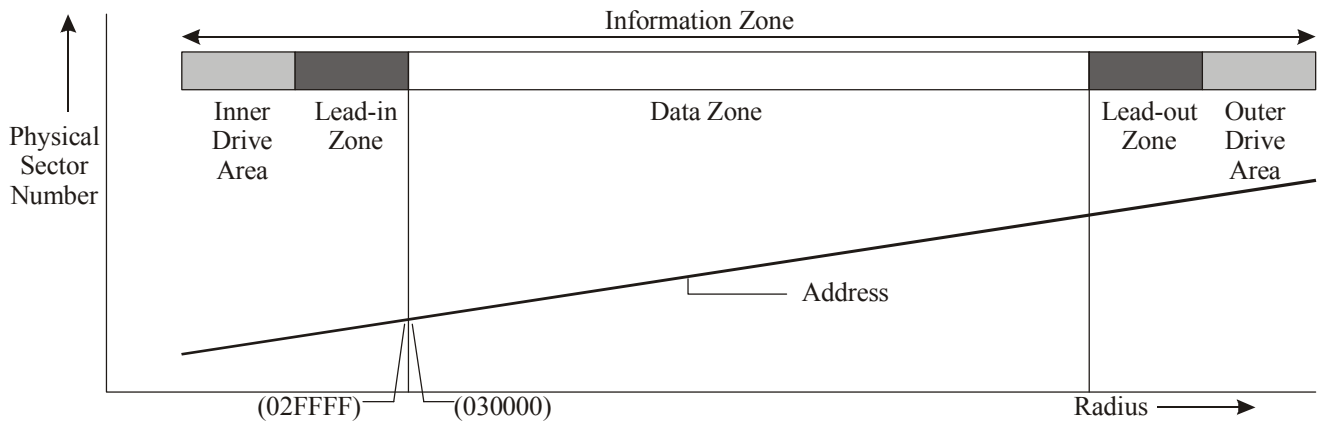


Figure 22 - Physical Sector numbering

Note: The Physical Sector Number of the first Physical Sector of the Data Zone is large enough so as to prevent a Physical Sector Number ≤ 0 to occur anywhere on the disc.

Table 8 - Layout of a fully recorded Single-session disc (for 80 mm disc see Annex A)

	Description	Nominal radius in mm	PSN of the first Physical Sector	Number of Physical Sectors
<u>Inner Drive Area</u>	Initial Zone	start 22,000 mm	--	blank
	Inner Disc Test Zone	start 22,616 mm	(023080)	16 384
	Count Zone Run-in	start 23,052 mm	(027080)	1 024
	Inner Disc Count Zone	start 23,079 mm	(027480)	4 096
	Inner Disc Administration Zone	start 23,186 mm	(028480)	4 096
	Table of Contents Zone	start 23,293 mm	(029480)	4 096
<u>Lead-in</u>	Guard Zone 1	start 23,400 mm	(02A480)	14 848
	Reserved Zone 1		(02DE80)	4 096
	Reserved Zone 2		(02EE80)	64
	Inner Disc Identification Zone		(02EEC0)	256
	Reserved Zone 3		(02EFC0)	64
	Reference Code Zone	start 23,896 mm	(02F000)	32
	Buffer Zone 1		(02F020)	480
	Control Data Zone		(02F200)	3 072
	Buffer Zone 2		(02FE00)	512
<u>Data</u>	Data Zone	start 24,000 mm	(030000)	2 295 104 max
<u>Lead-out</u>	Buffer Zone 3	start 58,000 mm (at full capacity)	(260540) max	768
	Outer Disc Identification Zone		(260840) max	256
	Guard Zone 2		(260940) max	4 096 min
<u>Outer Drive Area</u>	Outer Disc Administration Zone	start 58,053 mm	(261940)	4 096
	Outer Disc Count Zone	start 58,096 mm	(262940)	4 096
	Outer Disc Test Zone	start 58,139 mm	(263940)	16 384
	Guard Zone 3	start 58,310 mm end ≥ 58,500 mm	(267940)	blank

17 Inner Drive Area

The Inner Drive Area is the innermost zone of the disc which is used by the drive for performing disc tests and OPC algorithms. It shall consist of the parts shown in Figure 23.

The Physical Sector Number of the first and last Physical Sector of each part is indicated in Figure 23 in hexadecimal and decimal notation and the number of Physical Sectors in each part are indicated in decimal notation.

Unused ECC Blocks in the Inner Drive Area shall be left unrecorded (also at finalization of the disc).

	Initial Zone	
Physical Sector 143 488	Inner Disc Test Zone 16 384 Physical Sectors	Physical Sector (023080)
Physical Sector 159 871 Physical Sector 159 872		Physical Sector (02707F) Physical Sector (027080)
Physical Sector 160 895 Physical Sector 160 896	Count Zone Run-in 1 024 Physical Sectors	Physical Sector (02747F) Physical Sector (027480)
Physical Sector 164 991 Physical Sector 164 992	Inner Disc Count Zone 4 096 Physical Sectors	Physical Sector (02847F) Physical Sector (028480)
Physical Sector 169 087 Physical Sector 169 088	Inner Disc Administration Zone 4 096 Physical Sectors	Physical Sector (02947F) Physical Sector (029480)
Physical Sector 173 183	Table of Contents Zone 4 096 Physical Sectors	Physical Sector (02A47F)
	Lead-in Zone	

Figure 23 – Inner Drive Area

17.1 Initial Zone

This Zone shall remain blank.

17.2 Inner Disc Test Zone

16 384 Physical Sectors reserved for drive testing and OPC algorithms (see Annex I). The order in which these Physical Sectors shall be used is from the outer side of the disc towards the inner side of the disc, so from the highest address towards the lowest address.

17.3 Count Zone Run-in

This area with the size of 1 024 Physical Sectors is meant as a Run-in area for the Inner Disc Count Zone and shall be left unrecorded.

17.4 Inner Disc Count Zone

4 096 Physical Sectors reserved for counting the number of OPC algorithms performed in the Inner Disc Test Zone (see Annex I).

Whenever an ECC Block or part of it in the Inner Disc Test Zone has been recorded, the ECC Block shall be flagged by recording 4 Physical Sectors in the Inner Disc Count Zone. These 4 Physical Sectors shall be formatted according to the rules specified in 13.1 and the underlying subclauses, 13.2, 13.4, 13.5 and 13.6, whereby the Main Data bytes and the PI and PO bytes (see 13.3) can be chosen freely.

The relation between the first Physical Sector number PSN_{IDT} of the used ECC Block in the Inner Disc Test Zone and the Physical Sector numbers PSN_{IDC} to $PSN_{IDC} + 3$ of the 4 Physical Sectors in the Inner Disc Count Zone is determined by the following mathematical expression:

$$PSN_{IDC} = \{(PSN_{IDT}) - (023080)\} / (04) + (027480)$$

17.5 Inner Disc Administration Zone

4 096 Physical Sectors to be used for optional drive specific information. The first 16 physical sectors of this Zone shall be filled with all Main Data set to (00).

Table 9 – General format of Disc Administration ECC Blocks

Physical Sector of each Adm. Block	Main Data BP	Description
0	D ₀ to D ₃	Content Descriptor
0	D ₄ to D ₇	Reserved and set to (00)
0	D ₈ to D ₃₉	Drive ID
0	D ₄₀ to D ₆₃	Reserved and set to (00)
0	D ₆₄ to D _{2 047}	Drive Specific
1 to 15	D ₀ – D _{2 047}	Drive Specific

Physical Sector 0 / bytes D₀ to D₃ – Content Descriptor

these bytes identify the Administration Block and shall be set to (41444D00), representing the characters “ADM” and the version number 0.

Physical Sector 0 / bytes D₄ to D₇ – Reserved

these bytes are reserved and shall be set to (00)

Physical Sector 0 / bytes D₈ to D₃₉ – Drive ID

these bytes shall contain the drive ID as specified in 25.1, bytes D₈ to D₃₉ .

Physical Sector 0 / bytes D₄₀ to D₆₃ – Reserved

these bytes are reserved and shall be set to (00)

Physical Sector 0 / bytes D₆₄ to D_{2 047} – Drive Specific

these bytes may be used to store Drive Specific information. The format is not defined and can be freely chosen by the drive manufacturer.

Physical Sectors 1 to 15 / bytes D₀ to D_{2 047} – Drive Specific

these bytes may be used to store Drive Specific information. The format is not defined and can be freely chosen by the drive manufacturer.

17.6 Table of Contents (TOC) Zone

4 096 Physical Sectors to store information about the locations of Sessions and recordings on the disc. The first 16 physical sectors of this Zone shall be filled with all Main Data set to (00).

This Zone consists of 2 parts:

- part 1: consists of 191 ECC Blocks (TOC Blocks) to be used to store the locations of all Closed Sessions,
- part 2: consists of 1024 Physical Sectors, grouped in units of 4 sectors, where each unit corresponds to one ADIP word. These units shall be used as Recorded Area Indicators.

17.6.1 Table of Contents Blocks

Whenever a Session is closed, the next ECC Block in the Table of Contents Zone, immediately following the last TOC Block, shall be recorded with the locations of all Closed Sessions. The first ECC Block in the Table of Contents Zone has to be used as a run-in for the second ECC Block. If all 191 TOC Blocks have been used, no additional Sessions shall be added (see also 23.2 and 23.3).

The format of the TOC Blocks shall be as defined in Table 10:

Table 10 - Format of the TOC Blocks

Physical Sector of TOC block	Main Data byte position	Description	number of bytes
0	D ₀ to D ₃	Content Descriptor	4
0	D ₄ to D ₇	Reserved and set to (00)	4
0	D ₈ to D ₃₉	Drive ID	32
0	D ₄₀ to D ₆₃	Reserved and set to (00)	24
0	D ₆₄ to D ₇₉	TOC Item 0	16
0	...		
0	D _{64+i×16} to D _{79+i×16}	TOC Item i	16
0	
0	D _{64+(N-1)×16} to D _{79+(N-1)×16}	TOC Item N-1	16
0	D _{64+N×16} to D _{2 047}	Reserved and set to (00)	1 984 - N×16
1 to 3	D ₀ to D _{2 047}	Extension for TOC Items or Reserved and set to (00)	3×2 048
4 to 7	D ₀ to D _{2 047}	Repetition of Sectors 0 to 3 (recommended) or Reserved and set to (00)	4×2 048
8 to 11	D ₀ to D _{2 047}	Repetition of Sectors 0 to 3 (recommended) or Reserved and set to (00)	4×2 048
12 to 15	D ₀ to D _{2 047}	Repetition of Sectors 0 to 3 (recommended) or Reserved and set to (00)	4×2 048

Physical Sector 0 / bytes D₀ to D₃ – Content Descriptor

these bytes identify the TOC Block and shall be set to (544F4300), representing the characters “TOC” and the version number 0.

Physical Sector 0 / bytes D₄ to D₇ – Reserved

these bytes are reserved and shall be set to (00)

Physical Sector 0 / bytes D₈ to D₃₉ – Drive ID

these bytes shall contain the drive ID as specified in 25.1, bytes D₈ to D₃₉.

Physical Sector 0 / bytes D₄₀ to D₆₃ – Reserved

these bytes are reserved and shall be set to (00)

Physical Sector 0 / bytes D₆₄ to D_{2 047} – TOC Items

these bytes are grouped in units of 16 bytes each. Each unit of 16 bytes may contain a TOC Item according to the format defined in 17.6.1.1. All bytes not containing TOC Items shall be set to (00).

Physical Sectors 1 to 3 / bytes D₀ to D_{2 047} – Extension for TOC Items or Reserved

these bytes may hold additional TOC Items.

All bytes not containing TOC Items shall be set to (00).

Physical Sectors 4 to 15 / bytes D₀ to D_{2 047} – 3 Repetitions of Sectors 0 to 3 or all Reserved

For robustness reasons it is recommended to repeat the content of Sectors 0 to 3 in Sectors 4 to 7, in Sectors 8 to 11 and in Sectors 12 to 15.

If this option is not used, these bytes shall be set to (00).

It is a matter of drive implementation to recognize and make use of the repetitions.

17.6.1.1 TOC Items:

Item byte position	Description	number of bytes
B ₀ to B ₂	TOC Item descriptor	3
B ₃	Session Status	1
B ₄	Session number	1
B ₅ to B ₇	Session start address	3
B ₈ to B ₁₀	Session end address	3
B ₁₁ to B ₁₂	Last Fragment number in Session	2
B ₁₃ to B ₁₅	Reserved and set to (00)	3

The TOC Block shall contain a TOC Item for each Closed Session on the disc. The TOC Items shall be ordered with increasing numbers and addresses.

TOC Item bytes B₀ to B₂ – TOC Item descriptor

these 3 bytes identify the item type and shall be set to (544349), representing the characters “TCI”.

TOC Item byte B₃ – Session Status

this byte shall indicate the Status of the last Session. It shall be set to (00) in all TOC Items, except in the TOC Item describing the last Session on the disc.

If set to (00) in the last TOC Item, adding a new Session to the disc is allowed.

If set to (01) in the last TOC Item, the last Session shall be the final Session on the disc. The disc has been finalized and adding new Sessions is not allowed (see 23.3)

TOC Item byte B₄ – Session number

this byte shall specify the sequence number of the Session specified in this item.

TOC Item bytes B₅ to B₇ – Session start address

these 3 bytes shall specify the PSN of the first Physical Sector in the Data Zone of the Session specified in this item.

TOC Item bytes B₈ to B₁₀ – Session end address

these 3 bytes shall specify the PSN of the last Physical Sector in the Data Zone of the Session specified in this item.

TOC Item bytes B₁₁ to B₁₂ – Last Fragment number in Session

these 2 bytes specify the sequence number of the last Fragment in the Session specified in this item.

If this option is not used, these bytes shall be set to (00).

TOC Item bytes B₁₃ to B₁₅ – Reserved

these 3 bytes are reserved and shall be set to (00).

17.6.2 Recorded Area Indicators (optional)

To speed up the access of the disc, the recorder needs to know in which region of the disc the last written ECC Block can be found. For this purpose a kind of “bitmap” is defined, based on recorded areas with the size of 4 Physical Sectors, each area corresponding to one ADIP word. The 4 Physical Sectors shall be formatted according to the rules specified in 13.1 and the underlying subclauses, 13.2, 13.4, 13.5 and 13.6, whereby the Main Data bytes and the PI and PO bytes (see 13.3) can be chosen freely.

1 024 Physical Sectors have been reserved for this “bitmap” purpose, allowing to divide the disc into maximum 256 regions. The Recorded Area Indicators shall be used from the outer side of the TOC Zone towards the inner side of the TOC Zone (see Figure 24). By means of an “HF-detection” the recorder can find the locations of the Recorded Area Indicators and determine the regions which contain recorded ECC Blocks.

Whenever the disc is ejected from a drive supporting this option, the Recorded Area Indicators shall reflect the actual status of the recordings on the disc.

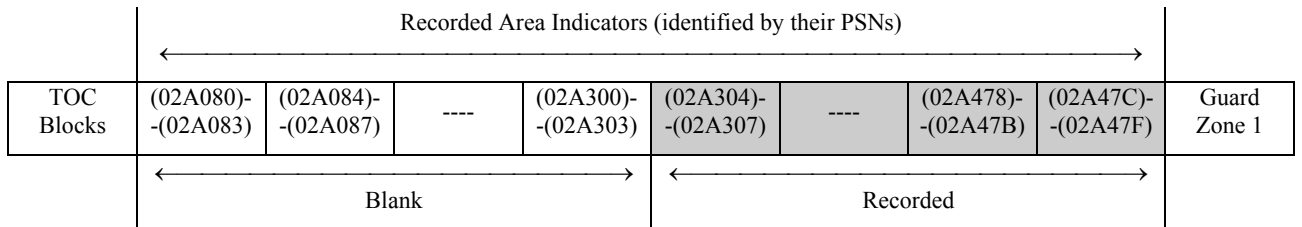


Figure 24 – Use of Recorded Area Indicators

Each region of 640 ECC Blocks between PSN = (030000) and PSN = (26053F) corresponds to one Recorded Area Indicator. All regions that contain one or more recorded ECC Blocks shall be indicated by their Recorded Area Indicator. In mathematical form:

if the Recorded Area Indicator composed of the Physical Sectors with PSN_{RAI} to PSN_{RAI} + 3 has been recorded, then the region between:

PSN = {(02A47C)-(PSN_{RAI})} × (A00) + (030000) and PSN = {(02A47C)-(PSN_{RAI})} × (A00) + (0327FF)

contains recorded ECC Blocks,

or in decimal notation:

PSN = {173180-PSN_{RAI}} × 2560 + 196608 and PSN = {173180-PSN_{RAI}} × 2560 + 206847.

18 Lead-in Zone

The Lead-in Zone is located at the inner side of the Information Zone. It shall consist of the parts shown in Figure 25.

The Physical Sector Number of the first and last Physical Sector of each part is indicated in Figure 25 in hexadecimal and decimal notation and the number of Physical Sectors in each part are indicated in decimal notation.

A maiden disc does not have any data recorded in the Lead-in Zone. After finalization of the disc or closing of the first Session, the Lead-in Zone shall be recorded according to 18.1 to 18.9.

18.1 Guard Zone 1

This Guard Zone is used to create a minimum amount of Lead-in Zone required for compatibility. This zone shall contain 14 848 Physical Sectors, all filled with Main Data set to (00).

18.2 Reserved Zone 1

4 096 Physical Sectors are reserved and shall be set to (00).

18.3 Reserved Zone 2

64 Physical Sectors are reserved and shall be set to (00).

Inner Drive Area		
Physical Sector 173 184	Guard Zone 1 14 848 Physical Sectors with Main Data set to (00)	Physical Sector (02A480)
Physical Sector 188 031 Physical Sector 188 032	Reserved Zone 1 4 096 Physical Sectors	Physical Sector (02DE7F) Physical Sector (02DE80)
Physical Sector 192 127 Physical Sector 192 128	Reserved Zone 2 64 Physical Sectors	Physical Sector (02EE7F) Physical Sector (02EE80)
Physical Sector 192 191 Physical Sector 192 192	Inner Disc Identification Zone 256 Physical Sectors	Physical Sector (02EEBF) Physical Sector (02EEC0)
Physical Sector 192 447 Physical Sector 192 448	Reserved Zone 3 64 Physical Sectors	Physical Sector (02EFBF) Physical Sector (02EFC0)
Physical Sector 192 511 Physical Sector 192 512	Reference Code Zone 32 Physical Sectors	Physical Sector (02EFFF) Physical Sector (02F000)
Physical Sector 192 543 Physical Sector 192 544	Buffer Zone 1 480 Physical Sectors with Main Data set to (00)	Physical Sector (02F01F) Physical Sector (02F020)
Physical Sector 193 023 Physical Sector 193 024	Control Data Zone 3 072 Physical Sectors	Physical Sector (02F1FF) Physical Sector (02F200)
Physical Sector 196 095 Physical Sector 196 096	Buffer Zone 2 512 Physical Sectors	Physical Sector (02FDFF) Physical Sector (02FE00)
Physical Sector 196 607	Data Zone	Physical Sector (02FFFF)

Figure 25 - Lead-in Zone

18.4 Inner Disc Identification Zone

256 Physical Sectors reserved for information agreed upon by the data interchange parties. Each set of 16 Physical Sectors from one ECC Block is either a Disc Control Block (DCB) (see clause 25) or recorded with all (00) Main Data. Each ECC Block in this Zone following one recorded with all (00) Main Data shall also be recorded with all (00) Main Data.

18.5 Reserved Zone 3

64 Physical Sectors are reserved and shall be set to (00).

18.6 Reference Code Zone

The recorded Reference Code Zone shall consist of the 32 Physical Sectors from two ECC Blocks which generate a specific Channel bit pattern on the disc. This shall be achieved by setting to (AC) all 2 048 Main Data bytes of each corresponding Data Frame. Moreover, no scrambling shall be applied to these Data Frames, except to the first 160 Main Data bytes of the first Data Frame of each ECC Block.

18.7 Buffer Zone 1

This Zone shall consist of 480 Physical Sectors from 30 ECC Blocks. The Main Data of the Data Frames in this Zone shall be set to all (00).

18.8 Control Data Zone

This Zone shall consist of 3 072 Physical Sectors from 192 ECC Blocks. The content of the 16 Physical Sectors of each ECC Block is repeated 192 times. The structure of a Control Data Block shall be as shown in Figure 26.

Physical format information 2 048 bytes
Disc manufacturing information 2 048 bytes
Content provider information 14 × 2 048 bytes

Figure 26 - Structure of a Control Data Block

18.8.1 Physical format information

This information shall comprise the 2 048 bytes shown in Table 11. It contains disc and format information.

Table 11 - Physical format information

Byte number	Content	Number of bytes
0	Disc Category and Version Number	1
1	Disc size	1
2	Disc structure	1
3	Recording density	1
4 to 15	Data Zone allocation	12
16	General Flag bits	1
17	Disc Application Code	1
18	Extended Information indicators	1
19 to 26	Disc Manufacturer ID	8
27 to 29	Media Type ID	3
30	Product revision number	1
31	number of Physical format information bytes in use in ADIP up to byte 63	1
32 to 63	Basic write strategy parameters	32
64 to 95	Extended Information block 0	32
96 to 127	Extended Information block 1	32
128 to 159	Extended Information block 2	32
160 to 191	Extended Information block 3	32
192 to 223	Extended Information block 4	32
224 to 247	Extended Information block 5	24
248 to 251	Start of Session	4
252 to 255	End of Session	4
256 to 2 047	Reserved – All (00)	1 792

The information in bytes 0 to 255 have the same definitions and shall have the same contents as the Physical format information in ADIP defined in Table 3 and 14.4.2, except the following bytes:

Byte 0 - Disc Category and Version Number

Bits b₇ to b₄ same as 14.4.2

Bits b₃ to b₀ same as 14.4.2

Temporarily drives can set bits b₇ to b₀ to other values in order to increase the compatibility.

Byte 1 - Disc size and maximum transfer rate

Bits b₇ to b₄ same as 14.4.2

Bits b₃ to b₀ shall specify the maximum read transfer rate.

These bits may be set to one of the following values (depending on the maximum read-out speed needed by the application):

0000: specify a maximum transfer rate of 2,52 Mbits/s (See note at 30.3)

0001: specify a maximum transfer rate of 5,04 Mbits/s (See note at 30.3)

0010: specify a maximum transfer rate of 10,08 Mbits/s

1111: specify no maximum transfer rate is specified.

All other combinations are reserved and shall not be used.

Bytes 4 to 15 - Data Zone allocation

Bytes 4 to 8 same as 14.4.2

Bytes 9 to 11 on a finalized Single Session disc (see 23.3):

shall specify the Sector Number of the last Physical Sector of the Data Zone.

on a Multi-session disc (see clause 22):

shall be set to (26053F) to specify PSN 2 491 711 as the last possible Physical Sector on the disc for the storage of User Data (for 80 mm disc see Annex A).

Bytes 12 to 15 same as 14.4.2

Byte 16 – General Flag bits

Bit b₇ same as 14.4.2

Bit b₆ same as 14.4.2

Bit b₅ shall specify if Buffer Zone 2 in the Lead-in Zone contains VCPS related information,
shall be set to 0, indicating no VCPS related information is present in Buffer Zone 2,
shall be set to 1, indicating Buffer Zone 2 contains VCPS related information as defined in the VCPS System Description (see clause 3).

Bits b₄ to b₀ same as 14.4.2

Note: When closing the first Session, drives not designed to handle VCPS might set bit b₅ = 0 even when Buffer Zone 2 contains VCPS related information (recorded before by some other drive).

Bytes 248 to 251 – Start of first Session

Byte 248 shall be set to (00).

Bytes 249 to 251 shall be set to (030000) to specify PSN 196 608 of the first Physical Sector of the Data Zone of the first Session (see clause 22).

Bytes 252 to 255 – End of first Session

Byte 252 shall be set to (00).

Bytes 253 to 255 shall specify the Sector Number of the last Physical Sector of the Data Zone of the first Session (see clause 22).

Bytes 256 to 2 047 - Reserved - All (00)

These remaining bytes have no relation to the ADIP information and shall be set to all (00).

18.8.2 Disc manufacturing information

This System Description does not specify the format and the content of these 2 048 bytes. They shall be ignored in interchange.

18.8.3 Content provider information

These 28 672 bytes shall be set to all (00).

Under no circumstance may data received from the host be recorded in this field.

Circumvention: Recorders and recording drives shall be considered as circumvention devices when these are produced to record, or can easily be modified to record, in any manner, a user-defined number in this field.

18.9 Buffer Zone 2

This recorded Zone shall consist of 512 Physical Sectors from 32 ECC Blocks. During use of the disc VCPS related information may be recorded to these 32 ECC Blocks, according to the specifications given in the VCPS System Description (see clause 3). Such VCPS related information shall only be recorded when requested by the host/application. If no VCPS related information is copied to these locations then the Main Data of the Data Frames in this Zone shall be set to all (00).

Whenever Buffer Zone 2 has been recorded, also the first ECC Block of the Data Zone shall be recorded.

19 Data Zone

2 295 104 Physical Sectors for the storage of user data (for 80 mm disc see Annex A).

The start radius of the Data Zone is determined by the location of Physical ADIP Address (00C000) and the maximum end radius is determined by the location of Physical ADIP Address (098150) (see 14.4.1.1, bit 2 to 23 and 13.7.1)

20 Lead-out Zone

The Lead-out Zone is located at the outer side of the Information Zone. It shall consist of the parts specified in Figure 27. The Physical Sector Number of the first and the last Physical Sector of each part is indicated in Figure 27 in hexadecimal and decimal notation and the number of Physical Sectors in each part is indicated in decimal notation (for 80 mm disc see Annex A).

Data Zone		
Physical Sector 2 491 712 max	Buffer Zone 3 768 Physical Sectors with Main Data set to (00)	Physical Sector (260540) max
Physical Sector 2 492 479 max Physical Sector 2 492 480 max	Outer Disc Identification Zone 256 Physical Sectors	Physical Sector (26083F) max Physical Sector (260840) max
Physical Sector 2 492 735 max Physical Sector 2 492 736 max	Guard Zone 2 min 4 096 Physical Sectors with Main Data set to (00) (remaining sectors are allowed to be unrecorded)	Physical Sector (26093F) max Physical Sector (260940) max
Physical Sector 2 496 831		Physical Sector (26193F)
	Outer Drive Area	

Figure 27 - Lead-out Zone

20.1 Buffer Zone 3

This recorded Zone shall consist of 768 Physical Sectors. The last possible start location of Buffer Zone 3 is (260540) (for 80 mm disc see Annex A). The Main Data of the Data Frames in this Zone shall be set to all (00).

20.2 Outer Disc Identification Zone

256 Physical Sectors reserved for information agreed upon by the data interchange parties. Each set of 16 Physical Sectors from one ECC Block is either a Disc Control Block (DCB) (see clause 25) or recorded with all (00) Main Data. The contents of this Zone shall be equivalent to the contents of the last Inner Session Identification Zone (or to the contents of the Inner Disc Identification Zone in case of a Single-session disc).

20.3 Guard Zone 2

This Guard Zone is used as a protection for separating test writing zones from information zones containing user data. This zone shall contain a minimum of 4 096 Physical Sectors filled with Main Data set to (00).

If the total storage capacity of the disc is not fully used, the Guard Zone 2 can be extended with Physical Sectors filled with Main Data set to (00) to fill up the gap up to a certain radius or up to the Outer Drive Area, or this gap can be left unrecorded. The choice for these options is left to the drive manufacturer.

21 Outer Drive Area

The Outer Drive Area is the outermost zone of the disc which is used by the drive for performing disc tests and OPC algorithms. It shall consist of the parts shown in Figure 28. The Physical Sector Number of the first and last Physical Sector of each part is indicated in Figure 28 in hexadecimal and decimal notation and the number of Physical Sectors in each part are indicated in decimal notation (for 80 mm disc see Annex A).

Lead-out Zone		
Physical Sector 2 496 832	Outer Disc Administration Zone 4 096 Physical Sectors	Physical Sector (261940)
Physical Sector 2 500 927	Outer Disc Count Zone 4 096 Physical Sectors	Physical Sector (26293F)
Physical Sector 2 500 928		Physical Sector (262940)
Physical Sector 2 505 023	Outer Disc Test Zone 16 384 Physical Sectors	Physical Sector (26393F)
Physical Sector 2 505 024		Physical Sector (263940)
Physical Sector 2 521 407	Guard Zone 3 Blank	Physical Sector (26793F)
Physical Sector 2 521 408		Physical Sector (267940)

Figure 28 – Outer Drive Area

21.1 Outer Disc Administration Zone

4 096 Physical Sectors to be used for optional drive specific information. The first 16 physical sectors of this Zone shall be filled with all Main Data set to (00). This zone can be used in the same way as the Inner Disc Administration Zone (see 17.5).

21.2 Outer Disc Count Zone

4 096 Physical Sectors reserved for counting the number of OPC algorithms performed in the Outer Disc Test Zone (see Annex I).

Whenever an ECC Block or part of it in the Outer Disc Test Zone has been recorded, the ECC Block shall be flagged by recording 4 Physical Sectors in the Outer Disc Count Zone. These 4 Physical Sectors shall be formatted according to the rules specified in 13.1 and the underlying subclauses, 13.2, 13.4, 13.5 and 13.6, whereby the Main Data bytes and the PI and PO bytes (see 13.3) can be chosen freely.

The relation between the first Physical Sector number PSN_{ODT} of the used ECC Block in the Outer Disc Test Zone and the Physical Sector numbers PSN_{ODC} to $PSN_{ODC} + 3$ of the 4 Physical Sectors in the Outer Disc Count Zone is determined by the following mathematical expression (for 80 mm disc see Annex A):

$$PSN_{ODC} = \{(PSN_{ODT}) - (263940)\} / (04) + (262940)$$

21.3 Outer Disc Test Zone

16 384 Physical Sectors reserved for drive testing and OPC algorithms (see Annex I). The order in which these Physical Sectors shall be used is from the outer side of the disc towards the inner side of the disc, so from the highest address towards the lowest address.

21.4 Guard Zone 3

This Zone shall remain blank.

22 Multi-session Layout

To enable data retrieval by DVD - Read-Only devices, the disc should have a Lead-in Zone, no blank areas in the Data Zone, and some form of Lead-out Zone. However one also wants to have the ability to append additional data to a partially recorded disc. For this purpose the following Multi-session concept is specified.

On a Multi-session disc there can exist more than one session. A session with an Intro and a Closure is called a Closed Session. The first Session shall be preceded by a Lead-in Zone instead of an Intro Zone, the final Session shall be followed by a Lead-out Zone instead of a Closure Zone. Once a Lead-out Zone has been recorded, the disc is called “finalized” and no additional recordings to the disc shall be allowed.

The general layout of a Multi-session disc is shown in Table 12.

Table 12 - Layout of the Information Zone of a Multi-session disc

Session	Zone	Description		Number of Physical Sectors	
	Inner Drive Area	--		--	
Session 1	<u>Lead-in</u>	...	See clause 18	...	
		Reserved Zone 2		64	
		Inner Disc Identification Zone		256	
		
		Control Data Zone		3 072	
		Buffer Zone 2		512	
	<u>Data</u>	Data Zone			min 16
	<u>Closure</u>	Buffer Zone C	See 22.3	768	
		Outer Session Identification Zone		256	
Session 2	<u>Intro</u>	Buffer Zone A	See 22.1	64	
		Inner Session Identification Zone		256	
		Session Control Data Zone		640	
		Buffer Zone B		64	
	<u>Data</u>	Data Zone			min 16
	<u>Closure</u>	Buffer Zone C	See 22.3	768	
		Outer Session Identification Zone		256	
•	•	•		...	
•	•	•		...	
Session N (N ≤ 191)	<u>Intro</u>	...	See 22.1	...	
	<u>Data</u>	Data Zone			min 16
	<u>Lead-out</u>	Buffer Zone 3	See clause 20	768	
		Outer Disc Identification Zone		256	
		
	Outer Drive Area	--		--	

A session with a partially recorded Lead-in or Intro Zone and no Lead-out or Closure Zone is called an Open Session. All sessions must be Closed Sessions, except for the last one, which is allowed to be an Open Session. User Data can only be appended to an Open Session. If all session are closed, a new Open Session has to be created first (see 23.1).

The first Closed Session on the disc shall have a Lead-in that complies with clause 18. Subsequent Closed Sessions shall have a Intro as defined in 22.1. Every Closed Session shall have a Closure as defined in 22.3, except for the Final Session, which shall have a Lead-out as defined in clause 20.

22.1 Intro

Each new Session that occurs after the first Session, shall start with an Intro Zone consisting of a Buffer Zone A, an Inner Session Identification Zone, a Session Control Data Zone and a Buffer Zone B.

All Physical Sectors in the Intro Zone shall have bits b_{27} to b_{26} of the Data Frame set to ZERO ZERO, identifying the Intro Zone as if it was a Data Zone (see 13.1.1).

22.1.1 Buffer Zone A

64 Physical Sectors are reserved and shall be set to (00).

22.1.2 Inner Session Identification Zone

256 Physical Sectors reserved to store information about the Sessions. Each set of 16 Physical Sectors from one ECC Block is either a Disc Control Block (DCB) (see clause 25) or recorded with all (00) Main Data. Each ECC Block in this Zone following one recorded with all (00) Main Data shall also be recorded with all (00) Main Data.

22.1.3 Session Control Data Zone

This Zone shall consist of 640 Physical Sectors from 40 ECC Blocks. The content of the 16 Physical Sectors of each ECC Block is repeated 40 times. The structure of a Control Data Block shall be as shown in Figure 26.

22.1.4 Buffer Zone B

64 Physical Sectors are reserved and shall be set to (00).

22.2 Data Zone

Each Data Zone shall consist of a multiple of 16 Physical Sectors, with a minimum of 16. The first Data Zone shall start at PSN (030000). If needed (e.g. for filling up the last ECC Block or for facilitating compatibility with certain DVD – Read-Only drives that require the disc to be recorded up till a certain radius) a Data Zone can be padded with Data Frames containing all (00) Main Data.

22.3 Closure

Each Session shall end with a Closure Zone consisting of two parts; a Buffer Zone C and an Outer Session Identification Zone.

All Physical Sectors in the Closure Zone shall have bits b_{27} to b_{26} of the Data Frame set to ZERO ZERO, identifying the Closure Zone as if it was a Data Zone (see 13.1.1).

22.3.1 Buffer Zone C

768 Physical Sectors are reserved and shall be set to (00).

22.3.2 Outer Session Identification Zone

Each set of 16 Physical Sectors from one ECC Block is either a Disc Control Block (DCB) (see clause 25) or recorded with all (00) Main Data. The contents of this Zone shall be equivalent to the contents of the Inner Identification Zone of the same Session.

23 Sequential recording in Fragments

DVD+R discs according to this document in principle have to be recorded sequentially. To facilitate the recording of specific data at some pre-determined location on the disc at a later moment in time (such as for instance File System information), a Session can be divided into a number of Fragments. Inside such a Fragment the User Data shall be recorded sequentially from the inner side of the disc towards the outer side of the disc

23.1 Opening a Session

New data can be added to the disc by appending to an Open Session. If there is no Open Session, a new Session has to be opened (see Table 13).

A new Session is opened by recording Buffer Zone A plus an SDCB (Session Disc Control Block: see 25.2) in the first ECC Block of the Inner Session Identification Zone (or by recording Reserved Zone 2 plus an SDCB in the first ECC Block of the Inner Disc Identification Zone in case of the first Session on a blank disc).

Once the first ECC Block of the Data Zone is recorded, also Buffer Zone B of the Intro (or Buffer Zone 2 of the Lead-in Zone in case of the first Session) shall be recorded.

Table 13 – Details of opened Session n (example)

<i>Session n-1</i>	<u>Data</u>	Data Zone	User Data
	<u>Closure</u>	Buffer Zone C	48 ECC Blocks with (00)
		Outer Session Identification Zone	16 ECC Blocks with DCBs and/or (00)
<i>Session n</i>	<u>Intro</u>	Buffer Zone A	4 ECC Blocks with (00)
		Inner Session Identification Zone	1 ECC Block with an SDCB
			blank
		Session Control Data Zone	blank
		Buffer Zone B	4 ECC Blocks with (00)
	<u>Data</u>	Data Zone	Reserved Fragment (optional)
			1 ECC Block for Run-in
			Incomplete Fragment with User Data
			blank

23.1.1 Incomplete Fragment

When no Reserved Fragments (see 23.1.2) are created, all the remaining area of the Data Zone following Buffer Zone B is called the Incomplete Fragment. In the presence of Reserved Fragments, all the remaining area of the Data Zone following the last Reserved Fragment is called the Incomplete Fragment.

Until the Incomplete Fragment is closed (see 23.1.4), there shall be no Fragment item (see 25.2.1) for the Incomplete Fragment in any SDCB.

23.1.2 Reserved Fragments

To allow for later on adding data, preceding already recorded User Data (such as for instance File System information), it is possible to create so-called Reserved Fragments. All Reserved Fragments in the Open Session shall be contiguous and non-overlapping, while the first Fragment shall start immediately after the end of Buffer Zone B.

Between any 2 Fragments there shall be 1 ECC Block for Run-in purposes. This ECC Block does not belong to any of the Fragments, and shall be recorded after the end of Reserved Fragment i at the same time the first ECC Block of Fragment (i+1) is recorded. (see Figure 29)

23.1.2.1 Adding a Reserved Fragment

If a new Reserved Fragment is defined, this Fragment shall start from the beginning of the Incomplete Fragment and at least include all data that have already been written to the Incomplete Fragment. The newly defined Reserved Fragment shall be Fragment $n+1$, where n is the number of the previously last (Reserved) Fragment. A new SDCB shall be recorded in the Identification Zone of the Session including a new Fragment item indicating the start and end addresses of the added Reserved Fragment (see 25.2.1).

Reserved Fragments can only be added as long as the number of free locations for SDCBs in the Inner Identification Zone of the current Session is larger than one. The last free location for an SDCB has to be preserved for closing the Session.

The area following the newly defined Reserved Fragment is designated to be the new Incomplete Fragment ($n+2$).

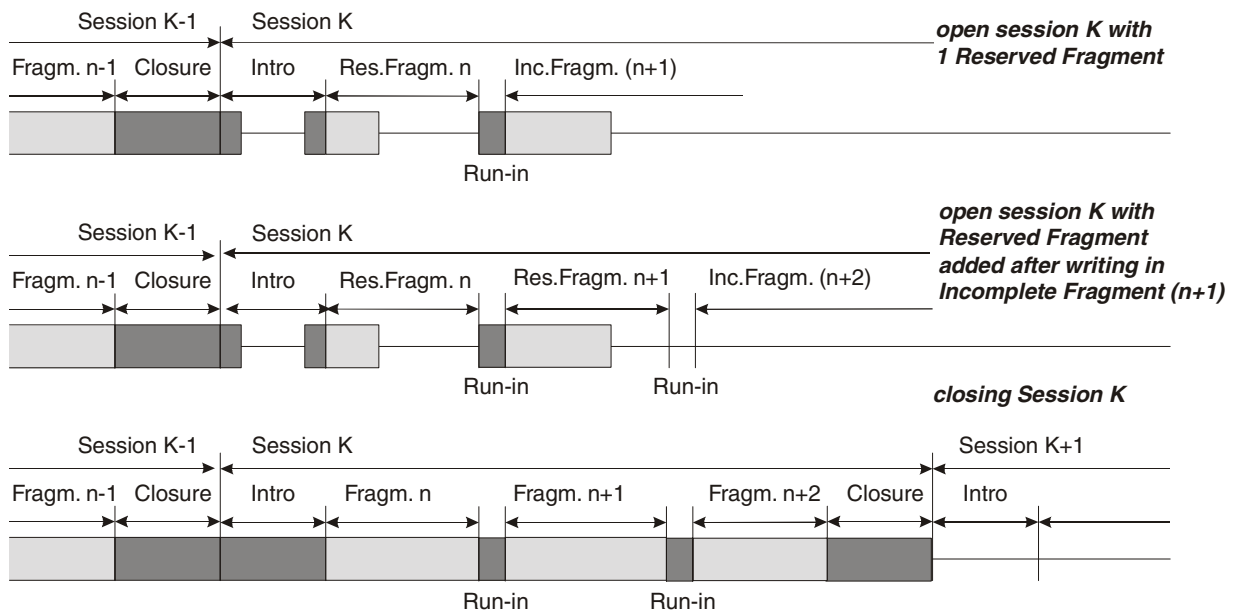


Figure 29 – Creating Reserved Fragments

23.1.3 Recording User Data in Fragments

User Data added to the Data Zone shall be linked immediately to previously written User Data in the Incomplete Fragment or to previously written data in one of the Reserved Fragments.

23.1.4 Closing a Fragment

When a Reserved Fragment is closed, all blank areas in the Fragment shall be recorded with dummy data.

When the Incomplete Fragment is closed, a new SDCB shall be recorded in the Identification Zone of the Session including a new Fragment item indicating the start and end addresses of the (formerly) Incomplete Fragment (see 25.2). This formerly Incomplete Fragment shall not have unrecorded areas.

The area after the formerly Incomplete Fragment can be designated as the new Incomplete Fragment is case more User Data has to be added. For consistency reasons a Run-in Block shall be taken into account between the new Incomplete Fragment and the formerly Incomplete Fragment.

23.2 Closing a Session

To enable data retrieval from a Session by DVD – Read-Only devices, this Session and all preceding ones should be closed. A Session is closed by recording all blank areas in all Fragments with dummy data and recording all remaining parts in the Lead-in or Intro Zone and adding the Closure Zone.

When a Session is closed, the Incomplete Fragment is closed and shall be designated as Fragment $m+1$, where m is the number of the last (Reserved) Fragment preceding the Incomplete Fragment. (see Figure 29)

The numbering of the Fragments shall be continuous over all Sessions. (see Figure 29)

When the Session to be closed is the 191st Session, then the disc shall be finalized, instead of closing the Session (see 23.3).

Also when the remaining free space on the disc after closing the Session will become less than 128 ECC Blocks (2048 Physical Sectors), the disc shall be finalized, instead of closing the Session (see 23.3).

23.2.1 Lead-in/Intro Zone

The SDCB shall be updated, including the Incomplete Fragment as the last Fragment ($n+2$ in the example of Figure 29). In case multiple SDCBs have been recorded, the last written SDCB is the valid one.

In the Lead-in Zone the Control Data Zone shall be according to 18.8.

In each Intro the Session Control Data Zone shall be recorded with 40 ECC Blocks according to the format specified in 18.8 with the following settings:

Physical Format Information:

Bytes 0 to 247 - same as in 18.8.1

These bytes contain a copy of the Physical format information.

Bytes 248 to 251 – Start of current Session

Byte 248 shall be set to (00).

Bytes 249 to 251 shall specify the Sector Number of the first Physical Sector of the Data Zone of the current Session (see clause 22).

Bytes 252 to 255 – End of current Session

Byte 252 shall be set to (00).

Bytes 253 to 255 shall specify the Sector Number of the last Physical Sector of the Data Zone of the current Session (see clause 22).

Bytes 256 to 2 047 - Reserved - All (00)

These remaining bytes have no relation to the ADIP information and shall be set to all (00).

Disc manufacturing information: see 18.8.2

Content provider information: see 18.8.3

23.2.2 Closure Zone

At closing a Session, Buffer Zone C shall be recorded together with the Outer Session Identification Zone.

23.3 Finalizing the disc

When the disc is being finalized, a Lead-out Zone according to clause 20 shall be recorded instead of a Closure Zone. After finalizing the disc, adding data is no longer possible. The Session Status in the TOC Item describing the last Session shall be set accordingly (see 17.6.1.1: TOC Item, byte B_3).

24 Assignment of Logical Sector Numbers (LSNs)

Logical Sector Numbers (LSN) shall be assigned contiguously increasing by one from LSN 0, starting from the first PSN of the first Data Zone to the end of the last Data Zone. The relation between LSN and PSN shall be: $LSN = PSN - (030000)$.

25 Disc Control Blocks

Disc Control ECC Blocks are provided as a structure on the disc to include additional information for interchange between the data interchange parties. DCBs are recorded in the Inner and Outer Identification Zones of the disc and the Sessions. All DCBs shall have the same format for the first 40 data bytes. A special DCB is defined to reflect the status of the Session(s).

25.1 General format of Disc Control Blocks

The Main Data of each Disc Control Block shall be according to Table 14.

If a Disc Control Block has to be updated, a substitute DCB shall be written immediately following the last written DCB in the Inner Disc/Session Identification Zone. If more than one DCB with the same Content Descriptor are present, then the one with the highest address is the only valid one of that type. Once a Session has been closed, the DCBs of that Session can no longer be updated.

Table 14 – General format of each Disc Control Block

Physical Sector of each DCB	Main Data BP	Description
0	D ₀ to D ₃	Content Descriptor
0	D ₄ to D ₇	Unknown Content Descriptor Actions
0	D ₈ to D ₃₉	Drive ID
0	D ₄₀ to D _{2 047}	Content Descriptor Specific
1 to 15	D ₀ - D _{2 047}	Content Descriptor Specific

Bytes D₀ to D₃ - Content Descriptor

if set to (00000000)

the DCB is unused.

The Content Descriptor of all subsequent DCBs in this Inner or Outer Identification Zone shall be set to (00000000).

All remaining bytes, D₄ to D_{2 047} of Physical Sector 0 and D₀ to D_{2 047} of Physical Sector 1 to 15 in Table 14 shall be set to (00).

if set to (53444300)

this DCB shall be as defined in 25.2

All other values for the Content Descriptor are reserved.

Each new DCB added to the Inner or the Outer Identification Zone shall be written at the first available unwritten DCB location.

Each prevailing DCB with a Content Descriptor not set to (00000000) in the Inner Identification Zone of a Session shall have an identical DCB in the Outer Identification Zone of the respective Session (DCBs that have been substituted need not to be present in the Outer Identification Zone).

Bytes D₄ to D₇ - Unknown Content Descriptor Actions

These bits are provided to specify required actions when the content and use of the DCB are unknown to the drive (i.e. the content descriptor is not set to a known assigned value). These bytes form a field consisting of 32 individual bits.

Bits b ₃₁ to b ₄	Reserved These bits shall be set to all ZERO.
Bit b ₃	DCB rewrite if set to ONE, substituting the current DCB shall not be allowed, else it shall be set to ZERO.
Bit b ₂	Formatting shall be set to ONE, indicating that reformatting of the disc is not possible.
Bit b ₁	DCB read protect if set to ONE, the information in this DCB is meant for use by the drive only and shall not be transferred outside the drive, else it shall be set ZERO.
Bit b ₀	Data Zone write if set to ONE, recording shall not be allowed in the Data Zone, else it shall be set to ZERO.

Bytes D₈ to D₃₉ Drive ID

Bytes D₈ to D₃₉ shall contain a unique descriptor, identifying the drive that has written the DCB. The format of this unique drive identifier shall be as follows:

- Bytes D₈ to D₂₃ shall identify the manufacturer of the drive. This name shall be represented by characters from the G0 set + SPACE according to ECMA-43. Trailing bytes not used shall be set to (00).
- Bytes D₂₄ to D₃₅ shall identify the model name/type number of the drive. This model name/type number shall be represented by characters from the G0 set + SPACE according to ECMA-43. Trailing bytes not used shall be set to (00).
- Bytes D₃₆ to D₃₉ shall contain a unique serial number of the drive. The 4 bytes shall form one 32-bit binary number.

Bytes D₄₀ to D_{2 047} Content Descriptor Specific

Bytes specified by the format description for the DCB with the actual Content Descriptor value.

Physical Sectors 1 to 15: Bytes D₀ to D_{2 047} Content Descriptor Specific

Bytes specified by the format description for the DCB with the actual Content Descriptor value.

25.2 Format of the Session DCB (SDCB)

The Lead-in or Intro Zone of an Open Session shall contain an SDCB describing the structure of the Open Session and the location of all previous Sessions. When the Session is closed, the SDCB in the Inner Identification Zone shall be updated and a copy shall be written to the Outer Identification Zone. The SDCB's shall have the content as defined in Table 15.

Table 15 - Format of the SDCB

Physical Sector of ECC block	Main Data byte position	Description	number of bytes
0	D ₀ to D ₃	Content Descriptor	4
0	D ₄ to D ₇	Unknown Content Descriptor Actions	4
0	D ₈ to D ₃₉	Drive ID	32
0	D ₄₀ to D ₄₁	Session number	2
0	D ₄₂ to D ₆₃	Reserved and set to (00)	22
0	D ₆₄ to D ₉₅	Disc ID (in Lead-in Zone only)	32
0	D ₉₆ to D ₁₂₇	Application Dependent	32
0	D ₁₂₈ to D ₁₄₃	Session Item 0	16
0	
0	D _{128+i×16} to D _{143+i×16}	Session Item i	16
0	
0	D _{128+(N-1)×16} to D _{143+(N-1)×16}	Session Item N-1	16
0	D _{128+N×16} to D _{2 047}	Reserved and set to (00)	1 920 - N×16
1 to 3	D ₀ to D _{2 047}	Extension for Session Items or Reserved and set to (00)	3×2 048
4 to 7	D ₀ to D _{2 047}	Repetition of Sectors 0 to 3 (recommended) or Reserved and set to (00)	4×2 048
8 to 11	D ₀ to D _{2 047}	Repetition of Sectors 0 to 3 (recommended) or Reserved and set to (00)	4×2 048
12 to 15	D ₀ to D _{2 047}	Repetition of Sectors 0 to 3 (recommended) or Reserved and set to (00)	4×2 048

Physical Sector 0 / bytes D₀ to D₃ – Content Descriptor

these bytes identify the Session DCB and shall be set to (53444300), representing the characters “SDC” and the version number 0.

Physical Sector 0 / bytes D₄ to D₇ – Unknown Content Descriptor Actions

shall be set to (0000000D) indicating that if this DCB is not known to the system, the DCB shall not be substituted, the disc can not be reformatted, writing to the Data Zone shall not be allowed, while transferring the DCB information from the drive to the host computer is allowed.

Physical Sector 0 / bytes D₈ to D₃₉ – Drive ID

these bytes shall contain the drive ID as specified in 25.1, bytes D₈ to D₃₉.

Physical Sector 0 / bytes D₄₀ to D₄₁ – Session number

these bytes shall specify the sequence number of the Session to which the SDCB belongs. The first Session shall have sequence number 1 and each subsequent Session number shall be incremented by one.

Physical Sector 0 / bytes D₄₂ to D₆₃ – Reserved

these bytes are reserved and shall be set to (00)

Physical Sector 0 / bytes D₆₄ to D₉₅ – Disc ID

In the SDCB in the Inner Disc Identification Zone in the Lead-in Zone of the disc, these 32 bytes shall be recorded with a random, statistically unique, 256-bit binary number at initialization of the disc (opening of the first Session). In the SDCB in the Inner Session Identification Zone in the Intro of each next Session, bytes D₆₄ to D₉₅ shall be set to all (00).

Physical Sector 0 / bytes D₉₆ to D₁₂₇ – Application dependent

this field shall consist of 32 bytes and is reserved for use by the application to store information such as specific copy protection data. If this setting is not specified by the application, the bytes shall be set to (00). In each Session these bytes may be set independently.

Physical Sector 0 / bytes D₁₂₈ to D_{2 047} – Session Items

these bytes are grouped in units of 16 bytes each. Each unit of 16 bytes may contain one of two different types of Session Items:

- type 1: specifies the Fragments in the current Session,
- type 2: specifies the start and end addresses of all previous Sessions.

All Session Items shall be ordered in the SDCB according to their type number (first type 1, then type 2). All bytes not containing Session Items shall be set to (00).

Physical Sectors 1 to 3 / bytes D₀ to D_{2 047} – Extension for Session Items or Reserved

these bytes may hold additional Session Items.

All bytes not containing Session Items shall be set to (00).

Physical Sectors 4 to 15 / bytes D₀ to D_{2 047} – Repetitions of Sectors 0 to 3 or all Reserved

For robustness reasons it is recommended to repeat the content of Sectors 0 to 3 in Sectors 4 to 7, in Sectors 8 to 11 and in Sectors 12 to 15. If this option is not used, these bytes shall be set to (00).

It is a matter of drive implementation to recognize and make use of the repetitions.

25.2.1 Session Items

25.2.1.1 type 1: Fragment item

Item byte position	Description	number of bytes
B ₀ to B ₂	Fragment item descriptor	3
B ₃ to B ₄	Fragment number	2
B ₅ to B ₇	Fragment start address	3
B ₈ to B ₁₀	Fragment end address	3
B ₁₁ to B ₁₅	Reserved and set to (00)	5

An SDCB shall contain a Fragment item for each Reserved Fragment in the Session. If there are no Reserved Fragments, there shall be no Fragment items.

If a new Reserved Fragment has to be added to an Open Session, a new SDCB, including the Fragment items needed to reflect the new situation, is written in the Inner Identification Zone of the current Session, immediately following the last SDCB. Reserved Fragments in a Session shall not be overlapping.

When closing a Session, a new SDCB, including a Fragment item for the Incomplete Fragment, is written in the Inner Identification Zone of the current Session, immediately following the last SDCB.

The Fragment items shall be ordered with increasing numbers and addresses. The last written SDCB in the Inner Identification Zone is the valid SDCB.

Fragment item bytes B₀ to B₂ – Fragment item descriptor

these 3 bytes identify the item type and shall be set to (465247), representing the characters “FRG”.

Fragment item bytes B₃ to B₄ – Fragment number

these 2 bytes shall specify the sequence number of the Fragment. The numbers of the Fragments shall be contiguous over all Sessions and increment by one for each subsequent Fragment. The first Fragment in the first Session shall have sequence number 1 and the first Fragment in each next Session shall have a sequence number that is one higher than the number of the last Fragment in the preceding Session.

Fragment item bytes B₅ to B₇ – Fragment start address

these 3 bytes shall specify the PSN of the first Physical Sector belonging to the Fragment specified in this item.

Fragment item bytes B₈ to B₁₀ – Fragment end address

these 3 bytes shall specify the PSN of the last Physical Sector belonging to the Fragment specified in this item.

Fragment item bytes B₁₁ to B₁₅ – Reserved

these 5 bytes are reserved and shall be set to (00).

25.2.1.2 type 2: Previous Session item

Item byte position	Description	number of bytes
B ₀ to B ₂	Previous Session item descriptor	3
B ₃	Reserved and set to (00)	1
B ₄	Previous Session number	1
B ₅ to B ₇	Previous Session start address	3
B ₈ to B ₁₀	Previous Session end address	3
B ₁₁ to B ₁₅	Reserved and set to (00)	5

An SDCB shall contain a Previous Session item for each Session preceding the current Session. The SDCB of the first Session shall not contain a Previous Session item. The Previous Session items shall be ordered with increasing addresses.

Previous Session item bytes B₀ to B₂ – Previous Session item descriptor

these 3 bytes identify the item type and shall be set to (505253), representing the characters “PRS”.

Previous Session item byte B₃ – Reserved

this byte is reserved and shall be set to (00).

Previous Session item byte B₄ – Previous Session number

this byte shall specify the sequence number of the Previous Session specified in this item.

Previous Session item bytes B₅ to B₇ – Previous Session start address

these 3 bytes shall specify the PSN of the first Physical Sector in the Data Zone of the Previous Session specified in this item.

Previous Session item bytes B₈ to B₁₀ – Previous Session end address

these 3 bytes shall specify the PSN of the last Physical Sector in the Data Zone of the Previous Session specified in this item.

Previous Session item bytes B₁₁ to B₁₅ – Reserved

these 5 bytes are reserved and shall be set to (00).

This page is intentionally left blank

Section 5 – Characteristics of the groove

26 General

All recordings shall occur only in grooved areas. The groove centreline is deviated from the average track centreline with a phase modulated sine-wave. Physical addressing information can be decoded from this phase modulated wobble.

The format of the groove information on the disc is defined in 14.4. Clause 28 specifies the requirements for the signals from grooves, as obtained when using the Reference Drive as defined in clause 9.

27 Method of testing

27.1 Environment

All signals in clause 28 shall be within their specified ranges with the disc in the test environment conditions defined in 8.1.1.

27.2 Reference Drive

All signals specified in clause 28 shall be measured in the indicated channels of the Reference Drive as defined in clause 9. The drive shall have the following characteristics for the purpose of these tests.

27.2.1 Optics and mechanics

The focused optical beam shall have the properties defined in 9.2 a) to i). The disc shall rotate as specified in 9.5.

27.2.2 Read power

The optical power incident on the read-out surface of the disc (used for reading the information) shall be $0,7 \text{ mW} \pm 0,1 \text{ mW}$.

27.2.3 Read channels

The drive shall have two read channels. Read Channel 1 gives a signal ($I_1 + I_2$) related to the total amount of light in the exit pupil of the objective lens. Read Channel 2 gives a signal ($I_1 - I_2$) related to the difference in the amount of light in the two halves of the exit pupil of the objective lens. These channels can be implemented as given in clause 9.

For measurement of the push-pull and track cross signals, the read channel signals shall be filtered by a 1st order LPF with a f_c (-3 dB) of 30 kHz.

For measurement of the wobble signal, the read channel signals shall be filtered by a 1st order Band Pass Filter with frequency range (-3 dB): 25 kHz, slope +20 dB/decade to 4,0 MHz, slope -20 dB/decade.

27.2.4 Tracking

During the measurement of the signals, the axial tracking error between the focus of the optical beam and the recording layer shall not exceed $0,20 \text{ }\mu\text{m}$

and the radial tracking error between the focus of the optical beam and the centre of a track shall not exceed $0,022 \text{ }\mu\text{m}$

27.3 Definition of signals

All signals are linearly related to currents through a photo detector, and are therefore linearly related to the optical power falling on the detector.

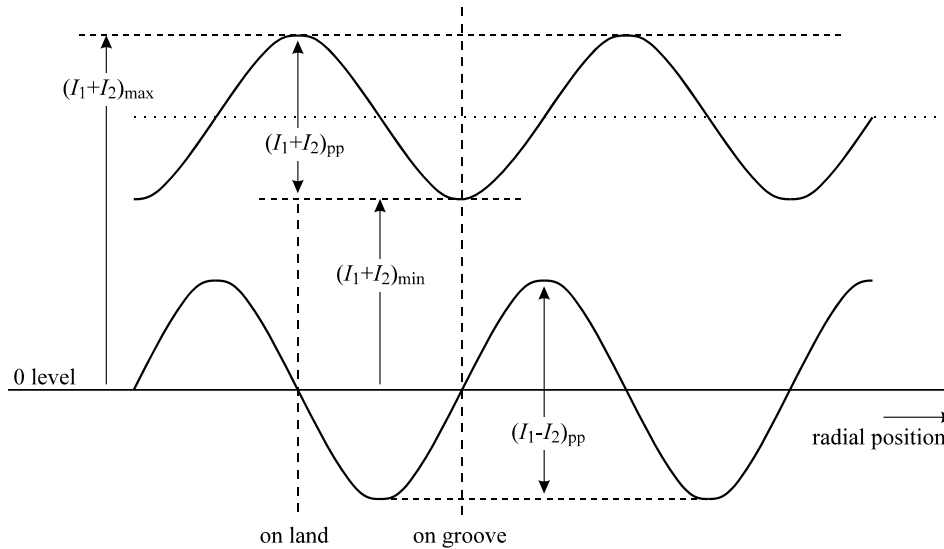


Figure 30 - Signals from grooves in the Read Channels when crossing the tracks

Push-pull signal

The push-pull signal is the filtered sinusoidal difference signal $(I_1 - I_2)$ in Read Channel 2, when the focus of the optical beam crosses the tracks. The signal can be used by the drive for radial tracking.

Track cross signal

The track cross signal is the filtered sinusoidal sum signal $(I_1 + I_2)$ in Read Channel 1, when the focus of the optical beam crosses the tracks.

Wobble signal

The wobble signal I_W is the filtered sinusoidal difference signal $(I_1 - I_2)$ in Read Channel 2, while the drive meets the minimum tracking requirement.

28 Characteristics of the groove signals

28.1 Phase depth

The phase depth of the groove shall not exceed 90°.

28.2 Push-pull signal

The peak-to-peak value of the push-pull signal PP shall meet the following requirements:

a) before recording:
$$0,30 \leq \frac{(I_1 - I_2)_{pp}}{\left[(I_1 + I_2)_{\max} + (I_1 + I_2)_{\min} \right] / 2} \leq 0,60$$

The maximum variation of the push-pull signal before recording shall be:
$$\frac{PP_{\max} - PP_{\min}}{PP_{\max} + PP_{\min}} < 0,15$$

b) after recording:
$$0,40 \leq \frac{(I_1 - I_2)_{pp}}{\left[(I_1 + I_2)_{\max} + (I_1 + I_2)_{\min} \right] / 2} \leq 0,80$$

c) Ratio of push-pull signal of unrecorded groove to push-pull signal of recorded groove shall be in the range of
$$0,60 \leq \frac{PP_{\text{before}}}{PP_{\text{after}}} \leq 1,00$$

28.3 Track Cross signal

The Track Cross signal for the unrecorded disc shall meet the following requirement:

The $(I_1 + I_2)_{\min}$ value shall be generated at the groove centre.

28.4 Normalized wobble signal

The deviation from the track centreline shall be measured by the normalized wobble signal. The amount of distance that the centre of the wobble groove deviates from the average track centreline can be calculated according to Annex M.

The wobble signal shall be measured in an empty track during the monotone wobble part, at locations where the amplitude is not enhanced due to the positive interference of the wobble from adjacent tracks.

The normalized wobble signal shall be

$$0,15 \leq \frac{I_{W,pp-\min}}{(I_1 - I_2)_{pp}} \leq 0,25$$

At locations where the amplitude of the wobble signal is enhanced due to the positive interference of the wobble from adjacent tracks, the maximum wobble signal shall be

$$\frac{I_{W,pp-\max}}{I_{W,pp-\min}} \leq 2,6$$

28.5 Characteristics of the wobble

The average Narrow band SNR of the wobble signal before recording shall be greater than 45 dB. The measurement shall be made using a resolution bandwidth of 1 kHz.

The average Narrow band SNR of the wobble signal after recording shall be greater than 38 dB. The measurement shall be made using a resolution bandwidth of 1 kHz.

This page is intentionally left blank

Section 6 - Characteristics of the recording layer

29 Method of testing

The format of the information on the disc is defined in clause 13. Clause 30 specifies the requirements for the signals from recorded marks, as obtained when using the Reference Drive as defined in clause 9.

This clause 30 specifies the average quality of the recorded information. Local deviations from the specified values, called defects, can cause tracking errors or errors in the Data fields. These errors are covered by Clause 32 and Section 7.

29.1 Environment

All signals in 30.2.2 to 30.2.6 shall be within their specified ranges with the disc in the test environment conditions defined in 8.1.1.

29.2 Reference Drive

All signals specified in 30.2.2 to 30.2.6 shall be measured in the indicated channels of the Reference Drive as defined in clause 9. The drive shall have the following characteristics for the purpose of these tests.

29.2.1 Optics and mechanics

The focused optical beam shall have the properties defined in 9.2 a) to i). The disc shall rotate as specified in 9.5.

29.2.2 Read power

The optical power incident on the read-out surface of the disc (used for reading the information) shall be $0,7 \text{ mW} \pm 0,1 \text{ mW}$.

29.2.3 Read channels

The drive shall have two read channels. Read Channel 1 gives a signal ($I_1 + I_2$) related to the total amount of light in the exit pupil of the objective lens. Read Channel 2 gives a signal ($I_1 - I_2$) related to the difference in the amount of light in the two halves of the exit pupil of the objective lens. These channels can be implemented as given in clause 9.

For measurement of the push-pull and track cross signals, the read channel signals shall be filtered by a 1st order LPF with a f_c (-3 dB) of 30 kHz.

The signal from Read channel 1 is not equalized except when measuring jitter. The threshold level for binarizing the read signal shall be controlled to minimize the effects of mark and space size changes due to parameter variations during writing. Jitter measurements shall be made using the Read Channel 1 with the characteristics in Annex E.

29.2.4 Tracking

During recording and during the measurement of the signals, the axial tracking error between the focus of the optical beam and the recording layer shall not exceed $0,20 \mu\text{m}$

and the radial tracking error between the focus of the optical beam and the centre of a track shall not exceed $0,022 \mu\text{m}$ when running at the Reference velocity and shall not exceed $0,045 \mu\text{m}$ when running at a higher velocity.

Note: At high recording or playback velocities, advanced servo systems might be needed to achieve tracking errors below these maximum values.

29.2.5 Scanning velocity

All write tests are performed at the velocities of the disc defined in 14.4.2. The disc shall be tested at all Primary and Upper speeds with the related write strategy.

All read tests are performed at the Reference velocity.

29.3 Write conditions

Marks and spaces are written on the disc by pulsing a laser.

29.3.1 Write pulse waveform

The laser power is modulated according to one of the write pulse waveforms given in Annex G.

A 3T to 14T mark is written by applying a multiple-pulse train of short write pulses or by applying a single write pulse.

The recording power has two basic levels: the Write power (P_w) and the Bias power (P_b), which are the optical powers incident at the entrance surface of the disc and used for writing marks and spaces.

In case of the single write pulse, a power enhancement dP_w can be applied depending on the type and the length of the pulses; furthermore for optimum cooling of the recording layer after writing a mark, the power shall be switched to the lowest possible level (P_c) for some time immediately following the write pulse (see Annex G.2 and G.3).

The value of the P_w power level shall be optimized according to Annex I.

The actual P_w power level shall be within 5 % of its optimum value.

29.3.2 Write power

The optimized recording powers, P_{wo} and P_{bo} shall meet the following conditions.

$P_{peak} = P_{wo}$ in case no power enhancement is applied and

$P_{peak} = P_{wo} + dP_{wo}(\text{max applied for any mark})$ in case power enhancement is applied.

for the **basic write strategy** defined in 14.4.2.2 (see also 12.3):

$$P_{peak} \leq 15,0 \text{ mW for } 650 \text{ nm} \leq \lambda \leq \lambda_{IND}$$

$$P_{peak} \leq 19,0 \text{ mW for } \lambda_{IND} < \lambda \leq 665 \text{ nm}$$

for the **“4x+” write strategy** defined in 14.4.2.3.1 (see also 12.3):

$$P_{peak} \leq 19,0 \text{ mW for } 650 \text{ nm} \leq \lambda \leq \lambda_{IND}$$

$$P_{peak} \leq 22,0 \text{ mW for } \lambda_{IND} < \lambda \leq 665 \text{ nm}$$

for the **“6x+” write strategy** defined in 14.4.2.3.2 for recording speeds up to and including 8x (see also 12.3):

$$P_{peak} \leq 30,0 \text{ mW for } 650 \text{ nm} \leq \lambda \leq \lambda_{IND}$$

$$P_{peak} \leq 35,0 \text{ mW for } \lambda_{IND} < \lambda \leq 665 \text{ nm}$$

for the **“6x+” write strategy** defined in 14.4.2.3.3 for recording speeds up to and including 16x (see also 12.3):

$$P_{peak} \leq 45,0 \text{ mW for } 650 \text{ nm} \leq \lambda \leq \lambda_{IND}$$

$$P_{peak} \leq 53,0 \text{ mW for } \lambda_{IND} < \lambda \leq 665 \text{ nm}$$

$$P_{wo} \geq 6 \text{ mW at } \lambda = \lambda_{IND}$$

$$P_{bo} = 0,7 \pm 0,1 \text{ mW}$$

$$P_{co} \leq 0,1 \text{ mW}$$

29.3.3 Write power dependency on wavelength

The change of the optimum write power P_{wo} induced by a change of the laser wavelength (see Annex K) shall meet the following condition

$$0 \leq (dP_{wo}/d\lambda)/(P_{IND}/\lambda_{IND}) \leq 25 \quad (dP_{wo}/d\lambda \text{ averaged over the wavelength range from 645 nm to 670 nm})$$

29.3.4 Write power window

To allow for some variations in the write power of practical drive implementations, the normalized write power windows (NWPW) shall have a minimum width. The normalized write power windows shall be determined in the following way:

- the jitter is measured as a function of the write power P_w at the inner diameter of the Data Zone and at the outer diameter of the Data Zone; in general those two curves will not coincide (see Figure 31),
- the single write power window is defined as the power range ($P_{upper,n} - P_{lower,n}$) where the jitter curve concerned is below 9% (see Figure 31),

the requirement for each normalized single write power window is:

$$NWPW_S = \frac{P_{upper,n} - P_{lower,n}}{(P_{upper,n} + P_{lower,n})/2} \geq 0,12$$

- the net write power window is defined as the power range where both jitter curves are below 9% (see example in Figure 31, where the net power window = $P_{upper,1} - P_{lower,2}$),
- the requirement for the normalized net write power window is:

$$NWPW_N = \frac{P_{upper,m} - P_{lower,n}}{(P_{upper,m} + P_{lower,n})/2} \geq 0,10 ,$$

in which $P_{upper,m}$ is the highest power at which both jitter curves are below 9 % and $P_{lower,n}$ is the lowest power at which both jitter curves are below 9 %

- the above requirements shall be fulfilled at all defined recording velocities

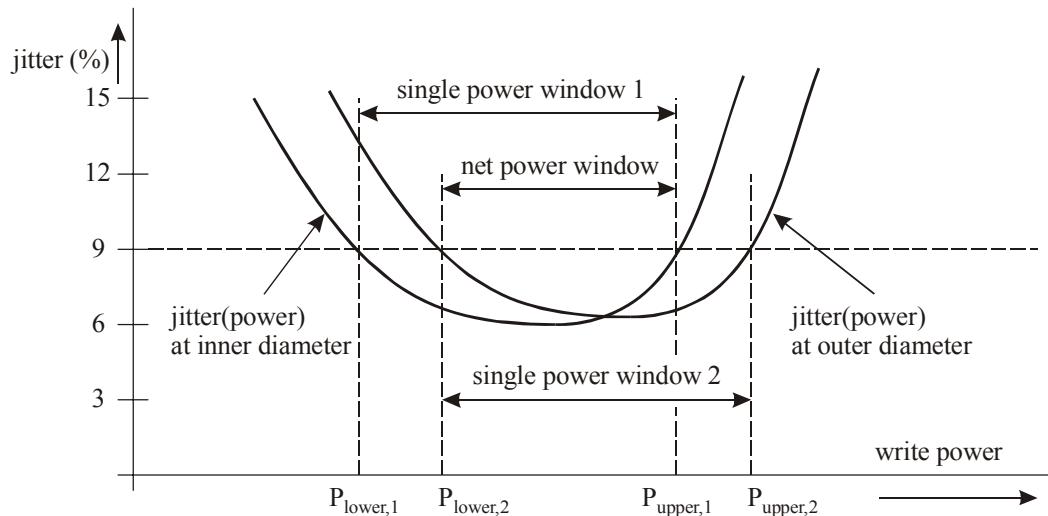


Figure 31 - Example of the write power windows

Note: Above procedures are based on typical discs which show a monotonic shift of the power window as function of the radius. If this is not the case, power windows shall be measured at several radii and the net power window shall be defined as the power range where all jitter curves are below 9%.

29.4 Measurement conditions

The test for jitter shall be carried out on any group of five adjacent tracks, designated (m-2), (m-1), m, (m+1), (m+2), in the Information Zone of the disc. The jitter shall be measured on recordings made at all velocities specified in 14.4.2.2, byte 32 and 33 and in the Extended Information blocks defined under 14.4.2.3.

For measurement of jitter the system described in Annex E shall be used.

The Jitter shall be measured according to the following procedure:

Write random data on all five tracks as specified in 29.3.1

Read the data of track m under the conditions specified in 29.2.

30 Characteristics of the recorded signals

The following signals shall be measured, after recording with the write conditions as specified in 29.3.1.

30.1 Channel bit length

The average Channel bit length over each RUN shall be

$$133,3 \text{ nm} \pm 1,4 \text{ nm}$$

30.2 Definition of signals

All signals are linearly related to currents through a photo-diode detector, and are therefore linearly related to the optical power falling on the detector.

30.2.1 High frequency signals (HF)

The HF signal is obtained by summing the currents of the four elements of the photo detector as generated in Read Channel 1. These currents are modulated by the effects of the marks and spaces representing the information on the recording layer.

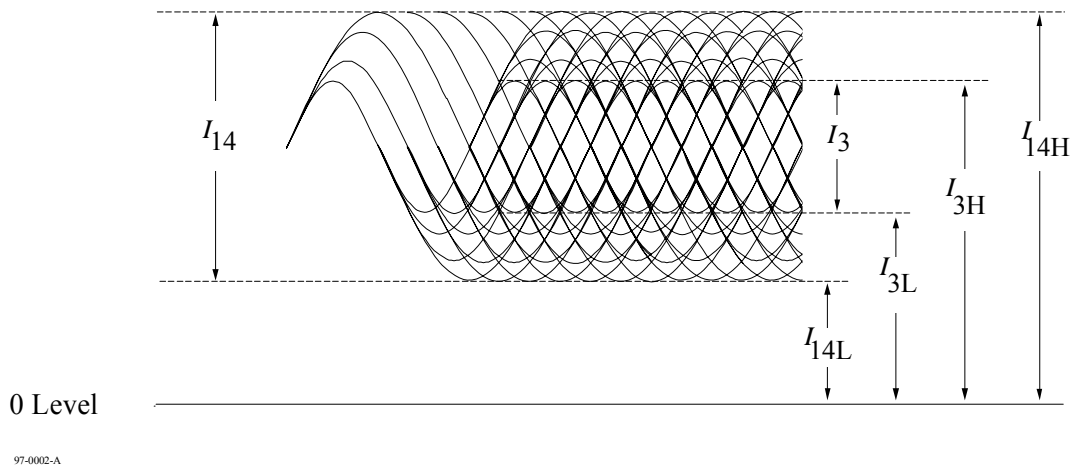


Figure 32 - Signals from spaces and marks in Read channel 1

30.2.2 Modulated amplitude

The modulated amplitude I_{14} is the peak-to-peak value of the HF signal generated by the largest mark and space lengths (see Figure 32). The peak value I_{14H} shall be the peak value of the HF signal before a.c. coupling. The modulated amplitude I_3 is the peak-to-peak value generated by the shortest mark and space lengths. The 0 Level is the signal level obtained from the measuring device when no disc is inserted. These parameters shall meet the following requirements under all conditions, also such as when recordings have been made at different speeds.

$$I_{14} / I_{14H} \geq 0,60$$

$$I_3 / I_{14} \geq 0,15$$

$$\text{Within one disc, } (I_{14H\max} - I_{14H\min}) / I_{14H\max} \leq 0,25$$

$$\text{Within one revolution, } (I_{14H\max} - I_{14H\min}) / I_{14H\max} \leq 0,15$$

30.2.3 Signal asymmetry

The signal asymmetry shall meet the following requirement:

$$-0,05 \leq \left[\frac{\frac{I_{14H} + I_{14L}}{2} - \frac{I_{3H} + I_{3L}}{2}}{I_{14}} \right] \leq +0,15$$

30.2.4 Normalized Slicing Level jump

Between any 2 consecutive ECC Blocks, the Normalized Slicing Level (NSL) jump shall be:

$$\left| \frac{(I_{3H,2} + I_{3L,2}) - (I_{3H,1} + I_{3L,1})}{(I_{3H,2} - I_{3L,2}) + (I_{3H,1} - I_{3L,1})} \right| \leq 0,50$$

where $I_{3H,1}$ and $I_{3L,1}$ are the I_3 levels just before the linking position
and $I_{3H,2}$ and $I_{3L,2}$ are the I_3 levels just after the linking position.

This requirement shall be fulfilled also when the 2 ECC Blocks have been recorded at different speeds.

30.2.5 Jitter

Jitter is the standard deviation σ of the time variations of the binary read signal. This binary read signal is created by a slicer, after feeding the HF signal from the HF read channel through an equalizer and LPF (see Annex E). The jitter of the leading and trailing edges is measured relative to the PLL clock and normalized by the Channel bit clock period.

The jitter shall be measured at the Reference velocity using the circuit specified in Annex E.

The jitter measurement shall be using the conditions specified in 29.4.

The measured jitter shall not exceed 9,0 %.

30.2.6 Track Cross signal

The Track Cross signal is the filtered sinusoidal sum signal ($I_1 + I_2$) in Read Channel 1 when the focus of the optical beam crosses the tracks (see 27.3). The Track Cross signal shall meet the following requirement:

$$\frac{(I_1 + I_2)_{pp}}{(I_1 + I_2)_{max}} \geq 0,13$$

30.3 Read stability

When read with a read power of 0,8 mW at a temperature of 55 °C, all parameters specified in 30.2.2 to 30.2.6 shall be within their specified ranges after 1 000 000 repeated reads.

Note: Reading with the same read power at lower speeds than the reference speed might degrade the read stability.

31 Additional testing conditions

Recorded DVD+R discs compliant with this DVD+R System Description shall also fulfil the following basic signal specifications when measured with the Pick Up Head according to the DVD – Read-Only Standard (see ECMA-267).

31.1 Test environment

All conditions are the same as in 29.1 to 29.2.5 except for the following.

31.1.1 Optics

The focused optical beam used for reading data shall have the following properties:

- a) Wavelength (λ) 650 nm \pm 5 nm
- b) Numerical aperture of the objective lens (NA) 0,60 \pm 0,01
- c) The objective lens shall be compensated for spherical aberrations caused by a parallel substrate with nominal thickness (0,6 mm) and nominal refractive index (1,55).
- d) Wave front aberration $0,033 \times \lambda$ rms max.
- e) Light intensity at the rim of the pupil of the objective lens 60 % to 70 % of the maximum intensity in the radial direction and over 90 % in the tangential direction.
- f) Polarization of the light Circular
- g) Read power 0,7 mW \pm 0,1 mW
- h) Relative Intensity Noise (RIN) * of laser diode -134 dB/Hz max.

*RIN (dB/Hz) = 10 log [(a.c. light power density / Hz) / d.c. light power]

31.2 Definition of signals

For the definition of the following signals see 30.2 and the underlying subclauses.

31.2.1 Modulated amplitude

$$I_{14} / I_{14H} \geq 0,60$$

$$I_3 / I_{14} \geq 0,15$$

$$\text{Within one disc, } (I_{14H\max} - I_{14H\min}) / I_{14H\max} \leq 0,33 \text{ (with PBS)}$$

$$\text{Within one disc, } (I_{14H\max} - I_{14H\min}) / I_{14H\max} \leq 0,20 \text{ (without PBS)}$$

$$\text{Within one revolution, } (I_{14H\max} - I_{14H\min}) / I_{14H\max} \leq 0,15 \text{ (with PBS)}$$

$$\text{Within one revolution, } (I_{14H\max} - I_{14H\min}) / I_{14H\max} \leq 0,10 \text{ (without PBS)}$$

31.2.2 Signal asymmetry

$$-0,05 \leq \left[\frac{\frac{I_{14H} + I_{14L}}{2} - \frac{I_{3H} + I_{3L}}{2}}{I_{14}} \right] \leq +0,15$$

31.2.3 Jitter

The jitter shall be measured at the Reference velocity using the circuit specified in Annex E.

The jitter measurement shall be using the conditions specified in 29.4.

The measured jitter shall not exceed 9,0 %.

31.2.4 Track Cross signal

The Track Cross signal (see 27.3) shall meet the following requirement: $\frac{(I_1 + I_2)_{pp}}{(I_1 + I_2)_{max}} \geq 0,10$

31.2.5 Differential phase tracking error signal

The output currents of the four quadrants of the split photo detector shown in Figure 33 are identified by I_a , I_b , I_c , and I_d .

The differential phase tracking error signal shall be derived from the phase differences between the sum of the currents of diagonal pairs of photo detector elements when the light beam crosses the tracks:

{Phase ($I_a + I_c$) - Phase($I_b + I_d$)} , see Figure 34 and Annex F.

The phase difference signals shall be low-pass filtered with f_c (-3 dB) of 30 kHz.

This differential phase tracking error signal shall meet the following requirements (see Figure 34):

Amplitude


At the positive 0 crossing $\overline{\Delta t} / T$ shall be in the range 0,50 to 1,10 at 0,10 μm radial offset, where $\overline{\Delta t}$ is the average time difference derived from the phase differences between the sum of the currents of diagonal pairs of photo detector elements, and T is the Channel bit clock period .

Asymmetry (see Figure 34)

The asymmetry shall meet the following requirement:

$$\frac{|T_1 - T_2|}{|T_1 + T_2|} \leq 0,20 , \text{ where } T_1 \text{ is the positive peak value of } \overline{\Delta t} / T$$

and T_2 is the negative peak value of $\overline{\Delta t} / T$

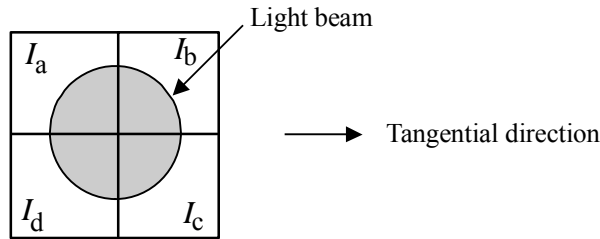

97-0047-A

Figure 33 - Quadrant photo detector

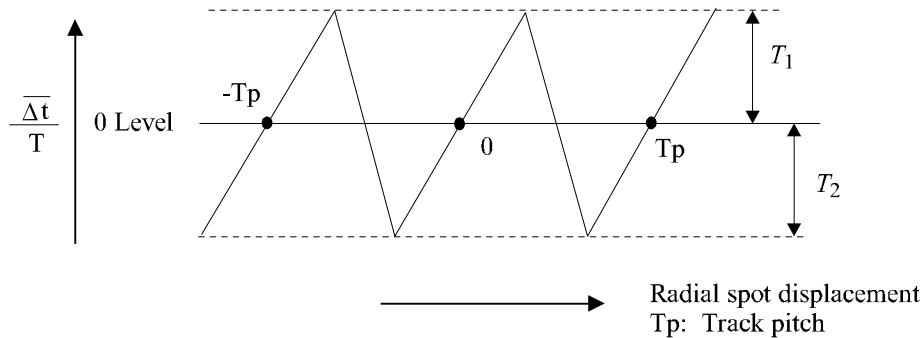


Figure 34 - Differential phase tracking error signal

31.2.6 Tangential push-pull signal

This signal shall be derived from the instantaneous level of the differential output $(I_a + I_d) - (I_b + I_c)$. It shall meet the following requirements, see Figure 35:

$$0 \leq \frac{[(I_a + I_d) - (I_b + I_c)]_{pp}}{I_{14}} \leq 0,9$$

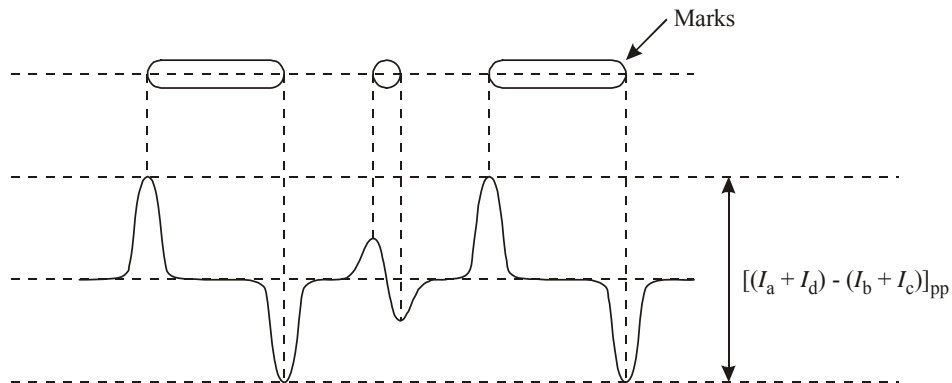


Figure 35 – Tangential push-pull signal

32 Quality of the recording layer

For the integrity of the data on the disc, the recording layer shall fulfil the following initial quality requirements.

32.1 Defects

Defects are air bubbles and black spots. Their diameter shall meet the following requirements:

- for air bubbles it shall not exceed 100 μm ,
- for black spots causing birefringence it shall not exceed 200 μm ,
- for black spots not causing birefringence it shall not exceed 300 μm .

In addition, over a distance of 80 mm in scanning direction of tracks, the following requirements shall be met:

- the total length of defects larger than 30 μm shall not exceed 300 μm ,
- there shall be at most 6 such defects.

32.2 Data errors

A byte error occurs when one or more bits in a byte have a wrong value, as compared to their original recorded value.

A row of an ECC Block as defined in 13.3 that has at least 1 byte in error constitutes a PI error.

If a row of an ECC Block as defined in 13.3 contains more than 5 erroneous bytes, the row is said to be "PI-uncorrectable".

The disc shall be recorded with arbitrary data in one single uninterrupted writing action from the start of the Lead-in Zone until the end of the Lead-out Zone ("Disc-At-Once" mode).

During playback after the initial recording, the errors as detected by the error correction system shall meet the following requirements:

- in any 8 consecutive ECC Blocks the total number of PI errors before correction shall not exceed 280,
- in any ECC Block the number of PI-uncorrectable rows should not exceed 4.

Section 7 - Characteristics of user data

33 Method of testing

Clause 34 describes a series of measurements to test conformance of the user data on the disc with this System Description. It checks the legibility of the user-written data. The data is assumed to be arbitrary. The data may have been written by any drive in any operating environment (see 8.1.2). The read tests shall be performed on the Reference Drive as defined in clause 9.

Whereas clause 29 disregards defects, clause 34 includes them as an unavoidable deterioration of the read signals. The severity of a defect is determined by the correctability of the ensuing errors by the error detection and correction circuit in the read channel defined below. The requirements in clause 34 define a minimum quality of the data, necessary for data interchange.

33.1 Environment

All signals in 34.1 to 34.2 shall be within their specified ranges with the disc in any environment in the range of allowed operating environments defined in 8.1.2. It is recommended that before testing, the entrance surface of the disc shall be cleaned according to the instructions of the manufacturer of the disc.

33.2 Reference Drive

All signals specified in clause 34 shall be measured in the indicated channels of the Reference Drive as defined in clause 9. The drive shall have the following characteristics for the purpose of these tests:

33.2.1 Optics and mechanics

The focused optical beam shall have the properties already defined in 9.2 a) to i). The disc shall rotate as specified in 9.5.

33.2.2 Read power

The optical power incident on the entrance surface of the disc (used for reading the information) shall be $0,7 \text{ mW} \pm 0,1 \text{ mW}$.

33.2.3 Read channels

The drive shall have two read channels. Read Channel 1 gives a signal $(I_1 + I_2)$ related to the total amount of light in the exit pupil of the objective lens. Read Channel 2 gives a signal $(I_1 - I_2)$ related to the difference in the amount of light in the two halves of the exit pupil of the objective lens. These channels can be implemented as given in 9.3 and 9.6.

The signal from Read channel 1 is equalized and filtered before processing. The threshold level for binarizing the read signal shall be controlled to minimize the effects of mark and space size changes due to parameter variations during writing. For measurement of the disc quality as specified in clause 34, the equalizer, filter and slicer, and the characteristics of the PLL shall be the same as specified in Annex E for the jitter measurement.

33.2.4 Error correction

Correction of errors in the data bytes shall be carried out by an error detection and correction system based on the definition in 13.3.

33.2.5 Tracking

During the measurement of the signals, the axial tracking error between the focus of the optical beam and the recording layer shall not exceed $0,20 \mu\text{m}$

and the radial tracking error between the focus of the optical beam and the centre of a track shall not exceed $0,022 \mu\text{m}$

34 Minimum quality of a Recording Unit

This clause specifies the minimum quality of the data of a Recording Unit as required for data interchange. The quality shall be measured on the Reference Drive as defined in clause 9 and Annex E.

A byte error occurs when one or more bits in a byte have a wrong value, as detected by the ECC and/or EDC circuits.

34.1 Tracking

The focus of the optical beam shall not jump tracks unintentionally.

34.2 User-written data

The user-written data in a Recording Unit as read in Read channel 1 shall not contain any byte errors that cannot be corrected by the error correction defined in 13.3.

Annex A 80 mm DVD+R disc

(normative)

The DVD+R Format also allows an 80 mm disc with capacities of 1,46 Gbytes and 2,92 Gbytes. All mechanical, physical and optical characteristics shall be equal to those of the 120 mm discs specified in this document, except for the following items:

see: **10.2 Overall dimensions**

The disc shall have an overall diameter $d_1 = 80,00 \text{ mm} \pm 0,30 \text{ mm}$

see: **10.7 Information Zone**

The Information Zone shall extend from diameter d_6 to diameter

$$d_7 = 77,5 \text{ mm min.}$$

This Zone consists of the Lead-in Zone, the Data Zone, the Lead-out Zone and the Inner and Outer Drive Areas (see also clause 15).

see: **11.1 Mass**

The mass of the disc shall be in the range of 6,0 g to 9,0 g.

see: **11.2 Moment of inertia**

The moment of inertia of the disc, relative to its rotation axis, shall not exceed $0,010 \text{ g}\cdot\text{m}^2$.

see: **11.3 Dynamic Imbalance**

The dynamic imbalance of the disc, relative to its rotation axis, shall not exceed 1,5 g·mm.

see: **14.1 Track shape**

The tracks shall be continuous in the Information Zone. The groove tracks shall start at a radius of 22,00 mm max. and end at a radius of 38,75 mm min.

see: **14.4.1.1 ADIP word structure, bit 2 to 23**

Physical ADIP Address (0379CC), which is the first address corresponding to the Lead-out Zone, shall be located at a radius $\leq 38,00 \text{ mm}$.

see: **14.4.2.1 General information - Bytes 0 to 31**

Byte 1 – Disc size and maximum transfer rate

Bits b_7 to b_4 shall specify the disc size, they shall be set to 0001, indicating a 80 mm disc

Bytes 4 to 15 – Data Zone allocation

Bytes 9 to 11 shall be set to (0DE72F) to specify PSN 911 151 as the last possible Physical Sector of the Data Zone.

see: **16 Layout of the Information Zone of a Single-session disc**

Table 8 – Layout of a fully recorded Single-session disc

	Description	Nominal radius in mm	PSN of the first Physical Sector	Number of Physical Sectors
<u>Inner Drive Area</u>	all the same as 120 mm disc	---	---	---
<u>Lead-in</u>	all the same as 120 mm disc	---	---	---
<u>Data</u>	Data Zone	start 24,000 mm	(030000)	714 544 max
<u>Lead-out</u>	Buffer Zone 3	start 38,000 mm (at full capacity)	(0DE730) max	768
	Outer Disc Identification Zone		(0DEA30) max	256
	Guard Zone 2		(0DEB30) max	4 096 min
<u>Outer Drive Area</u>	Outer Disc Administration Zone	start 38,082 mm	(0DFB30)	4 096
	Outer Disc Count Zone	start 38,147 mm	(0E0B30)	4 096
	Outer Disc Test Zone	start 38,212 mm	(0E1B30)	16 384
	Guard Zone 3	start 38,472 mm end ≥ 38,500 mm	(0E5B30)	blank

see: **18.8.1 Physical format information**

Bytes 4 to 15 – Data Zone allocation

Bytes 9 to 11 on a finalized Single Session disc (see 23.3):
shall specify the Sector Number of the last Physical Sector of the Data Zone.

on a Multi-session disc (see clause 22):
shall be set to (0DE72F) to specify PSN 911 151 as the last possible Physical Sector on the disc for the storage of User Data.

see: **19 Data Zone**

714 544 Physical Sectors for the storage of user data area.

The start radius of the Data Zone is determined by the location of Physical ADIP Address (00C000) and the maximum end radius is determined by the location of Physical ADIP Address (0379CC) (see 14.4.1.1, bit 2 to 23 and 13.7.1)

see: **20 Lead-out Zone**

Figure 27 – Lead-out Zone

	Data Zone	
---		---
Physical Sector 911 152	Buffer Zone 3 768 Physical Sectors with Main Data set to (00)	Physical Sector (0DE730)
Physical Sector 911 919	Outer Disc Identification Zone 256 Physical Sectors	Physical Sector (0DEA2F)
Physical Sector 911 920		Physical Sector (0DEA30)
Physical Sector 912 175	Guard Zone 2 min 4 096 Physical Sectors with Main Data set to (00)	Physical Sector (0DEB2F)
Physical Sector 912 176		Physical Sector (0DEB30)
Physical Sector 916 271	Outer Drive Area	Physical Sector (0DFB2F)

see: **20.1 Buffer Zone 3**

The last possible start location of Buffer Zone 3 is (0DE730).

see: **21 Outer Drive Area**

Figure 28 – Outer Drive Area

	Lead-out Zone	
Physical Sector 916 272	Outer Disc Administration Zone 4 096 Physical Sectors	Physical Sector (0DFB30)
Physical Sector 920 367	Outer Disc Count Zone 4 096 Physical Sectors	Physical Sector (0E0B2F)
Physical Sector 920 368		Physical Sector (0E0B30)
Physical Sector 924 463	Outer Disc Test Zone 16 384 Physical Sectors	Physical Sector (0E1B2F)
Physical Sector 924 464		Physical Sector (0E1B30)
Physical Sector 940 847	Guard Zone 3 Blank	Physical Sector (0E5B2F)
Physical Sector 940 848		Physical Sector (0E5B30)

see: **21.2 Outer Disc Count Zone**

The relation between the first Physical Sector number PSN_{ODT} of the used ECC Block in the Outer Disc Test Zone and the Physical Sector numbers PSN_{ODC} to $PSN_{ODC} + 3$ of the 4 Physical Sectors in the Outer Disc Count Zone is determined by the following mathematical expression:

$$PSN_{ODC} = \{(PSN_{ODT}) - (0E1B30)\} / (04) + (0E0B30)$$

This page is intentionally left blank

Annex B Structure for Extended format information in the Data Zone

(normative)

The ADIP Aux Frames in the Data Zone may be used to store information needed to support specific applications, such as e.g. encryption/decryption keys needed for a copy-protection system. This annex only specifies the general structure for such information.

B.1 Extended format information

The Extended Format Information consists of a table of contents (EFI TOC) and up to 16 distinct regions that contain additional format information. The EFI TOC defines the location and contents of the regions contained in the Extended Format Information, see B.1.1. The EFI TOC shall be stored in the ADIP Aux Frames (see 14.4.1.1) in the Data Zone, starting at the ADIP word that has Physical ADIP Address (00C000). The regions of the Extended Format Information shall be located in the ADIP Aux Frames in the Data Zone and/or shall be present as pre-recorded areas in the main data channel. Each region contains one or more copies of a data block of a particular type, as indicated in the EFI TOC.

Figure B.1 schematically shows an example lay-out, based on the VCPS copy-protection system, with the EFI TOC and the VCPS-defined regions that are contained in the ADIP Aux Frames in the Data Zone. The EFI TOC consists of 8 consecutive copies of an ETOC block, where each ETOC block contains the complete EFI TOC information (see B.1.1). The VCPS-defined hash region contains one or more copies of the DKB hash value, as specified in the EFI TOC. The VCPS-defined DKB region contains one or more copies of the DKB, as specified in the EFI TOC. Gaps may exist between any two regions. All bytes in the ADIP Aux Frames in the gaps shall be set to (00).

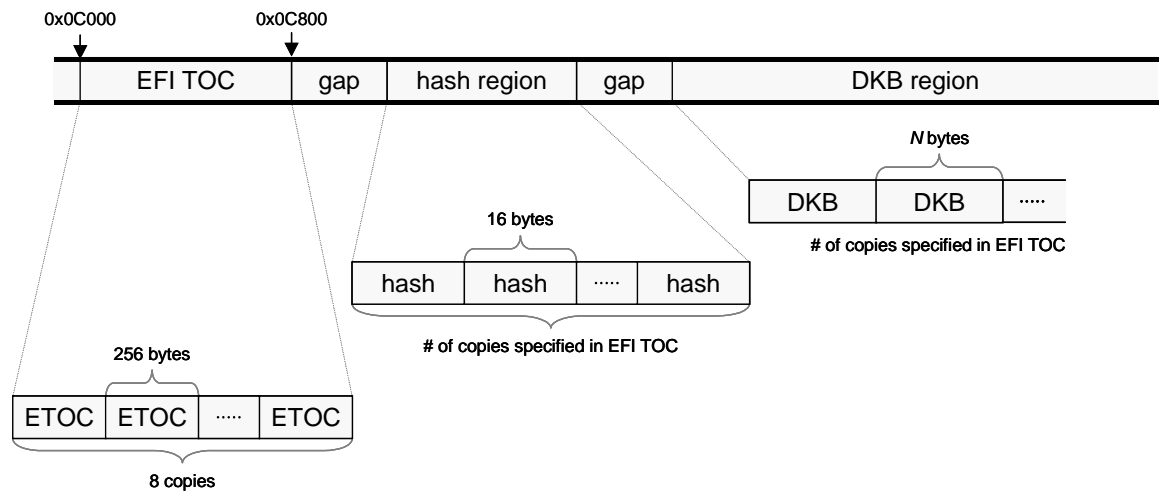


Figure B.1 – Example lay-out of Extended format information in ADIP

B.1.1 EFI TOC

The EFI TOC starts at the ADIP word that has Physical Address (00C000). The length of the EFI TOC is 8 ADIP Aux Frames, which is equivalent to 2048 consecutive ADIP words. As shown in Figure B.1, the EFI TOC consists of 8 consecutive copies of an ETOC block. The ETOC block consists of at most 16 Region Descriptors, as defined in Figure B.2. The combined size of all Region Descriptors contained in the ETOC block shall be no more than 256 bytes. Remaining bytes shall be set to all zeros, such that the size of the ETOC block is exactly 256 bytes.

Bit	7	6	5	4	3	2	1	0
Byte								
0	Region Descriptor #1							
:								
:								
:	Region Descriptor #2							
:								
:								
:	Region Descriptor #n							
:								
:								
:	(00)							
:	:							
255	(00)							

Figure B.2 – ETOC block

Region Descriptor #i: Region Descriptor #i contains information with respect to the *i*-th region of the Extended Format Information ($1 \leq i \leq n \leq 16$). A Region Descriptor consists of a Basic Region Descriptor followed by zero or more Extended Region Descriptors. The format of a Basic Region Descriptor is defined in Figure B.3. The format of an Extended Region Descriptor is defined in Figure B.4.

Bit	7	6	5	4	3	2	1	0
Byte								
0	(msb) <div>Region Type Identifier</div> (lsb)							
1								
2								
3	Extent	Version number						
4	(msb) <div>Region Start Address</div> (lsb)							
5								
6								
:	(msb) <div>Data Block Size</div> (lsb)							
9								
10								
11	Repeat Count							
11	Reserved							Private
12	(msb) <div>Alternative Location</div> (lsb)							
:								
15								

Figure B.3 – Basic Region Descriptor

Region Type Identifier: The type of the data block that is contained in the region. Data blocks stored in different regions having the same Region Type Identifier shall be identical.

Extent: The Extent bit shall indicate if this Basic Region Descriptor is followed by an Extended Region Descriptor, as follows:

- 0: This Basic Region Descriptor is not followed by an Extended Region Descriptor.
- 1: This Basic Region Descriptor is followed by an Extended Region Descriptor.

Version Number: The revision of the data block type that is contained in the region.

Region Start Address: If the data block is stored in the ADIP Aux Frames, the Region Start Address is given as the Physical ADIP Address of the ADIP word that contains the first byte of the data block, divided by 256. The Region Start Address shall be greater than or equal to (00C8). If the data block is not stored in the ADIP Aux Frames, the Region Start Address shall be zero. In that case the Alternative Location shall be non-zero and specify the location of the data block in the main data channel.

Data Block Size: The size in bytes of a single copy of the data block in the region. The Data Block Size shall be set to zero if the data block is not contained in the ADIP Aux Frames.

Repeat Count: The number of consecutive copies of the data block that are contained in the region. If the data block is stored in the ADIP Aux Frames and the region extends through the end of the Disc, Repeat Count shall be set to 0. The Repeat Count shall be set to zero if the data block is not contained in the ADIP Aux Frames.

Reserved: All reserved bits shall be set to '0'.

Private: The Private bit shall indicate if a Drive is permitted to output the contents of the region, as follows:

- 0: A Drive is permitted to output the contents of the region.
- 1: A Drive is not permitted to output the contents of the region.

Alternative Location: In addition to, or alternative to storage in the ADIP Aux Frames, the data block may be stored in a contiguous area of the main data channel. In that case, the Alternative Location specifies the first Physical Sector Number of the location in the main data channel that contains one or more copies of the data block. Otherwise, Alternative Location shall be set to zero. Note that the format of the data block as contained in the main data channel may be different from the format of the data block as contained in the ADIP Aux Frames.

Bit	7	6	5	4	3	2	1	0
Byte								
0	(msb) <div>Region Type Identifier</div> (lsb)							
1								
2								
3	Extent	Version number						
4	Reserved							
:								
15								

Figure B.4 – Extended Region Descriptor

Region Type Identifier: the Region Type Identifier shall be identical to the Region Type Identifier contained in the preceding Basic Region Descriptor.

Extent: The Extent bit shall indicate if this Extended Region Descriptor is followed by another Extended Region Descriptor, as follows:

- 0: This Extended Region Descriptor is not followed by another Extended Region Descriptor.
- 1: This Extended Region Descriptor is followed by another Extended Region Descriptor.

Version Number: the Version Number shall be identical to the Version Number contained in the preceding Basic Region Descriptor.

Reserved: All reserved bytes shall be set to (00).

This page is intentionally left blank

Annex C Measurement of light reflectivity (normative)

C.1 Calibration method

The reflectivity of a disc can be measured in several ways. The two most common methods are:

- parallel method,
- focused method.

For use in players the focused method with the help of a reference disc with known reflectance is the most relevant and easiest one, while for the calibration of the reference disc the parallel method is easier.

When measuring the reflectivity in the focused way, only the light returned by the reflective layer of the disc (I_m) will fall onto the photo detector. The reflected light coming from the front surface of the disc and the light coming from the parasitic reflections inside the disc will mainly fall outside the photo detector. Because in the parallel method only the “total” reflected power ($I_{//}$) can be measured, a calculation is needed to determine the “main” reflectance from the reflective layer.

A good reference disc shall be chosen, for instance 0,6 mm glass disc with a golden reflective mirror. This reference disc shall be measured by a parallel beam as shown in figure C.1

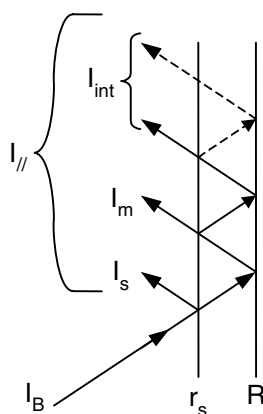


Figure C.1 - Reflectivity calibration

In this figure the following applies:

R = reflectance of the recording layer (including the double pass substrate transmittance)

r_s = reflectance of the entrance surface

R_{ref} = reflectance as measured by the focussed beam (is by definition $= I_m / I_B$)

$R_{//}$ = reflectance as measured by the parallel beam (is by definition $= I_{//} / I_B$)

I_B = power of incident beam

I_s = reflected power from entrance surface

I_m = reflected power from recording layer

I_{int} = reflected power from internal reflections between entrance surface and recording layer

$I_{//}$ = measured reflected power ($I_s + I_m + I_{int}$)

The reflectance of the entrance surface is defined by :

$$r_s = \left(\frac{n-1}{n+1} \right)^2, \text{ where } n \text{ is the index of refraction of the substrate.}$$

The main reflected power $I_m = I_{//} - I_s - I_{int}$ which leads to:

$$R_{ref} = \left[\frac{(1-r_s)^2 \times (R_{//} - r_s)}{1-r_s \times (2-R_{//})} \right]$$

The reference disc shall be measured on a reference drive. The total detector current ($I_1 + I_2$) obtained from the reference disc, and measured by the focused beam is equated to I_m as determined above.

Now the arrangement is calibrated and the focused reflectance is a linear function of the reflectivity of the recording layer and the double pass substrate transmission, independently from the reflectivity of the entrance surface.

C.2 Measuring method

Reflectivity in the unrecorded Information Zone

A method of measuring the reflectance using the reference drive.

- (1) Measure the total detector current $(I_1 + I_2)_s$ from the reference disc with calibrated reflectance R_{ref} .
- (2) Measure the total detector current $(I_1 + I_2)_g$ from a groove track in an area of the disc under investigation where the groove track and the two adjacent tracks on each side of the track to be measured have not been recorded.
- (3) Calculate the unrecorded disc reflectance R_d as follows

$$R_d = \frac{(I_1 + I_2)_g}{(I_1 + I_2)_s} \times R_{ref}$$

Reflectivity in the recorded Information Zone

A method of measuring the reflectance using the reference drive.

- (1) Measure the total detector current $(I_1 + I_2)_s$ from the reference disc with calibrated reflectance R_{ref} .
- (2) Measure I_{14H} from a recorded groove track in an area of the disc under investigation where at least the two adjacent tracks on each side of the track to be measured have been recorded.
- (3) Calculate the recorded disc reflectance R_{14H} as follows:

$$R_{14H} = \frac{I_{14H}}{(I_1 + I_2)_s} \times R_{ref}$$

Annex D Measurement of birefringence (normative)

D.1 Principle of the measurement

In order to measure the birefringence, circularly polarized light in a parallel beam is used. The phase retardation is measured by observing the ellipticity of the reflected light.

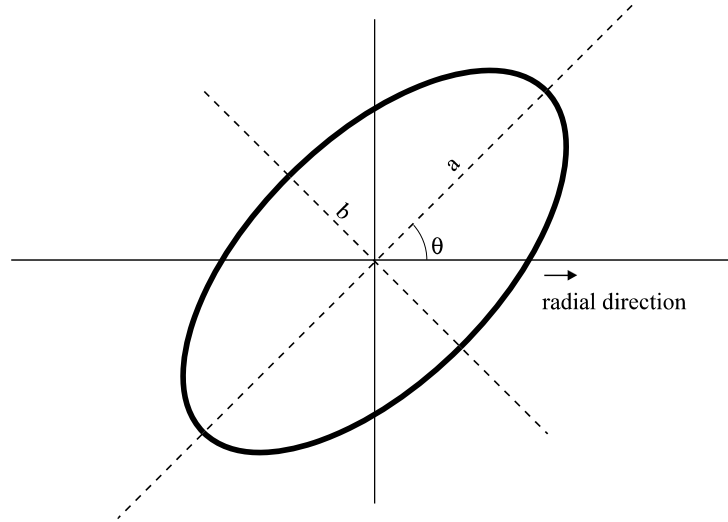


Figure D.1 - Ellipse with ellipticity $e = b/a$ and orientation θ

The orientation θ of the ellipse is determined by the orientation of the optical axis

$$\theta = \gamma - \pi/4 \quad (1)$$

where γ is the angle between the optical axis and the radial direction.

The ellipticity, $e = b/a$, is a function of the phase retardation δ

$$e = \tan \left[\frac{1}{2} \left(\frac{\pi}{2} - \delta \right) \right] \quad (2)$$

When the phase retardation δ is known the birefringence BR can be expressed as a fraction of the wavelength

$$BR = \frac{\lambda}{2\pi} \delta \text{ nm} \quad (3)$$

Thus, by observing the elliptically polarized light reflected from the disc, the birefringence can be measured and the orientation of the optical axis can be assessed as well.

D.2 Measurements conditions

The measurement of the birefringence specified above shall be made under the following conditions.

Mode of measurement in reflection, double pass through the substrate.

Wavelength λ of the laser light	640 nm \pm 15 nm
Beam diameter (FWHM)	1,0 mm \pm 0,2 mm
Angle β of incidence in radial direction relative to the radial plane perpendicular to Reference Plane P	7,0° \pm 0,2°
Disc mounting	horizontally
Rotation	less than 1 Hz
Temperature and relative humidity	as specified in 8.1.1

D.3 Example of a measurement set-up

Whilst this System Description does not prescribe a specific device for measuring birefringence, the device shown schematically in figure D.2 as an example, is well suited for this measurement.

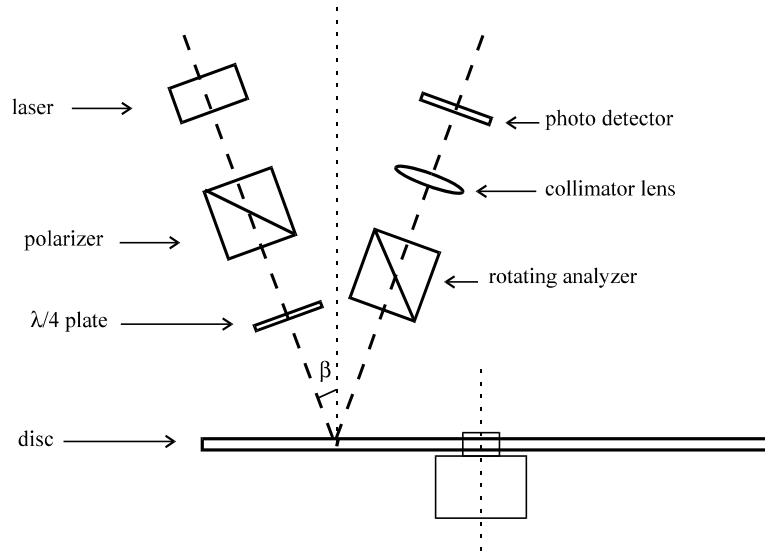


Figure D.2 - Example of a device for the measurement of birefringence

Light from a laser source, collimated into a polarizer (extinction ratio $\approx 10^{-5}$), is made circular by a $\lambda/4$ plate. The ellipticity of the reflected light is analyzed by a rotating analyzer and a photo detector. For every location on the disc, the minimum and the maximum values of the intensity are measured. The ellipticity can then be calculated as

$$e^2 = I_{\min} / I_{\max} \quad (4)$$

Combining equations (2), (3), and (4) yields

$$BR = \frac{\lambda}{4} - \frac{\lambda}{\pi} \arctan \sqrt{\frac{I_{\min}}{I_{\max}}}$$

This device can be easily calibrated as follows

- I_{\min} is set to 0 by measuring a polarizer or a $\lambda/4$ plate,
- $I_{\min} = I_{\max}$ when measuring a mirror

Apart of the d.c. contribution of the front surface reflection, a.c. components may occur, due to the interference of the reflection(s) of the front surface with the reflection(s) from the recording layer. These a.c. reflectivity effects are significant only if the disc substrate has an extremely accurate flatness and if the light source has a high coherence.

Annex E Measuring conditions for operation signals (normative)

E.1 System diagram for jitter measurement and characterization of user data

The general system diagram shall be as shown in figure E.1.

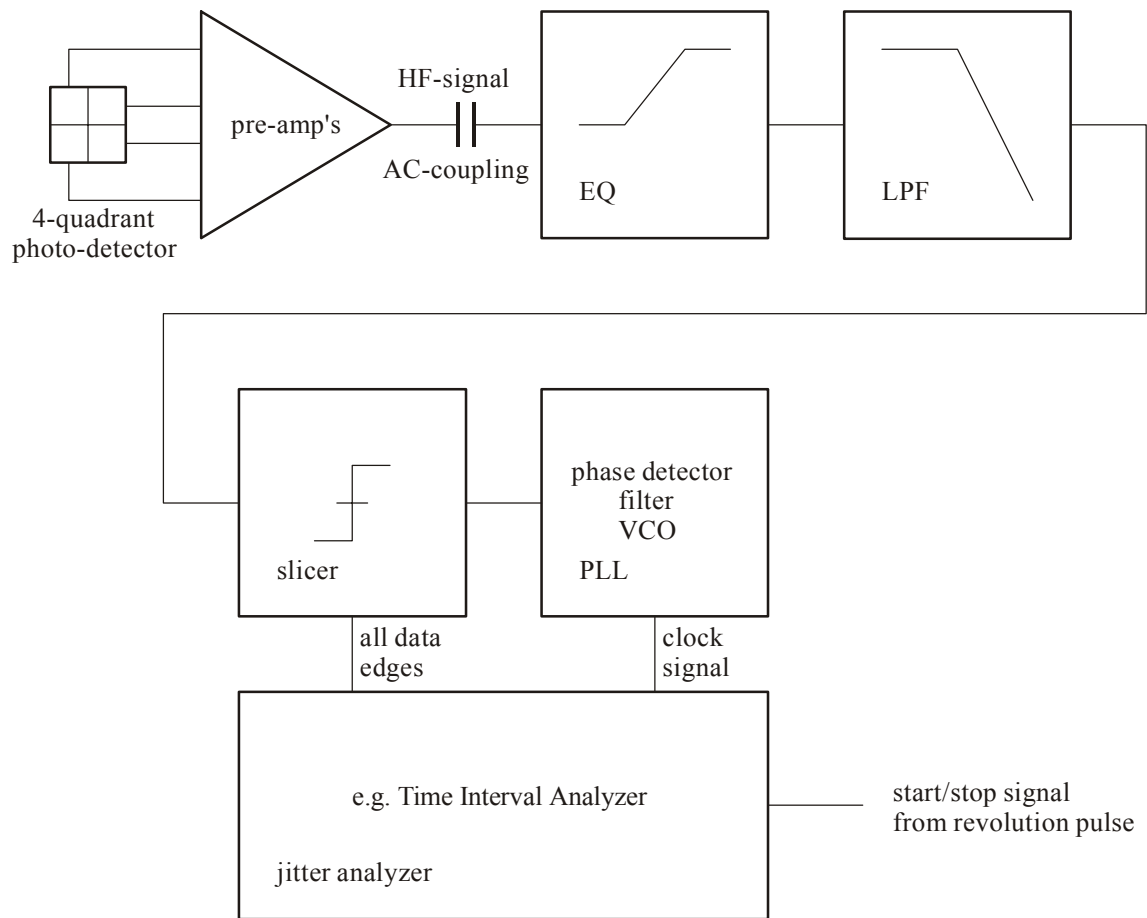


Figure E.1 - General diagram for jitter measurement

E.2 Open loop transfer function for PLL

The open-loop transfer function for the PLL shall be as shown in figure E.2

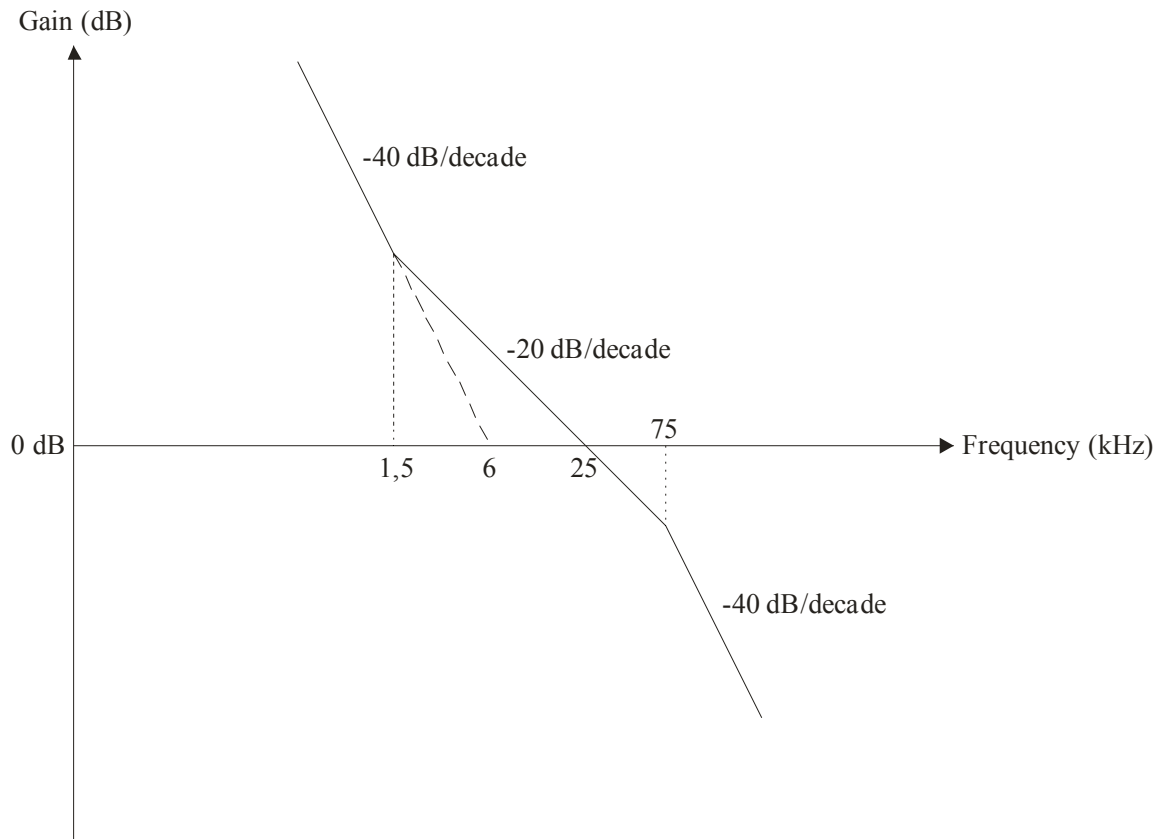


Figure E.2 - Schematic representation of the open-loop transfer function for PLL

E.3 Slicer

The slicer shall be a 1st order, integrating feed-back auto-slicer with a -3 dB closed-loop bandwidth of 5 kHz.

E.4 Conditions for measurement

The bandwidth of the pre-amplifier of the photo detector shall be greater than 20 MHz in order to prevent group-delay distortion.

Equalizer: 3-tap transversal filter with transfer function $H(z) = 1,364 z^{-2} - 0,182 (1 + z^{-4})$

Low-pass filter: 6th order Bessel filter, f_c (-3 dB) = 8,2 MHz

Filtering plus equalization :

- Gain variation : 1 dB max. (below 7 MHz)
- Group delay variation : 1 ns max. (below 7 MHz)
- (Gain at 5,0 MHz - Gain at 0 Hz) = 3,2 dB \pm 0,3 dB

a.c. coupling (high-pass filter) = 1st order, f_c (-3 dB) = 1 kHz

Correction of the angular deviation : only d.c. deviation shall be corrected.

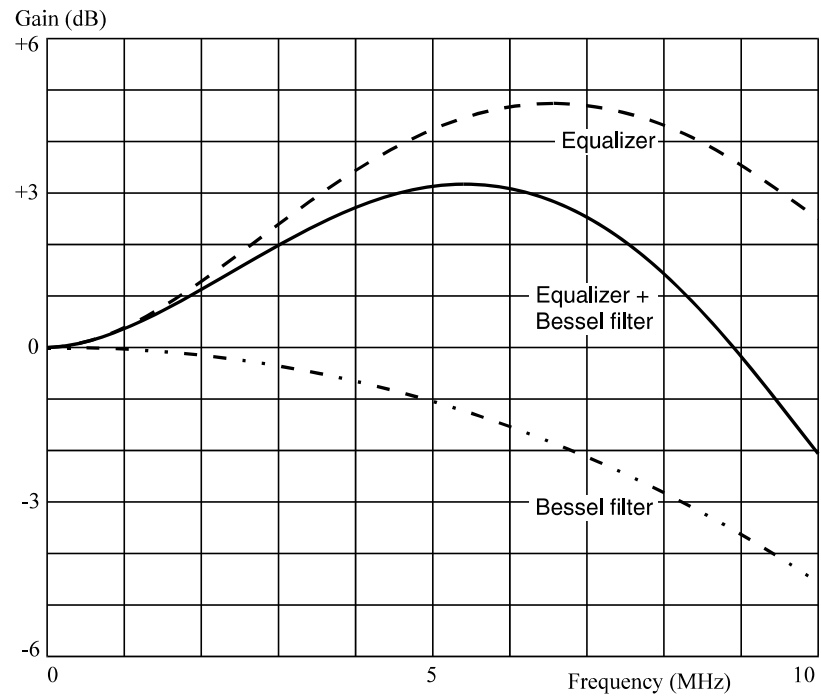


Figure E.3 - Frequency characteristics for the equalizer and the low-pass filter

E.5 Measurement

The jitter of all leading and trailing edges over one revolution shall be measured.

This page is intentionally left blank

Annex F Measurement of the differential phase tracking error (normative)

F.1 Measuring method for the differential phase tracking error

The reference circuit for the measurement of the tracking error shall be that shown in figure F.1. Each output of the diagonal pairs of elements of the quadrant photo detector shall be converted to binary signals independently after equalization of the wave form with the transfer function defined by:

$$H(i\omega) = (1 + 1,6 \times 10^{-7} \times i\omega) / (1 + 4,7 \times 10^{-8} \times i\omega)$$

The gain of the comparators shall be sufficient to reach full saturation on the outputs, even with minimum signal amplitudes. Phases of the binary pulse signal edges (signals B1 and B2) shall be compared to each other to produce a time-lead signal C1 and a time-lag signal C2. The phase comparator shall react to each individual edge with signal C1 or C2, depending on the sign of Δt_i . A tracking error signal shall be produced by smoothing the C1, C2 signals with low-pass filters and by subtracting by means of a unity gain differential amplifier. The low-pass filters shall be 1st order filters with a cut-off frequency (-3 dB) of 30 kHz.

Special attention shall be given to the implementation of the circuit because very small time differences have to be measured (1 % of T equals only 0,38 ns). Careful averaging is needed.

The average time difference between two signals from the diagonal pairs of elements of the quadrant detector shall be

$$\overline{\Delta t} = \frac{1}{N} \sum \Delta t_i$$

where N is the number of edges, both rising and falling.

F.2 Measurement of $\overline{\Delta t} / T$ without time interval analyzer

The relative time difference $\overline{\Delta t} / T$ is represented by the amplitude of the tracking error signal provided that the amplitudes of the C1 and C2 signals and the frequency component of the read-out signals are normalized. The relation between the tracking error amplitude $\overline{\Delta TVE}$ and the time difference is given by:

$$\overline{\Delta TVE} = \frac{\sum \Delta t_i}{\sum T_i} V_{pc} = \frac{\sum \Delta t_i}{NnT} V_{pc} = \frac{\overline{\Delta t}}{T} \times \frac{V_{pc}}{n}$$

where:

V_{pc} is the amplitude of the C1 and C2 signals

T_i is the actual length of the read-out signal in the range 3T to 14T

$n.T$ is the weighted average value of the actual lengths

$N.n.T$ is the total averaging time.

The specification for the tracking gain can now be rewritten by using the tracking error amplitude as follows:

$$0,50 \times \left(\frac{V_{pc}}{n} \right) \leq \overline{\Delta TVE} \leq 1,10 \times \left(\frac{V_{pc}}{n} \right) \quad \text{at } 0,1 \mu\text{m radial offset.}$$

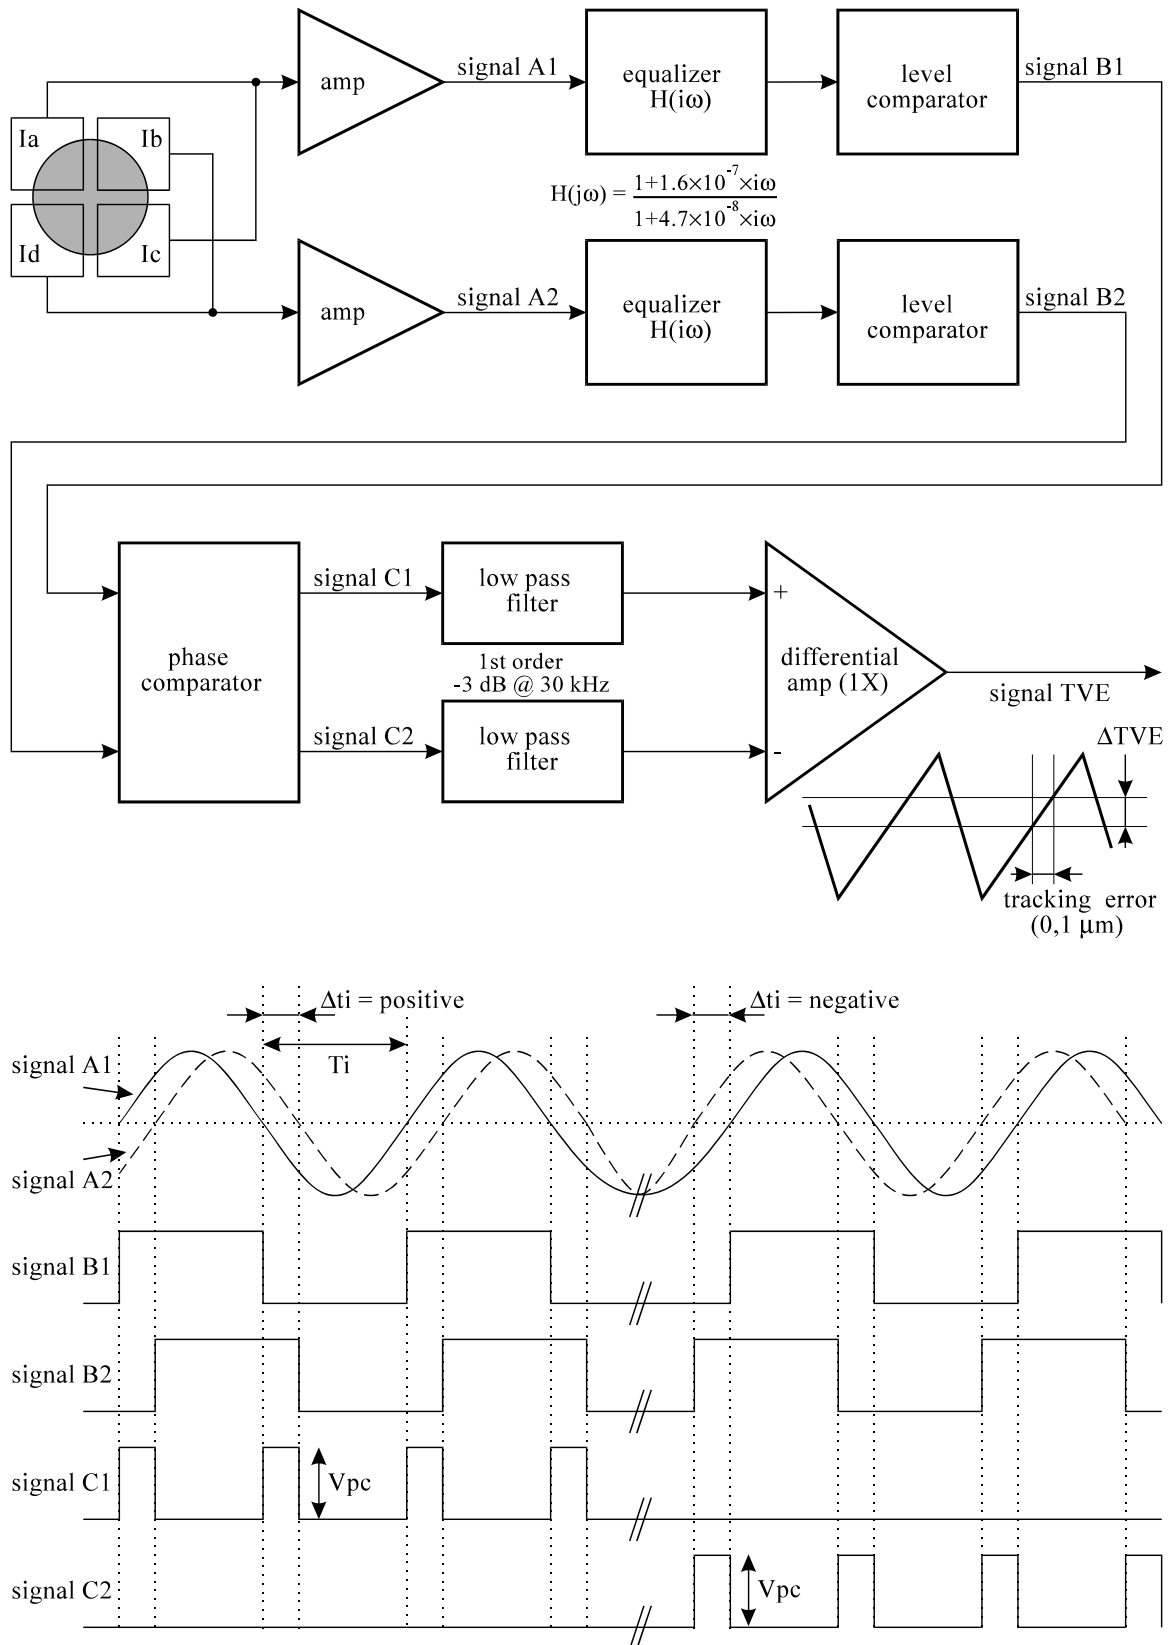


Figure F.1 - Circuit for tracking error measurements

F.3 Calibration of the circuit

Assuming that V_{pc} equals ≈ 5 V and that the measured value of n equals ≈ 5 , then the above relation between the tracking error amplitude $\overline{\Delta TVE}$ and the time difference $\overline{\Delta t}$ can be simplified to:

$$\overline{\Delta TVE} = \frac{\overline{\Delta t}}{T} \times \frac{V_{pc}}{n} \approx \frac{\overline{\Delta t}}{T}$$

The average runlength n of the 8-to-16 modulated signal is depending on the data content and the averaging time. Therefore the circuit shall be calibrated with a fixed frequency signal, corresponding to a modulated signal with $5T$ runlengths. For this purpose sinusoidal signals with a frequency of 2,616 MHz can be used.

Typically the pulses of signals C1 and C2 will be generated by some digital gate circuit with an output signal switching between ground and the supply voltage. This voltage swing is assumed to be about 5 volts, however, depending on the applied technology, it may deviate from 5 volts significantly.

Because the formal specification for the DPD signal is:

$$0,50 \leq \frac{\overline{\Delta t}}{T} \leq 1,10 \quad \text{at } 0,1 \mu\text{m radial offset,}$$

the measurement by means of $\overline{\Delta TVE}$ is influenced by the actual values of V_{pc} and n . Therefore the following calibration procedure shall be applied.

F.3.1 Saturation of comparators

Make sure that the gain of the level comparators is such that for all actual input signal levels, the signals B1 and B2 are square wave signals. In this case the amplitude of the signal TVE is independent of the amplitude of the input signals.

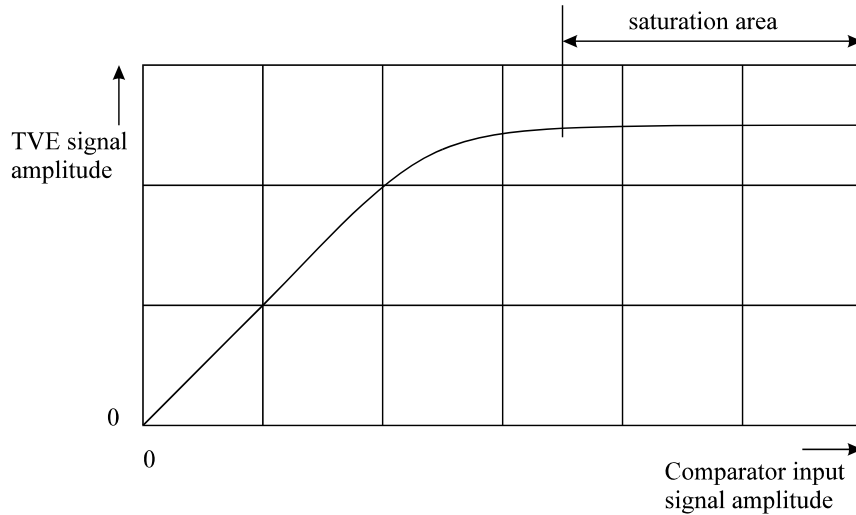


Figure F.2 - Tracking error signal amplitude versus comparator input signal amplitude

F.3.2 Correction for n and Vpc

Because of the above mentioned deviations of n and Vpc, and possibly some other circuit parameters, a correction factor K has to be determined, such that:

$$\overline{\Delta t} / T (\text{real}) = K \times \overline{\Delta TVE} (\text{measured}).$$

This can be achieved in the following way:

a) Generate two sinusoidal signals A1 and A2 of frequency 2,616 MHz with a phase difference, and inject them into the two equalizer circuits.

b) Measure the relation between $\overline{\Delta t} / T$ and $\overline{\Delta TVE}$, and determine K from figure F.3:

$$K = \frac{\overline{\Delta t} / T (\text{injected})}{\overline{\Delta TVE} (\text{measured})}. \text{ Now the set-up is ready for use.}$$

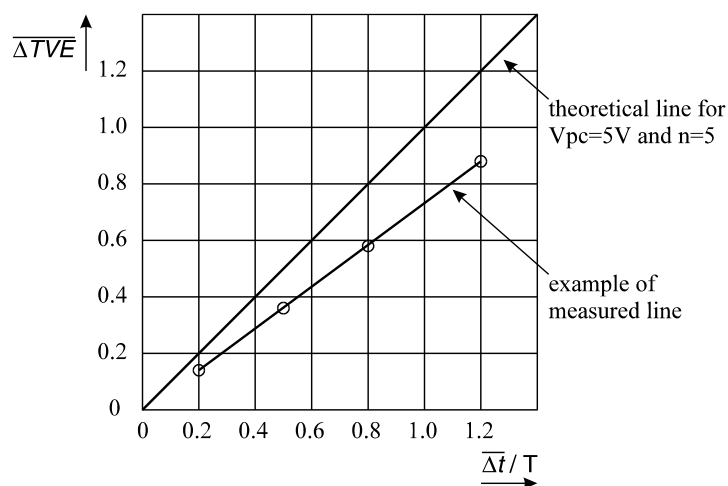


Figure F.3 - $\overline{\Delta TVE}$ versus $\overline{\Delta t} / T$

Annex G The write pulse wave form for testing (normative)

For different speed ranges, different write strategies can be used. This version of this document specifies 3 options:

- a pulsed write strategy, where each single mark is created by a number of subsequent separated short pulses,
- a blocked write strategy, where each single mark is created by one continuous pulse,
- a Castle write strategy, where each single mark is created by one continuous pulse with a power emphasis at the beginning and at the end of the pulse.

G.1 Pulsed write strategy

The write pulse waveform obtained from the NRZI data and the channel clock is shown in figure G.1. It consists of $N-2$ pulses, where N is the length of the NRZI pulse expressed in channel clock cycles.

The write pulse waveform for writing marks of length $N = 3$ consists of only the top pulse (T_{top}).

The write pulse waveform for writing marks of length $N \geq 4$ consist of the top pulse (T_{top}), $N-4$ multi-pulses (T_{mp}) and the last pulse (T_{lp}).

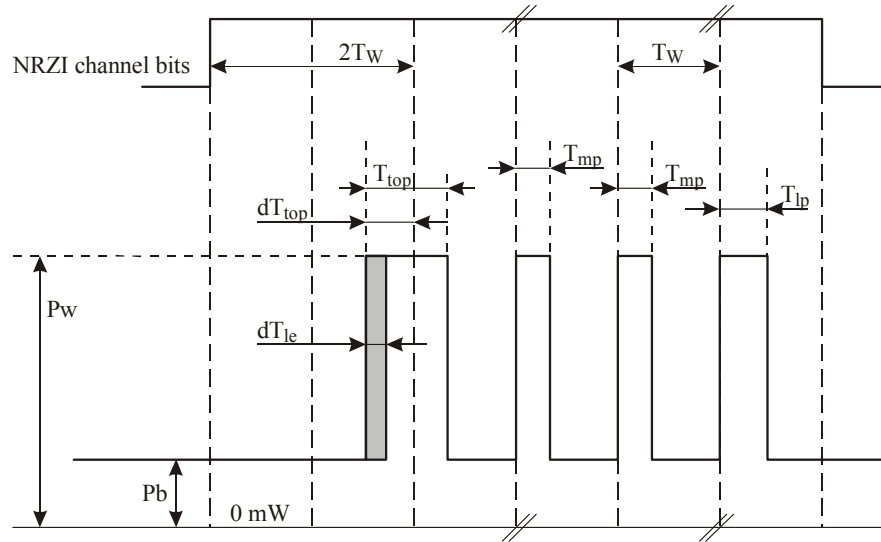


Figure G.1 - Write pulse waveform

The nominal pulse width times T_{mp} and T_{lp} shall be as indicated in the Physical format information in Table 3 and in 14.4.2.2. The duration can be dependent on the writing speed:

$$T_{mp} = m \times \frac{1}{16} T_W \quad \text{with } m = 4, 5, \dots \text{ or } 14 \quad (0,25 T_W \leq T_{mp} \leq 0,875 T_W)$$

$$T_{lp} = n \times \frac{1}{16} T_W \quad \text{with } n = 4, 5, \dots \text{ or } 24 \quad (0,25 T_W \leq T_{lp} \leq 1,5 T_W)$$

The laser power shall be switched to bias level between each pair of separated pulses for at least $\frac{2}{16} T_W$.

The nominal pulse width time T_{top} is dependent upon the length of the current mark (cm). It shall be as indicated in the Physical format information in Table 3 and in 14.4.2.2. The duration can also be dependent on the writing speed:

$$T_{top} (\text{cm} = 3T) = i \times \frac{1}{16} T_W \quad \text{with } i = 4, 5, \dots \text{ or } 40 \quad (0,25 T_W \leq T_{top} \leq 2,5 T_W)$$

$$T_{top} (\text{cm} \geq 4T) = j \times \frac{1}{16} T_W \quad \text{with } j = 4, 5, \dots \text{ or } 40 \quad (0,25 T_W \leq T_{top} \leq 2,5 T_W)$$

The nominal first pulse lead-time dT_{top} relative to the trailing edge of the second Channel bit of the NRZI data pulse, is dependent upon the length of the current mark (cm). It shall be as indicated in the Physical format information in Table 3 and in 14.4.2.2. The value of dT_{top} can also be dependent on the writing speed:

$$dT_{top} (cm = 3T) = p \times \frac{1}{16} T_W \quad \text{with } p = 0, 1, \dots \text{ or } 24 \quad (0,0 T_W \leq dT_{top} (cm = 3T) \leq 1,5 T_W)$$

$$dT_{top} (cm \geq 4T) = q \times \frac{1}{16} T_W \quad \text{with } q = 0, 1, \dots \text{ or } 24 \quad (0,0 T_W \leq dT_{top} (cm \geq 4T) \leq 1,5 T_W)$$

With the individual values for $T_{top} (cm = 3T)$ and $dT_{top} (cm = 3T)$, the 3T mark can be enhanced and shifted for optimum resulting jitter. The widening of the 3T write pulse is: $\Delta T = \{T_{top} (cm = 3T) - T_{top} (cm \geq 4T)\}$ and the shift of the 3T write pulse is: $\delta T = \{dT_{top} (cm = 3T) - dT_{top} (cm \geq 4T)\}$.

In principle the shift δT and the widening ΔT of the 3T pulse can be chosen independently. However because of limitations in certain implementations, for this version of this document there is one exception:

if a shift of the 3T pulse is needed, such a shift shall be combined with a widening resulting in a symmetrical change of the 3T write pulse. Or in mathematical terms: if $\delta T \neq 0$, then ΔT shall be $= 2 \times \delta T$ (see Figure G.2).

The position of the leading edge and hence the length of the first pulse may be corrected by dT_{le} dependent upon the length of the previous space (ps). This feature is called “thermal balancing”. dT_{le} shall be as indicated in the Physical format information in Table 3 and in 14.4.2.2. If the previous space is ≥ 4 channel clock cycles, then dT_{le} shall be 0. The value of dT_{le} can be dependent on the writing speed:

$$dT_{le} (ps = 3T) = u \times \frac{1}{16} T_W \quad \text{with } u = 0, 1, \dots \text{ or } 4 \quad (0,0 T_W \leq dT_{le} \leq 0,25 T_W)$$

(dT_{le} will give a delay and reduce the length of the first pulse as indicated in Figure G.1)

The values for P_w , and P_b are determined according to the OPC algorithm (see Annex I). An example of the write pulse waveform is shown in figure G.2.

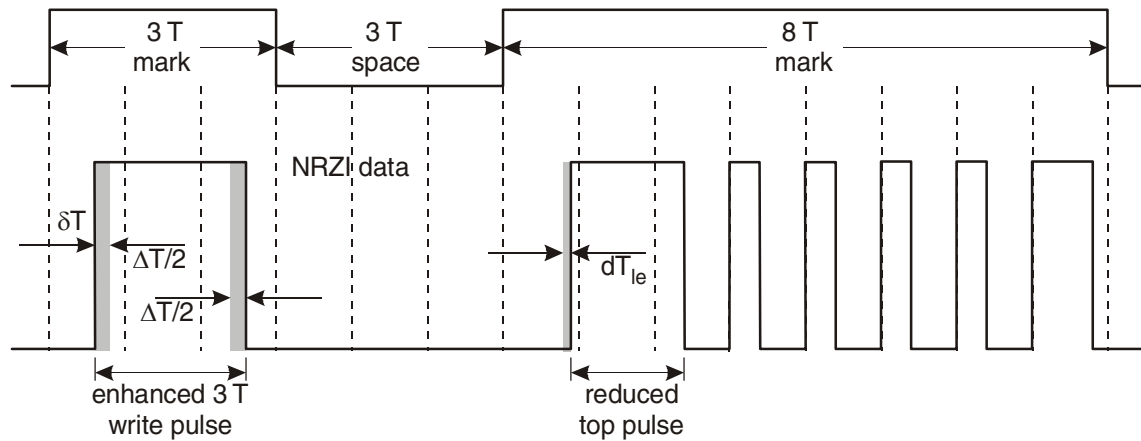


Figure G.2 - Example of a Multiple-pulse

G.2 Blocked write strategy

The waveform for the blocked write strategy (see Figure G.3) is derived from the waveform for the pulsed write strategy by setting T_{mp} equal to T_W ($m = 16$) and setting $T_{top}(cm \geq 4T)$ equal to $dT_{top} + T_W$ ($j = q + 16$). $T_{top}(cm=3T)$ can be optimised individually.

The write pulse waveform for writing marks of length $N = 3$ is a pulse with a length $T_{top}(cm=3T)$.

The write pulse waveform for writing marks of length $N \geq 4$ is a pulse with a length $dT_{top}(cm \geq 4T) + (N-3) \times T_W + T_{lp}$.

Especially at higher recording speeds, optimum cooling down of the recording layer after writing a mark may be needed. For this purpose the bias power shall be switched to P_c between the trailing edge of the write pulse and a quarter of the second Channel bit after the trailing edge of the NRZI data pulse. P_c shall be $\leq 0,1$ mW.

At higher recording speeds with a blocked write strategy also a power enhancement for the shorter marks might be needed. The additional power dP_w shall only be applied for the 3T and 4T marks and shall extend over the full width of the write pulse waveform (see Figures G.3 and G.4). It shall be as indicated in the Physical format information in Table 5 and in 14.4.2.3.1.

$$dP_w (cm = 3T) = \frac{y}{200} \times P_w \quad \text{with } y = 0, 1, \dots \text{ or } 100 \quad (0,00 P_w \leq dP_w \leq 0,50 P_w)$$

$$dP_w (cm = 4T) = \frac{z}{200} \times P_w \quad \text{with } z = 0, 1, \dots \text{ or } 100 \quad (0,00 P_w \leq dP_w \leq 0,50 P_w)$$

$$dP_w (cm \geq 5T) = 0$$

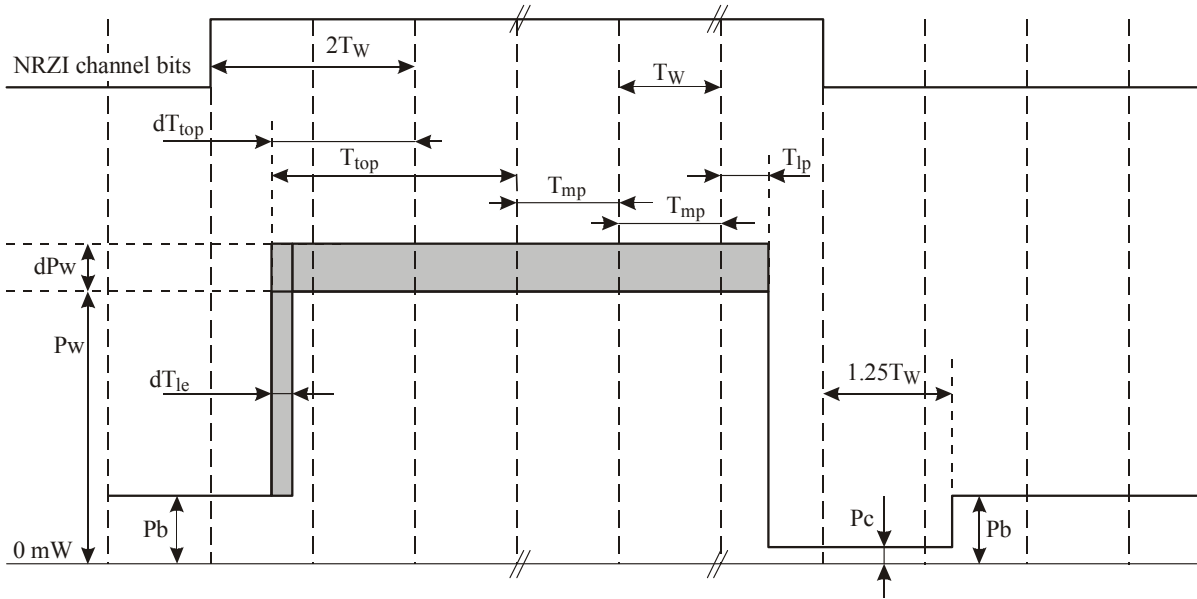


Figure G.3 – General blocked waveform

The nominal pulse width times T_{mp} and T_{lp} shall be as indicated in the Physical format information in Table 5 and in 14.4.2.3.1. The duration can be dependent on the writing speed:

$$T_{mp} = m \times \frac{1}{16} T_W \quad \text{with } m = 16 \quad (T_{mp} = 1,0 T_W)$$

$$T_{lp} = n \times \frac{1}{16} T_W \quad \text{with } n = 0, 1, \dots \text{ or } 16 \quad (0,0 T_W \leq T_{lp} \leq 1,0 T_W)$$

The nominal pulse width time T_{top} , is dependent upon the length of the current mark (cm). It shall be as indicated in the Physical format information in Table 5 and in 14.4.2.3.1. The duration can also be dependent on the writing speed:

$$T_{top} (cm = 3T) = i \times \frac{1}{16} T_W \quad \text{with } i = 16, 17, \dots \text{ or } 48 \quad (1 T_W \leq T_{top} \leq 3 T_W)$$

$$T_{top} (cm \geq 4T) = j \times \frac{1}{16} T_W \quad \text{with } j = 16, 17, \dots \text{ or } 48 \quad (1 T_W \leq T_{top} \leq 3 T_W)$$

$$(j = q + 16, \text{ see at } dT_{top})$$

The nominal first pulse lead-time dT_{top} relative to the trailing edge of the second Channel bit of the NRZI data pulse, is dependent upon the length of the current mark (cm). It shall be as indicated in the Physical format information in Table 5 and in 14.4.2.3.1. The value of dT_{top} can also be dependent on the writing speed:

$$dT_{top} (cm = 3T) = p \times \frac{1}{16} T_W \quad \text{with } p = 0, 1, \dots \text{ or } 32 \quad (0,0 T_W \leq dT_{top} (cm = 3T) \leq 2 T_W)$$

$$dT_{top} (cm \geq 4T) = q \times \frac{1}{16} T_W \quad \text{with } q = 0, 1, \dots \text{ or } 32 \quad (0,0 T_W \leq dT_{top} (cm \geq 4T) \leq 2 T_W)$$

$$(q = j - 16, \text{ see at } T_{top})$$

With the individual values for $T_{top} (cm = 3T)$ and $dT_{top} (cm = 3T)$ the 3T mark can be adapted and shifted for optimum resulting jitter. The relative shift of the 3T write pulse is: $\delta T = \{dT_{top} (cm = 3T) - dT_{top} (cm \geq 4T)\}$.

The position of the leading edge and hence the length of the first pulse may be corrected by dT_{le} dependent upon the length of the previous space (ps). This feature is called “thermal balancing”. dT_{le} shall be as indicated in the Physical format information in Table 5 and in 14.4.2.3.1. If the previous space is ≥ 4 channel clock cycles, then dT_{le} shall be 0. The value of dT_{le} can be dependent on the writing speed:

$$dT_{le} (ps = 3T) = u \times \frac{1}{16} T_W \quad \text{with } u = 0, 1, \dots \text{ or } 4 \quad (0,0 T_W \leq dT_{le} \leq 0,25 T_W)$$

(dT_{le} will give a delay and reduce the length of the first pulse as indicated in Figure G.3)

The values for P_w , and P_b are determined according to the OPC algorithm (see Annex I). An example of the write pulse waveform is shown in figure G.4.

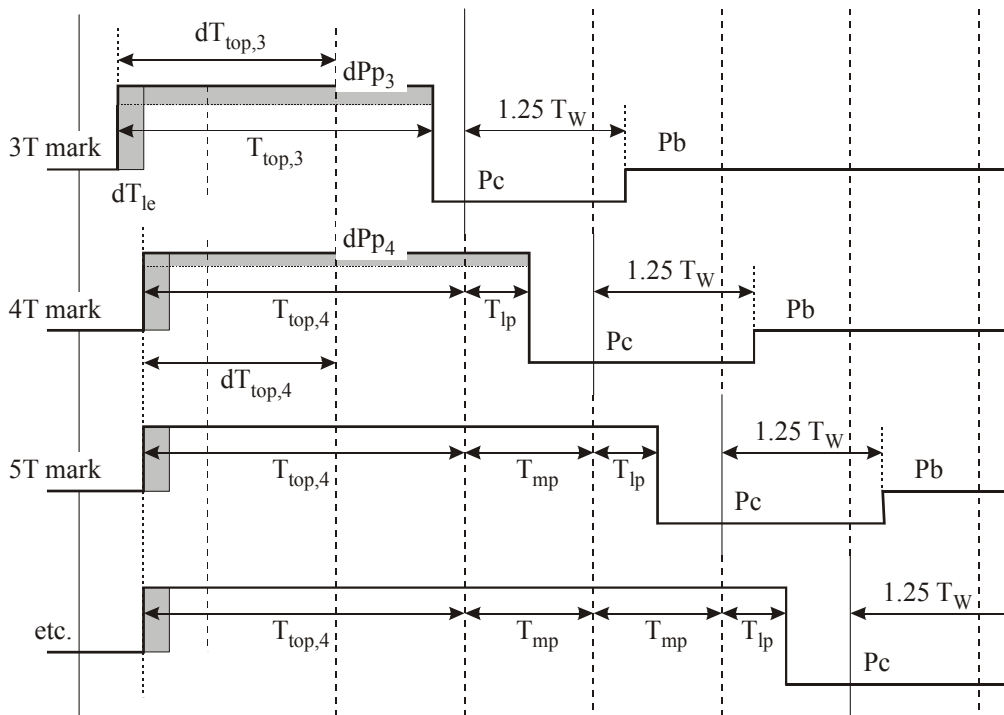


Figure G.4 - Examples of a “blocked” waveform

G.3 Castle write strategy

The write pulse waveform obtained from the NRZI data and the channel clock is shown in figure G.5. It consists of an uninterrupted pulse with a power boost at the beginning and at the end.

The write pulse waveform for writing marks of length $N = 3$ is a pulse with a length T_{I3} .

The write pulse waveform for writing marks of length $N \geq 4$ is a pulse with a length $T_{I3} + (N-3) \times T_W$.

The additional power dP_w shall be applied during the whole write pulse for the 3T mark (T_{I3}) and during T_{top} and T_{end} at the beginning respectively at the end of the write pulses for the $\geq 4T$ marks. It shall be as indicated in the Physical format information in Table 6 and in 14.4.2.3.2.

$$dP_w = \frac{y}{200} \times P_w \quad \text{with } y = 0, 1, \dots \text{ or } 255 \quad (0,00 P_w \leq dP_w \leq 1,275 P_w)$$

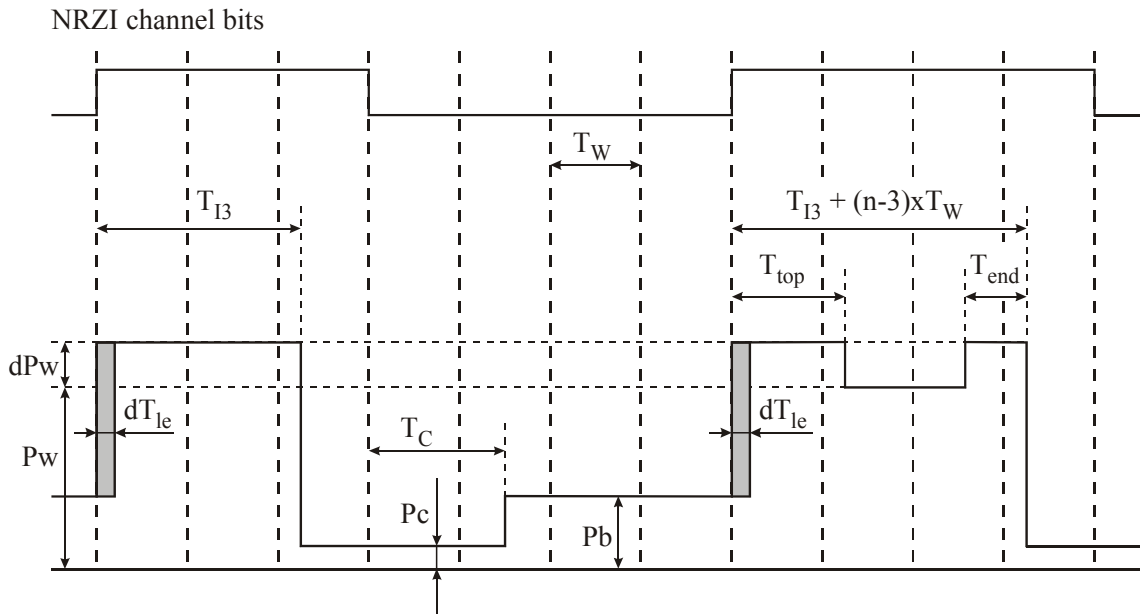


Figure G.5 – General Castle waveform

The nominal pulse width time T_{I3} shall be as indicated in the Physical format information in Table 6 and in 14.4.2.3.2. The duration can be dependent on the writing speed:

$$T_{I3} = k \times \frac{1}{16} T_W \quad \text{with } k = 16, 17, \dots \text{ or } 48 \quad (1,0 T_W \leq T_{I3} \leq 3,0 T_W)$$

The nominal pulse width time T_{top} shall be as indicated in the Physical format information in Table 6 and in 14.4.2.3.2. The duration can be dependent on the writing speed:

$$T_{top} = i \times \frac{1}{16} T_W \quad \text{with } i = 4, 5, \dots \text{ or } 32 \quad (0,25 T_W \leq T_{top} \leq 2,0 T_W)$$

The nominal pulse width time T_{end} , is dependent upon the length of the current mark (cm). It shall be as indicated in the Physical format information in Table 6 and in 14.4.2.3.2. The duration can also be dependent on the writing speed:

$$T_{end} (cm = 4T) = m \times \frac{1}{16} T_W \quad \text{with } m = 4, 5, \dots \text{ or } 32 \quad (0,25 T_W \leq T_{end} \leq 2,0 T_W)$$

$$T_{end} (cm \geq 5T) = n \times \frac{1}{16} T_W \quad \text{with } n = 4, 5, \dots \text{ or } 32 \quad (0,25 T_W \leq T_{end} \leq 2,0 T_W)$$

Because of limitations in certain implementations, the following constraints shall be kept until further notice:

$$T_{end} (\text{any mark}) < T_{I3} \quad \text{and} \quad T_{I3} + (n-3) \times T_W - T_{top} - T_{end} (cm = n) \geq \frac{4}{16} T_W \quad \text{for each } n \geq 4$$

(the power level P_w shall be kept for at least $0,25 T_W$)

The position of the leading edge and hence the start position of the pulse may be corrected by dT_{le} dependent upon the length of the previous space (ps). This feature is called “thermal balancing”. dT_{le} shall be as indicated in the Physical format information in Table 6 and Table 7 and in 14.4.2.3.2 and 14.4.2.3.3. If the previous space is ≥ 4 channel clock cycles, then dT_{le} shall be 0. The value of dT_{le} can be dependent on the writing speed:

$$dT_{le} (ps = 3T) = u \times \frac{1}{16} T_W \quad \text{with } u = 0, 1, \dots \text{ or } 4 \quad (0,0 T_W \leq dT_{le} \leq 0,25 T_W)$$

(dT_{le} will give a delay and reduce the length of the pulse as indicated in Figure G.5)

At high recording speeds, optimum cooling down of the recording layer after writing a mark is needed. For this purpose the bias power shall be switched to P_c between the trailing edge of the write pulse and T_C after the trailing edge of the NRZI data pulse. P_c shall be $\leq 0,1$ mW. T_C shall be as indicated in the Physical format information in Table 6 and in 14.4.2.3.2. The value of T_C can be dependent on the writing speed:

$$T_C = v \times \frac{1}{16} T_W \quad \text{with } v = 16, 17, \dots \text{ or } V \quad (1,0 T_W \leq T_C \leq V/16 T_W)$$

($V = 32$ or 40 depending on the applied write strategy; see 14.4.2.3.2 and 14.4.2.3.3)

Note: The length of the cooling gap might have some influence on the position of the leading edge of the next written mark, especially in the case of a short space. Therefore some fine-tuning between dT_{le} and T_C possibly could improve the recording characteristics of the disc.

The values for P_w and P_b are determined according to the OPC algorithm (see Annex I). An example of the write pulse waveform is shown in figure G.6.

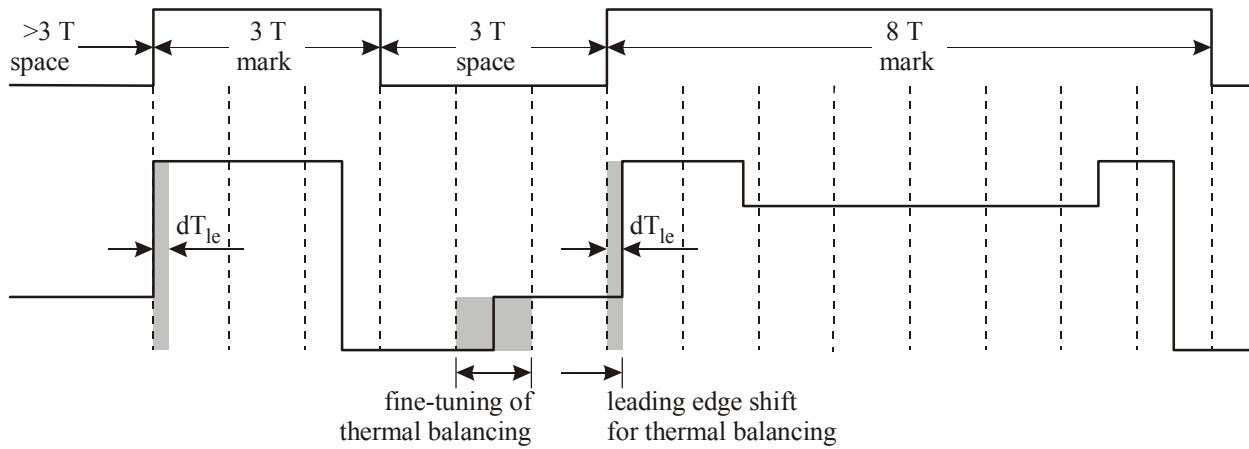


Figure G.6 - Example of a Castle waveform

G.4 Rise and fall times

The rise times, T_r , and fall times, T_f , as specified in figure G.7 shall not exceed 2 ns.
Possible overshoots shall be $< 20\%$ of the step size P .

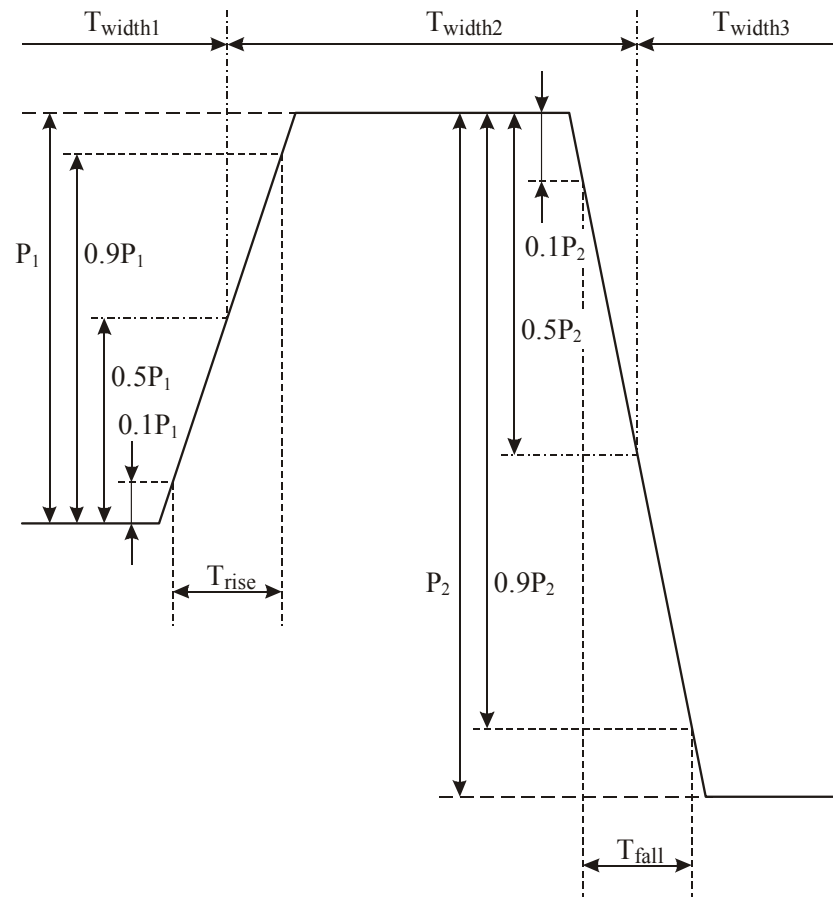



Figure G.7 - Rise Times and Fall Times

This page is intentionally left blank

Annex H 8-to-16 Modulation

(normative)

8-to-16 modulation shall satisfy RLL(2,10) requirements. The encoding system is shown in figure H.1 with the conversion tables shown in table H.1 and table H.2.

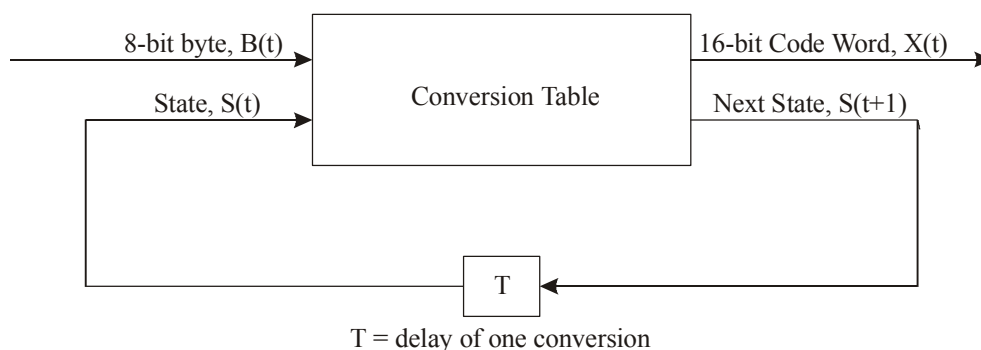

Where:

$$X(t) = H\{B(t), S(t)\} \quad X_{15}(t) = \text{msb and } X_0(t) = \text{lsb}$$

$$S(t+1) = G\{B(t), S(t)\}$$

H is the output function from the conversion tables

G is the next-state function from the conversion tables

Figure H.1 - Code Word generating system

The States of the Code Words, $X(t)$, shall be chosen to satisfy the RLL(2,10) requirements of a minimum of 2 ZEROs and a maximum of 10 ZEROs between ONES of adjacent Code Words.

Code Word $X(t)$	Next State $S(t+1)$	Code Word $X(t+1)$
Ends with 1 or no trailing ZEROs	State 1	Starts with 2 to 9 leading ZEROs
Ends with 2 to 5 trailing ZEROs	State 2	Starts with 1 or up to 5 leading ZEROs and $X_{15}(t+1), X_3(t+1) = 0,0$
Ends with 2 to 5 trailing ZEROs	State 3	Starts with none or up to 5 leading ZEROs and $X_{15}(t+1), X_3(t+1) \neq 0,0$
Ends with 6 to 9 trailing ZEROs	State 4	Starts with 1 or no leading ZEROs

Figure H.2 - Determination of States

Note that when decoding the recorded data, knowledge about the encoder is required to be able to reconstitute the original bytes.

$$B(t) = H^{-1}\{X(t), S(t)\}$$

Because of the involved error propagation, such state-dependent decoding is to be avoided. In the case of this 8-to-16 modulation, the conversion tables have been chosen in such a way that knowledge about the State is not required in most cases. As can be gathered from the tables, in some cases, two 8-bit bytes, for instance the 8-bit bytes 5 and 6 in States 1 and 2 in table H.1 generate the same 16-bit Code Words. The construction of the tables allows to solve this apparent ambiguity. Indeed, if two identical Code Words leave a State, one of them goes to State 2 and the other to State 3. Because the setting of bits X_{15} and X_3 is always different in these two States, any Code Word can be uniquely decoded by analysing the Code Word itself together with bits X_{15} and X_3 of the next Code Word :

$$B(t) = H^{-1} \{ X(t), X_{15}(t+1), X_3(t+1) \}$$

The Substitution table, table H.2, is included to insure meeting the DCC requirements of 13.8.

Table H.1 - Main Conversion Table

8-bit byte	State 1			State 2			State 3			State 4		
	Code Word		Next State	Code Word		Next State	Code Word		Next State	Code Word		Next State
	msb	lsb		msb	lsb		msb	lsb		msb	lsb	
0	0010000000001001	1		0100000100100000	2		0010000000001001	1		0100000100100000	2	
1	0010000000010010	1		0010000000010010	1		1000000100100000	3		1000000100100000	3	
2	0010000100100000	2		0010000100100000	2		1000000000010010	1		1000000000010010	1	
3	0010000001001000	2		0100010010000000	4		0010000001001000	2		0100010010000000	4	
4	0010000001001000	2		0010000001001000	2		1000000100100000	2		1000000100100000	2	
5	0010000000010010	2		0010000000010010	2		1001001000000000	4		1001001000000000	4	
6	0010000000010010	3		0010000000010010	3		1000100100000000	4		1000100100000000	4	
7	0010000001001000	3		0100000000010010	1		0010000001001000	3		0100000000010010	1	
8	0010000001001000	3		0010000001001000	3		1000010010000000	4		1000010010000000	4	
9	0010000100100000	3		0010000100100000	3		1001001000000001	1		1001001000000001	1	
10	0010010010000000	4		0010010010000000	4		1000100100000001	1		1000100100000001	1	
11	0010001001000000	4		0010001001000000	4		1000000010010000	3		1000000010010000	3	
12	0010010010000001	1		0010010010000001	1		1000000010010000	2		1000000010010000	2	
13	0010001001000001	1		0010001001000001	1		1000010010000001	1		1000010010000001	1	
14	0010000001001001	1		0100000000010010	3		0010000001001001	1		0100000000010010	3	
15	0010000100100001	1		0010000100100001	1		1000001001000001	1		1000001001000001	1	
16	0010000001001001	1		0010000001001001	1		1000000100100001	1		1000000100100001	1	
17	0010000000010010	1		0010000000010010	1		1000001001000000	4		1000001001000000	4	
18	00010000000001001	1		0100000001001000	2		00010000000001001	1		0100000001001000	2	
19	00100000000001001	1		00100000000001001	1		1001000100000000	4		1001000100000000	4	
20	0001000000010010	1		0001000000010010	1		1000100010000000	4		1000100010000000	4	
21	00001000000000010	1		00001000000000010	1		10000000010010001	1		10000000010010001	1	
22	00000100000000001	1		00000100000000001	1		1000000001001001	1		1000000001001001	1	
23	0010001000100000	2		0010001000100000	2		1000000001001000	2		1000000001001000	2	
24	0010000100010000	2		0010000100010000	2		1000000001001000	3		1000000001001000	3	
25	00100000010001000	2		0100000000010010	2		00100000010001000	2		0100000000010010	2	
26	0010000001000100	2		0010000001000100	2		1000000000100010	1		1000000000100010	1	
27	0001000100100000	2		0001000100100000	2		1000000000010001	1		1000000000010001	1	
28	0010000000001000	2		0100000001001000	3		0010000000001000	2		0100000001001000	3	
29	0001000010010000	2		0001000010010000	2		10010010000000010	1		10010010000000010	1	
30	0001000001001000	2		0100000100100000	3		0001000001001000	2		0100000100100000	3	
31	0001000000010010	2		0001000000010010	2		1001000100000001	1		1001000100000001	1	
32	0001000000000100	2		0001000000000100	2		10001001000000010	1		10001001000000010	1	
33	0001000000000100	3		0001000000000100	3		1000100010000001	1		1000100010000001	1	
34	0001000000010010	3		0001000000010010	3		1000000000010010	2		1000000000010010	2	
35	0001000001001000	3		0100001001000000	4		0001000001001000	3		0100001001000000	4	
36	0001000001001000	3		0001000001001000	3		1000000000010010	3		1000000000010010	3	
37	0001000100100000	3		0001000100100000	3		1000010001000000	4		1000010001000000	4	
38	00100000000001000	3		0100100100000001	1		00100000000001000	3		0100100100000001	1	
39	0010000001000100	3		0010000001000100	3		1001000010000000	4		1001000010000000	4	
40	0010000001000100	3		0100010010000001	1		00100000010001000	3		0100010010000001	1	

8-bit byte	State 1			State 2			State 3			State 4		
	Code Word		Next State	Code Word		Next State	Code Word		Next State	Code Word		Next State
	msb	lsb		msb	lsb		msb	lsb		msb	lsb	
41	0010000100010000		3	0010000100010000		3	1000010010000010		1	1000010010000010		1
42	0010000100010000		3	0010000100010000		3	1000001000100000		2	1000001000100000		2
43	0010010001000000		4	0010010001000000		4	1000010001000001		1	1000010001000001		1
44	0001001001000000		4	0001001001000000		4	1000001000100000		3	1000001000100000		3
45	0000001000000001		1	0100010001000000		4	1000001001000010		1	0100010001000000		4
46	0010010010000010		1	0010010010000010		1	1000001000100001		1	1000001000100001		1
47	0010000010001001		1	0100001001000001		1	0010000010001001		1	0100001001000001		1
48	0010010001000001		1	0010010001000001		1	1000000100010000		2	1000000100010000		2
49	0010001001000010		1	0010001001000010		1	1000000010001000		2	1000000010001000		2
50	0010001000100001		1	0010001000100001		1	1000000100010000		3	1000000100010000		3
51	0001000001001001		1	0100000100100001		1	0001000001001001		1	0100000100100001		1
52	0010000100100010		1	0010000100100010		1	1000000100100010		1	1000000100100010		1
53	0010000100010001		1	0010000100010001		1	1000000100010001		1	1000000100010001		1
54	0010000010010010		1	0010000010010010		1	1000000010010010		1	1000000010010010		1
55	0010000001000010		1	0010000001000010		1	1000000010001001		1	1000000010001001		1
56	0010000000100001		1	0010000000100001		1	1000000001000010		1	1000000001000010		1
57	0000100000001001		1	0100000010010001		1	0000100000001001		1	0100000010010001		1
58	0001001001000001		1	0001001001000001		1	1000000000100001		1	1000000000100001		1
59	0001000100100001		1	0001000100100001		1	0100000001001001		1	0100000001001001		1
60	0001000010010001		1	0001000010010001		1	1001001000010010		1	1001001000010010		1
61	0001000000100010		1	0001000000100010		1	1001001000001001		1	1001001000001001		1
62	0001000000010001		1	0001000000010001		1	1001000100000010		1	1001000100000010		1
63	0000100000010010		1	0000100000010010		1	1000000001000100		2	1000000001000100		2
64	0000010000000010		1	0000010000000010		1	0100000001001000		2	0100000001001000		2
65	0010010000100000		2	0010010000100000		2	1000010000100000		2	1000010000100000		2
66	0010001000010000		2	0010001000010000		2	1000001000010000		2	1000001000010000		2
67	0010000100001000		2	0100000000100010		1	0010000100001000		2	0100000000100010		1
68	0010000010000100		2	0010000010000100		2	1000000100001000		2	1000000100001000		2
69	0010000000010000		2	0010000000010000		2	1000000010000100		2	1000000010000100		2
70	0001000010001000		2	0100001000100000		2	0001000010001000		2	0100001000100000		2
71	0001001000100000		2	0001001000100000		2	0100000010001000		2	0100000010001000		2
72	0001000000001000		2	0100000100010000		2	0001000000001000		2	0100000100010000		2
73	0001000100010000		2	0001000100010000		2	1000000001000100		3	1000000001000100		3
74	0001000001000100		2	0001000001000100		2	0100000001001000		3	0100000001001000		3
75	0000100100100000		2	0000100100100000		2	1000010000100000		3	1000010000100000		3
76	0000100010010000		2	0000100010010000		2	1000001000010000		3	1000001000010000		3
77	0000100001001000		2	0100000001000100		2	0000100001001000		2	0100000001000100		2
78	0000100000100100		2	0000100000100100		2	1000000100001000		3	1000000100001000		3
79	0000100000000100		2	0000100000000100		2	1000000010000100		3	1000000010000100		3
80	0000100000000010		3	0000100000000010		3	0100000010001000		3	0100000010001000		3
81	0000100000100100		3	0000100000100100		3	1000100001000000		4	1000100001000000		4
82	0000100001001000		3	0100000001000100		3	0000100001001000		3	0100000001000100		3
83	0000100010010000		3	0000100010010000		3	1000000010001000		3	1000000010001000		3
84	0000100100100000		3	0000100100100000		3	1001001001001000		2	1001001001001000		2
85	0001000000001000		3	0100000100010000		3	0001000000001000		3	0100000100010000		3
86	0001000001000100		3	0001000001000100		3	1001001000100100		2	1001001000100100		2
87	0001000010001000		3	0100001000100000		3	0001000010001000		3	0100001000100000		3
88	0001000100010000		3	0001000100010000		3	1001001001001000		3	1001001001001000		3
89	0001001000100000		3	0001001000100000		3	1001000010000001		1	1001000010000001		1
90	0010000000010000		3	0010000000010000		3	1000100100010010		1	1000100100010010		1
91	0010000010000100		3	0010000010000100		3	1000100100001001		1	1000100100001001		1
92	0010000100001000		3	0100000000010001		1	0010000100001000		3	0100000000010001		1
93	0010001000010000		3	0010001000010000		3	1000100010000010		1	1000100010000010		1
94	0010010000100000		3	0010010000100000		3	1000100001000001		1	1000100001000001		1
95	0000001000000010		1	0100100100000010		1	1000010010010010		1	0100100100000010		1

8-bit byte	State 1			State 2			State 3			State 4		
	Code Word		Next State	Code Word		Next State	Code Word		Next State	Code Word		Next State
	msb	lsb		msb	lsb		msb	lsb		msb	lsb	
96	00000001	10000000	1	01001000	10000001	1	10000100	10001001	1	01001000	10000001	1
97	00100100	10001001	1	01000100	00001000	2	00100100	10001001	1	01000100	00001000	2
98	00100100	10010010	1	00100100	10010010	1	10010010	00000010	2	10010010	00000010	2
99	00100100	10000010	1	00100100	10000010	1	10010010	00010010	3	10010010	00010010	3
100	00100100	00001000	1	00100100	00001000	1	10000100	10000010	1	10000100	10000010	1
101	00100010	10010010	1	01000100	10000010	1	00100010	10010010	1	01000100	10000010	1
102	00100010	10001000	1	00100010	10001000	1	10000100	00001000	1	10000100	00001000	1
103	00100010	00001000	1	00100010	00001000	1	10000010	10010010	1	10000010	10010010	1
104	00100000	10001001	1	00100000	10001001	1	10000010	00010001	1	10000010	00010001	1
105	00100000	10000010	1	00100000	10000010	1	10000010	00001001	1	10000010	00001001	1
106	00100000	10000100	1	01000010	00001000	2	00100000	10000100	1	01000010	00001000	2
107	00100000	10000001	1	00100000	10000001	1	10000001	00010010	1	10000001	00010010	1
108	00010010	10010000	1	00010010	10010000	1	10000001	00001001	1	10000001	00001001	1
109	00010010	00001000	1	00010010	00001000	1	10000000	10000010	1	10000000	10000010	1
110	00010001	10010001	1	00010001	10010001	1	10000000	10000001	1	10000000	10000001	1
111	00010001	00001000	1	00010001	00001000	1	01000000	10001001	1	01000000	10001001	1
112	00010000	10010010	1	00010000	10010010	1	10010010	10010010	1	10010010	10010010	1
113	00010000	10000010	1	00010000	10000010	1	10010010	00010001	1	10010010	00010001	1
114	00010000	10001001	1	01000100	00001000	3	00010000	10001001	1	01000100	00001000	3
115	00010000	00001000	1	00010000	00001000	1	10010010	00001000	1	10010010	00001000	1
116	00001001	10010000	1	00001001	10010000	1	10010001	00010010	1	10010001	00010010	1
117	00001000	10010001	1	00001000	10010001	1	10010001	00001001	1	10010001	00001001	1
118	00001000	00010010	1	01000100	10000001	1	00001000	00010010	1	01000100	10000001	1
119	00001000	00001000	1	00001000	00001000	1	10001001	10010010	2	10001001	10010010	2
120	00001000	00000010	1	00001000	00000010	1	10001001	00000010	2	10001001	00000010	2
121	00000100	00000001	1	01000010	10010001	1	00000100	00000001	1	01000010	10010001	1
122	00000100	00000100	1	00000100	00000100	1	10001000	00000000	2	10001000	00000000	2
123	00100100	10000100	2	00100100	10000100	2	10000100	10000100	2	10000100	10000100	2
124	00100100	00000100	2	00100100	00000100	2	10000100	00000100	2	10000100	00000100	2
125	00100010	00000010	2	01000010	00010000	1	00100010	00000010	2	01000010	00010000	1
126	00100010	10010001	2	00100010	10010001	2	10000010	10010001	2	10000010	10010001	2
127	00010001	00000100	2	01000001	10010001	1	00010001	00000100	2	01000001	10010001	1
128	00100001	10010010	2	00100001	10010010	2	10000010	00000100	2	10000010	00000100	2
129	00001000	10001000	2	01000001	00010001	1	00001000	10001000	2	01000001	00010001	1
130	00100001	00000010	2	00100001	00000010	2	10000001	10010010	2	10000001	10010010	2
131	00100000	00000000	2	00100000	00000000	2	10010010	00000010	3	10010010	00000010	3
132	00010010	00000100	2	00010010	00000100	2	10001001	10010010	3	10001001	10010010	3
133	00001000	00000000	2	01000000	10010010	1	00001000	00000000	2	01000000	10010010	1
134	00010000	10000100	2	00010000	10000100	2	10001000	00000100	3	10001000	00000100	3
135	00010000	00000000	2	00010000	00000000	2	10000100	10000010	3	10000100	10000010	3
136	00001001	00001000	2	00001001	00001000	2	10000100	00000100	3	10000100	00000100	3
137	00001000	10001001	2	00001000	10001001	2	10000010	10001001	3	10000010	10001001	3
138	00000100	00010010	2	01000000	00000100	1	00000100	00010010	2	01000000	00000100	1
139	00000100	10010000	2	00000100	10010000	2	10000010	00000100	3	10000010	00000100	3
140	00000100	00001001	2	00000100	00001001	2	10010000	00000100	1	10010000	00000100	1
141	00000100	00000000	2	00000100	00000000	2	10000001	00000100	2	10000001	00000100	2
142	00000100	00000000	3	00000100	00000000	3	10000001	10010010	3	10000001	10010010	3
143	00000100	00001001	3	00000100	00001001	3	10000001	00000100	3	10000001	00000100	3
144	00000100	10010000	3	01000000	10000100	2	00000100	10010000	3	01000000	10000100	2
145	00000100	10010000	3	00000100	10010000	3	10010000	00000000	4	10010000	00000000	4
146	00001000	00000000	3	01000000	00000000	2	00001000	00000000	3	01000000	00000000	2
147	00001000	10001001	3	00001000	10001001	3	10000000	00000000	2	10000000	00000000	2
148	00001000	10001000	3	01000000	10000100	3	00001000	10001000	3	01000000	10000100	3
149	00001001	00001000	3	00001001	00001000	3	10000000	00000000	3	10000000	00000000	3
150	00010000	00000000	3	00010000	00000000	3	01000001	00001000	3	01000001	00001000	3

8-bit byte	State 1			State 2			State 3			State 4		
	Code Word		Next State	Code Word		Next State	Code Word		Next State	Code Word		Next State
	msb	lsb		msb	lsb		msb	lsb		msb	lsb	
151	0001000010000100		3	0001000010000100		3	1000000001000000		4	1000000001000000		4
152	0001000100001000		3	0100001000010000		3	0001000100001000		3	0100001000010000		3
153	0001001000010000		3	0001001000010000		3	1001000001000001		1	1001000001000001		1
154	0010000000100000		3	0010000000100000		3	0100000100001000		2	0100000100001000		2
155	0010000100000100		3	0010000100000100		3	1001000100100100		3	1001000100100100		3
156	0010000100100100		3	0010000100100100		3	1000100100100010		1	1000100100100010		1
157	0010001000001000		3	0100000000100001		1	0010001000001000		3	0100000000100001		1
158	0010001001000100		3	0010001001000100		3	1000100100000100		3	0100100100000000		4
159	0010010000010000		3	0010010000010000		3	1001001001000100		2	1001001001000100		2
160	0010010010000100		3	0010010010000100		3	1001001000001000		2	1001001000001000		2
161	0000001000010010		1	0100000000010000		3	1000100100010001		1	0100000000010000		3
162	0000001000001001		1	0100100100100100		2	1000100010010010		1	0100100100100100		2
163	0000000100000010		1	0100100100100100		3	1000100010001001		1	0100100100100100		3
164	0000000010000001		1	0100100100010010		1	1000100001000010		1	0100100100010010		1
165	0010010010010001		1	0010010010010001		1	1001000100100100		2	1001000100100100		2
166	0010010000100010		1	0010010000100010		1	1001000100000100		2	1001000100000100		2
167	0010010001001001		1	0100100100000100		2	0010010001001001		1	0100100100000100		2
168	0010010000010001		1	0010010000010001		1	1001001001000100		3	1001001001000100		3
169	0010001000010010		1	0010001000010010		1	1000100000100001		1	1000100000100001		1
170	0010000100000010		1	0010000100000010		1	1000010010010001		1	1000010010010001		1
171	0010001000001001		1	0100100000100000		3	0010001000001001		1	0100100000100000		3
172	0010000010000001		1	0010000010000001		1	1000010001001001		1	1000010001001001		1
173	0001001000100010		1	0001001000100010		1	1000010000100010		1	1000010000100010		1
174	0001001000010001		1	0001001000010001		1	1000010000010001		1	1000010000010001		1
175	0001000100010010		1	0001000100010010		1	1000001000010010		1	1000001000010010		1
176	0001000010000010		1	0001000010000010		1	1000001000001001		1	1000001000001001		1
177	0001001001001001		1	0100100010000010		1	0001001001001001		1	0100100010000010		1
178	0001000001000001		1	0001000001000001		1	1000000100000010		1	1000000100000010		1
179	0000100100100010		1	0000100100100010		1	1000000010000001		1	1000000010000001		1
180	0000100100010001		1	0000100100010001		1	0100100100001001		1	0100100100001001		1
181	0001000100001001		1	0100100000100000		2	0001000100001001		1	0100100000100000		2
182	0000100010010010		1	0000100010010010		1	0100010010001001		1	0100010010001001		1
183	0000100001000010		1	0000100001000010		1	0100001001001001		1	0100001001001001		1
184	0000100010001001		1	0100010010000100		3	0000100010001001		1	0100010010000100		3
185	0000100000100001		1	0000100000100001		1	1001000000100000		2	1001000000100000		2
186	0000010010010001		1	0000010010010001		1	1000100100001000		2	1000100100001000		2
187	0000010000100010		1	0000010000100010		1	1000100010000100		2	1000100010000100		2
188	0000010001001001		1	0100100001000001		1	0000010001001001		1	0100100001000001		1
189	0000010000010001		1	0000010000010001		1	1000100000010000		2	1000100000010000		2
190	0000001001001000		2	0100010010000100		2	1000010010001000		2	0100010010000100		2
191	0000001000100100		2	0100010000010000		2	1000010001000100		2	0100010000010000		2
192	0000001000000100		2	0100001001000100		2	1000010000001000		2	0100001001000100		2
193	0010010010001000		2	0100010000010000		3	0010010010001000		2	0100010000010000		3
194	0010010001000100		2	0010010001000100		2	1000001001001000		2	1000001001001000		2
195	0010010000001000		2	0100010010010010		1	0010010000001000		2	0100010010010010		1
196	0010001000100100		2	0010001000100100		2	1000001000100100		2	1000001000100100		2
197	0010001000000100		2	0010001000000100		2	1000001000000100		2	1000001000000100		2
198	0010001001001000		2	0100010001000010		1	0010001001001000		2	0100010001000010		1
199	0001001001000100		2	0001001001000100		2	0100001000001000		2	0100001000001000		2
200	0001000100100100		2	0001000100100100		2	1001000000100000		3	1001000000100000		3
201	0001000100000100		2	0001000100000100		2	1000100100001000		3	1000100100001000		3
202	0001001000001000		2	0100010000100001		1	0001001000001000		2	0100010000100001		1
203	0001000000100000		2	0001000000100000		2	1000100010000100		3	1000100010000100		3
204	0000100010000100		2	0000100010000100		2	1000010010001000		3	1000010010001000		3
205	0000100000010000		2	0000100000010000		2	1000010001000100		3	1000010001000100		3

8-bit byte	State 1			State 2			State 3			State 4		
	Code Word		Next State	Code Word		Next State	Code Word		Next State	Code Word		Next State
	msb	lsb		msb	lsb		msb	lsb		msb	lsb	
206	0000100100001000		2	0100001000100010		1	0000100100001000		2	0100001000100010		1
207	0000010010001000		2	0100001000010001		1	0000010010001000		2	0100001000010001		1
208	0000010001000100		2	0000010001000100		2	1000001000100100		3	1000001000100100		3
209	0000010000001000		2	0100000100010010		1	0000010000001000		2	0100000100010010		1
210	0000001000000100		3	0100000010000010		1	1000010000001000		3	0100000010000010		1
211	0000001000100100		3	0100000100100100		2	1000001001001000		3	0100000100100100		2
212	0000001001001000		3	0100000100000100		2	1000001000000100		3	0100000100000100		2
213	0000010000001000		3	0100000001000001		1	0000010000001000		3	0100000001000001		1
214	0000010001000100		3	0000010001000100		3	0100001000001000		3	0100001000001000		3
215	0000010010001000		3	0100000000100000		2	0000010010001000		3	0100000000100000		2
216	0000100000010000		3	0000100000010000		3	1001001000010000		3	1001001000010000		3
217	0000100010000100		3	0000100010000100		3	1001000100000100		3	1001000100000100		3
218	0000100100001000		3	0100000100000100		3	0000100100001000		3	0100000100000100		3
219	0001000000100000		3	0001000000100000		3	0100000100001001		1	0100000100001001		1
220	0001000100000100		3	0001000100000100		3	1001001000010000		2	1001001000010000		2
221	0001000100100100		3	0001000100100100		3	1001000100001000		2	1001000100001000		2
222	0001001000001000		3	0100000100100100		3	0001001000001000		3	0100000100100100		3
223	0001001001000100		3	0001001001000100		3	1001001000001000		3	1001001000001000		3
224	0010001000000100		3	0010001000000100		3	1000100000010000		3	1000100000010000		3
225	0010001000100100		3	0010001000100100		3	1001001001000010		1	1001001001000010		1
226	0010001001001000		3	0100001001000100		3	0010001001001000		3	0100001001000100		3
227	0010010000001000		3	0100100100000100		3	0010010000001000		3	0100100100000100		3
228	0010010001000100		3	0010010001000100		3	1001000100001000		3	1001000100001000		3
229	0010010010001000		3	0100000000100000		3	0010010010001000		3	0100000000100000		3
230	0010000001000000		4	0010000001000000		4	1001001000100001		1	1001001000100001		1
231	0000001001001001		1	0100100100100010		1	1001000100100010		1	0100100100100010		1
232	0000001000100010		1	0100100010000100		2	1001000100010001		1	0100100010000100		2
233	0000001000010001		1	0100100000010000		2	1001000010010010		1	0100100000010000		2
234	0000000100010010		1	0100000001000000		4	1001000010001001		1	0100000001000000		4
235	0000000100001001		1	0100100100010001		1	1001000001000010		1	0100100100010001		1
236	0000000010000010		1	0100100010010010		1	1001000000100001		1	0100100010010010		1
237	0000000001000001		1	0100100001000010		1	1000100100100001		1	0100100001000010		1
238	0010010000010010		1	0010010000010010		1	1000100010010001		1	1000100010010001		1
239	0010001000000010		1	0010001000000010		1	1001000010000100		3	1001000010000100		3
240	0010010000001001		1	0100100010000100		3	0010010000001001		1	0100100010000100		3
241	0010000100000001		1	0010000100000001		1	1001000010000100		2	1001000010000100		2
242	0001001000010010		1	0001001000010010		1	1000000010000000		4	1000000010000000		4
243	0001000100000010		1	0001000100000010		1	1000100001001001		1	1000100001001001		1
244	0001001000001001		1	0100100000100001		1	0001001000001001		1	0100100000100001		1
245	0001000010000001		1	0001000010000001		1	1000100000100010		1	1000100000100010		1
246	0000100100010010		1	0000100100010010		1	1000100000010001		1	1000100000010001		1
247	0000100010000010		1	0000100010000010		1	1000010000010010		1	1000010000010010		1
248	0000100100001001		1	0100010010010001		1	0000100100001001		1	0100010010010001		1
249	0000100001000001		1	0000100001000001		1	1000010000001001		1	1000010000001001		1
250	0000010010010010		1	0000010010010010		1	1000001000000010		1	1000001000000010		1
251	0000010001000010		1	0000010001000010		1	1000000100000001		1	1000000100000001		1
252	0000010010001001		1	0100010000100010		1	0000010010001001		1	0100010000100010		1
253	0000010000100001		1	0000010000100001		1	0100100010001001		1	0100100010001001		1
254	0000001001000100		2	0100010000010001		1	1001000000010000		2	0100010000010001		1
255	0000001000001000		2	0100001000010010		1	1000100100010000		2	0100001000010010		1

Table H.2 - Substitution Conversion Table

8-bit byte	State 1			State 2			State 3			State 4		
	Code Word		Next State	Code Word		Next State	Code Word		Next State	Code Word		Next State
	msb	lsb		msb	lsb		msb	lsb		msb	lsb	
0	0000010010000000		4	0000010010000000		4	0100100001001000		2	0100100001001000		2
1	0000100100000000		4	0000100100000000		4	0100100001001000		3	0100100001001000		3
2	0001001000000000		4	0001001000000000		4	0100100000001001		1	0100100000001001		1
3	0000000100100000		4	0100010000000001		1	1000001000000000		4	0100010000000001		1
4	0000000100100000		3	0100100000000010		1	1001000000000100		3	0100100000000010		1
5	0000000010010000		3	0100001000000000		4	1001000000100100		3	0100001000000000		4
6	0000000001001000		3	0100100000000100		2	1001000001001000		3	0100100000000100		2
7	0000000001001000		2	0100000100000000		4	1001000000000100		2	0100000100000000		4
8	0000000001001000		2	0100100010010000		3	1001000000100100		2	0100100010010000		3
9	0000000010010000		2	0100100000100100		2	1001000001001000		2	0100100000100100		2
10	0000010001000000		4	0000010001000000		4	1001001001000000		4	1001001001000000		4
11	0000100010000000		4	0000100010000000		4	1000100001001000		3	1000100001001000		3
12	0001000100000000		4	0001000100000000		4	0100010001001000		3	0100010001001000		3
13	0010001000000000		4	0010001000000000		4	1000100000000100		3	1000100000000100		3
14	0000000100010000		3	0100100000000100		3	1001000010010000		3	0100100000000100		3
15	0000000010001000		3	0100100010010000		2	1001000100100000		3	0100100010010000		2
16	0000000001000100		3	0100000100000001		1	0100100000001000		3	0100000100000001		1
17	0000000001000100		3	0100010000000010		1	0100100010001000		3	0100010000000010		1
18	0000000001000100		2	0100100000100100		3	1001000010010000		2	0100100000100100		3
19	0000000001000100		2	0100100100100000		3	1001000010010000		2	0100100100100000		3
20	0000000001000100		2	0100100100100000		2	0100010001001000		2	0100100100100000		2
21	0000000100010000		2	0100100000010010		1	0100100000001000		2	0100100000010010		1
22	0000010010000001		1	0000010010000001		1	1000100000100100		3	1000100000100100		3
23	0000100100000001		1	0000100100000001		1	1000100010010000		3	1000100010010000		3
24	0001001000000001		1	0001001000000001		1	0100100010001000		2	0100100010001000		2
25	0010010000000001		1	0010010000000001		1	1000100000000100		2	1000100000000100		2
26	0000000001001001		1	0100010000000010		3	1000010000000001		1	0100010000000010		3
27	0000000001001001		1	0100000100000001		1	1000100000000010		1	0100000100000001		1
28	0000000010010001		1	0100010000000010		2	1001000000001001		1	0100010000000010		2
29	0000000100100001		1	0100001000000010		1	1001000000010010		1	0100001000000010		1
30	0000100001000000		4	0000100001000000		4	1000100000100100		2	1000100000100100		2
31	0001000010000000		4	0001000010000000		4	1000100001001000		2	1000100001001000		2
32	0010000100000000		4	0010000100000000		4	0100010000001001		1	0100010000001001		1
33	0000010000100000		3	0000010000100000		3	0100100001001001		1	0100100001001001		1
34	0000000100001000		3	0100010000010010		1	1000100100100000		3	0100010000010010		1
35	0000000010000100		3	0100100000010001		1	1001000000001000		3	0100100000010001		1
36	0000000001000010		3	0100000010000000		4	1001000001000100		3	0100000010000000		4
37	0000010000100000		2	0000010000100000		2	1000001000000001		1	1000001000000001		1
38	0000000001000010		2	0100010000100100		3	1000100010010000		2	0100010000100100		3
39	0000000001000010		2	0100010000100100		2	1000100010010000		2	0100010000100100		2
40	0000000100001000		2	0100100000100010		1	1001000000001000		2	0100100000100010		1
41	0000010001000001		1	0000010001000001		1	1000010000000010		1	1000010000000010		1
42	0000010010000010		1	0000010010000010		1	1000000100000000		4	1000000100000000		4
43	0000100010000001		1	0000100010000001		1	1001000001000100		2	1001000001000100		2
44	0000100100000010		1	0000100100000010		1	1000100000001001		1	1000100000001001		1
45	0001000100000001		1	0001000100000001		1	1001000010001000		3	1001000010001000		3
46	0001001000000010		1	0001001000000010		1	1001000100010000		3	1001000100010000		3
47	0010001000000001		1	0010001000000001		1	1000100000001001		1	1000100000001001		1
48	0010010000000010		1	0010010000000010		1	0100010000001000		3	0100010000001000		3
49	0000000001000010		1	0100100010010001		1	1001000000010001		1	0100100010010001		1
50	00000000010001001		1	0100100001000100		3	1001000000100010		1	0100100001000100		3
51	00000000010010010		1	0100010010010000		3	1001000001001001		1	0100010010010000		3
52	00000000010001001		1	0100010010010000		2	1001000001001001		1	0100010010010000		2

8-bit byte	State 1		State 2		State 3		State 4	
	msb	lsb Next State	msb	lsb Next State	msb	lsb Next State	msb	lsb Next State
53	0000000100100010	1	0100100001000100	2	1001000100100001	1	0100100001000100	2
54	0000001000100001	1	0100100100100001	1	1001001001000001	1	0100100100100001	1
55	0000001001000010	1	0100100100010000	3	0100001000001001	1	0100100100010000	3
56	0001000001000000	4	0001000001000000	4	1001001000100000	3	1001001000100000	3
57	0010000010000000	4	0010000010000000	4	1001000010001000	2	1001000010001000	2
58	0010010010010000	3	0010010010010000	3	1001000100010000	2	1001000100010000	2
59	0010010001001000	3	0100100100010000	2	0010010001001000	3	0100100100010000	2
60	0010010000100100	3	0010010000100100	3	1001001000100000	2	1001001000100000	2
61	0010010000000100	3	0010010000000100	3	0100001001001000	2	0100001001001000	2
62	0001001001001000	3	0100000010000001	1	0001001001001000	3	0100000010000001	1
63	0001001000100100	3	0001001000100100	3	0100001001001000	3	0100001001001000	3
64	0001001000000100	3	0001001000000100	3	0100010010001000	3	0100010010001000	3
65	0000100100100100	3	0000100100100100	3	0100100100001000	3	0100100100001000	3
66	0000100100000100	3	0000100100000100	3	1000010000000100	3	1000010000000100	3
67	0000100000100000	3	0000100000100000	3	1000010000100100	3	1000010000100100	3
68	0000010010000100	3	0000010010000100	3	1000010001001000	3	1000010001001000	3
69	0000010000010000	3	0000010000010000	3	1000010010010000	3	1000010010010000	3
70	0000001001000100	3	0100001000000100	2	1000100000001000	3	0100001000000100	2
71	0000001000001000	3	0100100000010000	3	1000100010001000	3	0100100000010000	3
72	0000000100100100	3	0100010001000100	3	1000100100010000	3	0100010001000100	3
73	0000000100000100	3	0100001000100100	3	1001000000010000	3	0100001000100100	3
74	0000010000010000	2	0000010000010000	2	1000100001000100	3	1000100001000100	3
75	0001001001001000	2	0100001000000100	3	0001001001001000	2	0100001000000100	3
76	0000010010000100	2	0000010010000100	2	0100010000001000	2	0100010000001000	2
77	0000100000100000	2	0000100000100000	2	0100010010001000	2	0100010010001000	2
78	0010010001001000	2	0100000100000010	1	0010010001001000	2	0100000100000010	1
79	0000100100000100	2	0000100100000100	2	0100100100001000	2	0100100100001000	2
80	0000100100100100	2	0000100100100100	2	1000010000000100	2	1000010000000100	2
81	0001001000000100	2	0001001000000100	2	1000010000100100	2	1000010000100100	2
82	0001001000100100	2	0001001000100100	2	1000010001001000	2	1000010001001000	2
83	0010010000000100	2	0010010000000100	2	1000010010010000	2	1000010010010000	2
84	0010010000100100	2	0010010000100100	2	1000100000001000	2	1000100000001000	2
85	0010010010010000	2	0010010010010000	2	0100010001001001	1	0100010001001001	1
86	0000000100000100	2	0100001000100100	2	1000100001000100	2	0100001000100100	2
87	0000000100100100	2	0100010001000100	2	1000100010001000	2	0100010001000100	2

Annex I Optimum Power Control and Recording Conditions

(normative)

I.1 Optimum writing power

The optimum recording power P_{wo} that should be used for recording a disc is dependent on the disc, the recorder and the recording speed.

For the disc there are three main parameters involved:

- The sensitivity of the recording layers to laser power at a given wavelength.
- The change in sensitivity when the laser wavelength is changed.
- The “pit-formation mechanism” in the recording layer, which is dependent on the applied layer technology.

For the recorder the three main parameters involved are:

- The dimensions and optical quality of the laser light spot at the recording layer.
- The applied write strategy.
- The actual wavelength of the laser when recording the disc (see Annex K).

This wavelength depends on e.g.:

- the type of laser,
- the spread in wavelength for each individual laser of this type (and so for each individual recorder),
- the actual write power,
- the temperature of the laser.

As the optimum writing power P_{wo} depends on the disc, the recorder and the recording speed that are actually used, this power should be determined for each recorder/disc combination at the actual recording speed. Such a determination of the actual optimum writing power P_{wo} is called an **Optimum Power Control** procedure (OPC procedure).

I.1.1 Asymmetry and optimum writing power

For different writing powers, the asymmetry of the recorded 8-to-16 modulated data is different.

By test recording random 8-to-16 modulated data with different writing powers, and measuring the resulting asymmetry in the HF signal, the optimum writing power for the specific combination of disc and recorder at a specific recording speed can be obtained.

Figure I.1 shows schematically the procedure with the OPC and write strategy. The main signals that are influenced by the applied write strategy and power level are the modulation, the asymmetry and the jitter. In practice the asymmetry appears to be a sensitive parameter for OPC. An alternative measure for the asymmetry is β , which parameter is easier to handle.

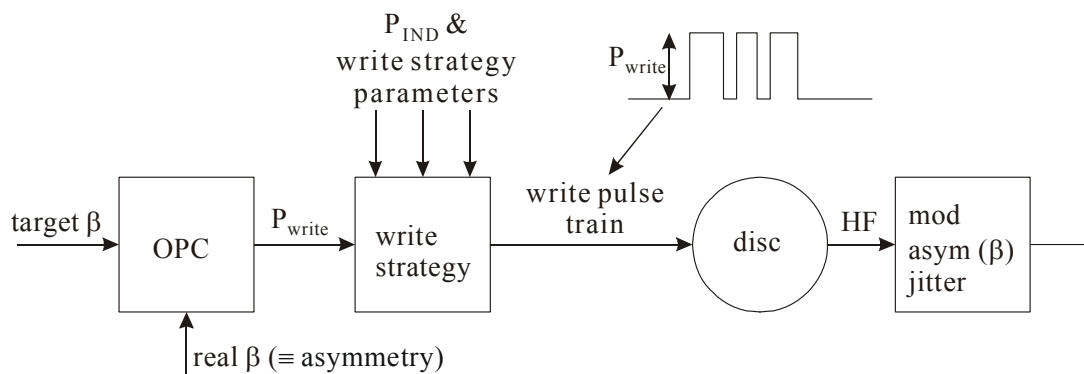


Figure I.1 - Schematic diagram of OPC procedure

I.1.2 Measurement of asymmetry by means of β

Using the definition of asymmetry directly, may result in complicated recorder electronics. Therefore a different parameter is used as a representation of asymmetry. This parameter β is based on using the AC coupled HF signal before equalization.

By definition: $\beta = (A_1 + A_2)/(A_1 - A_2)$ as the difference between the peak levels A_1 and A_2 ($A_1 + A_2$), normalized to the peak-peak value ($A_1 - A_2$) of the HF signal. See figure I.2.

β defined in this way, will be approximately equal to the asymmetry.

Zero asymmetry of the measured HF signal will, in general, correspond to $\beta \approx 0$.

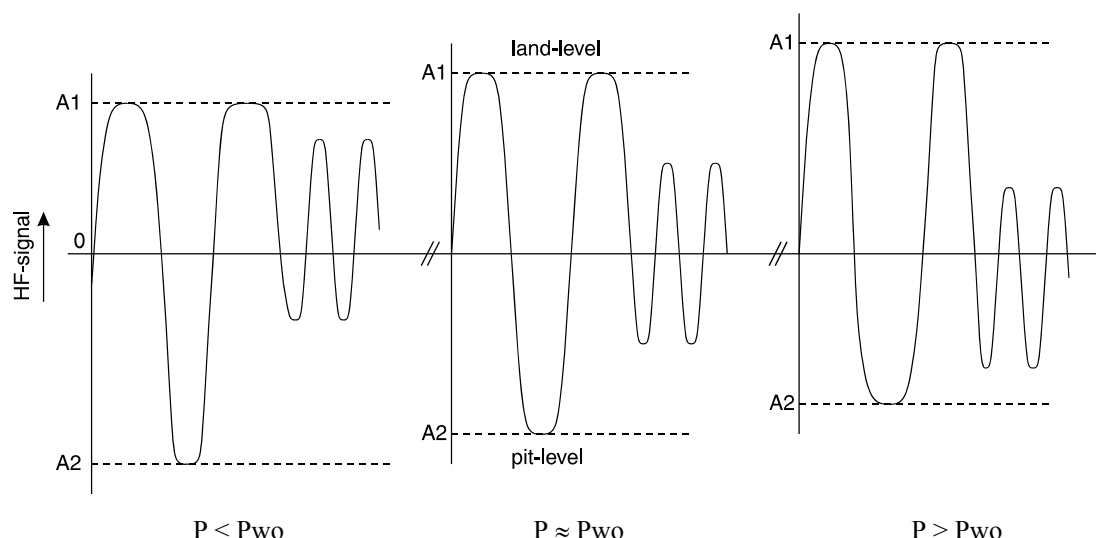


Figure I.2 - AC-coupled HF signals recorded with different writing powers

I.2 The OPC procedure

To facilitate the OPC procedure, an indicative value (an estimation) for the writing power is given at several writing speeds (see 14.4.2).

These values can not be used as the exact optimum writing power for the actual disc/recorder/speed combination, but can be used as a starting value for an OPC procedure.

As the setpoint in the OPC procedure, the target β value indicated in 14.4.2 is used.

The OPC procedure must be performed in an area on the disc that is specially reserved for this purpose: the Inner or Outer Disc Test Zone (see Table 8)

I.3 Write strategy parameters at other speeds

It is recommended that DVD+R recorders compliant with this document use the indicated test speeds as follows:

- the Primary recording velocity indicates the lowest speed at which the disc has been verified for a specific write strategy,
- the Upper recording velocity indicates the highest speed at which the disc has been verified for a specific write strategy,

an estimate for the write parameters at any other speed (within the speed range and parameter set defined for the specific write strategy) can be determined by linear interpolation between the parameters at the Primary recording velocity and the Upper recording velocity as indicated in 14.4.2.

Note: Disc Manufacturers should design media with a reasonable “linear” behaviour of the write strategy parameters over the speed ranges indicated in 14.4.2.

I.4 Media margins at non-optimum write power

To create some margins for practical accuracy requirements for drive implementations, the disc should allow for some deviations of the write power from the optimum values. Therefore the following specifications should be fulfilled (strongly recommended):

For actual write powers P_w in the range $0,90 \times P_{wo}$ to $1,05 \times P_{wo}$, and $P_b = P_{bo}$, the disc is recordable within all specifications.

This page is intentionally left blank

Annex J Running OPC

(informative)

The correct writing power for the DVD+R disc is to be determined by means of an Optimum Power Calibration procedure as described in Annex I of this document. However, after this calibration, the optimum power may change because of:

- power sensitivity fluctuation over the disc,
- wavelength shift of the laser diode due to change in operating temperature,
- change of spot aberrations due to change in disc skew, substrate thickness, defocus, etc.,
- changed conditions of disc and/or optics, when OPC was carried out a long time before actual recording.

The purpose of a Running OPC is to actively monitor the mark formation process and continuously adjust the writing power to the optimum power that is required. During the OPC procedure, also a “Running OPC signal” may be obtained that can be associated with optimally written marks (for example using the instantaneously reflected light signal). Such a “Running OPC signal” can be used to maintain subsequent recordings at the same optimal level as that determined by the OPC procedure.

This page is intentionally left blank

Annex K Wavelength dependency

(informative)

When organic dyes are used as a recording layer, the DVD+R disc characteristics are fundamentally wavelength dependent ($\Delta P_{wo}/P_{wo}$ is typical 1 to 3,5% per $\Delta\lambda = 1$ nm). On the other hand, the Laser Diode that generates the light used for recording and read-out of the DVD+R disc has a wavelength with a certain tolerance. Moreover, the wavelength of the light emitted by the Laser Diode will depend on the temperature of the device.

This attachment intends to describe the tolerances in temperature and wavelength that are needed by the recorder. Furthermore the disc parameter $(dP/d\lambda)/(P/\lambda)$ is introduced which can speed up the recorder in determining the optimum write power under the recorder's specific conditions. This parameter shall be indicated in the Physical format information in ADIP (see 14.4.2)

K.1 Wavelength/Temperature behaviour of recorders

Figure K.1 shows a typical Wavelength/Temperature diagram which can be considered as operating conditions for the disc. The disc should comply with all specifications for the unrecorded and recorded disc within the operating conditions as defined by the shaded area in Figure K.1.

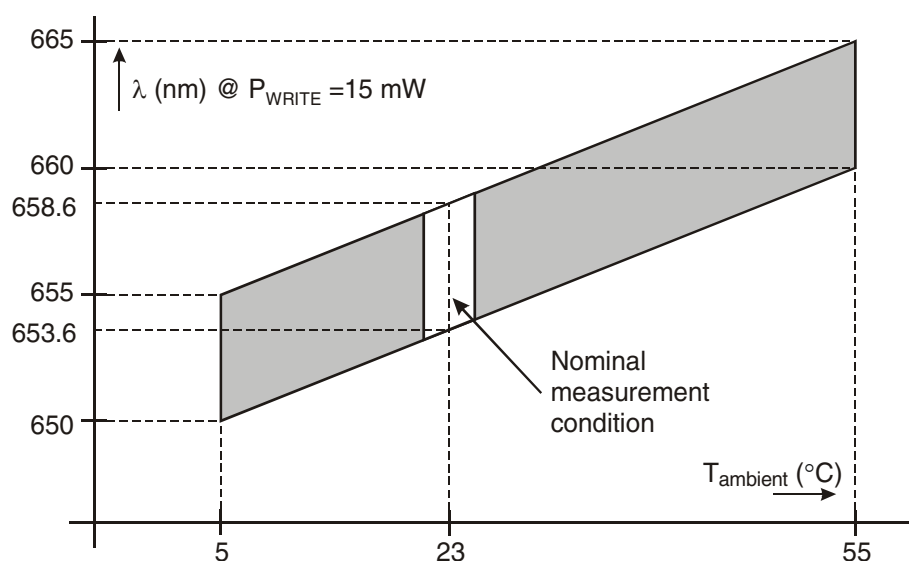


Figure K.1 - Wavelength/Temperature diagram indicating the disc operating conditions

Note:

The temperature of the Laser Diode itself may be higher than the ambient temperature of the disc due to dissipation in the laser. In the graph of figure K.1, a constant temperature difference is assumed between the disc and the laser.

K.2 Write power / Wavelength dependency of the disc

In practice it is not easy to determine the write power dependency of the disc on the laser wavelength directly. What can be measured by using usual optical equipment is the absorption of the recording layer as a function of the wavelength. When assuming that the write power is inversely proportional to the absorption of the recording layer, the dependency of this absorption on the wavelength can be translated into a dependency of the write power on the wavelength.

K.2.1 Measurement of the absorption of the recording layer of the disc

The absorption of the recording (dye) layer of the disc is determined by measuring the reflection and transmission versus the wavelength. For this purpose a parallel beam is used at a small angle to the normal on the disc surface. The wavelength is controlled by means of a monochromator.

The measurements are performed on a mirror area at the inner side of the disc in order to prevent wavelength dependent diffraction of the light caused by grooved areas.

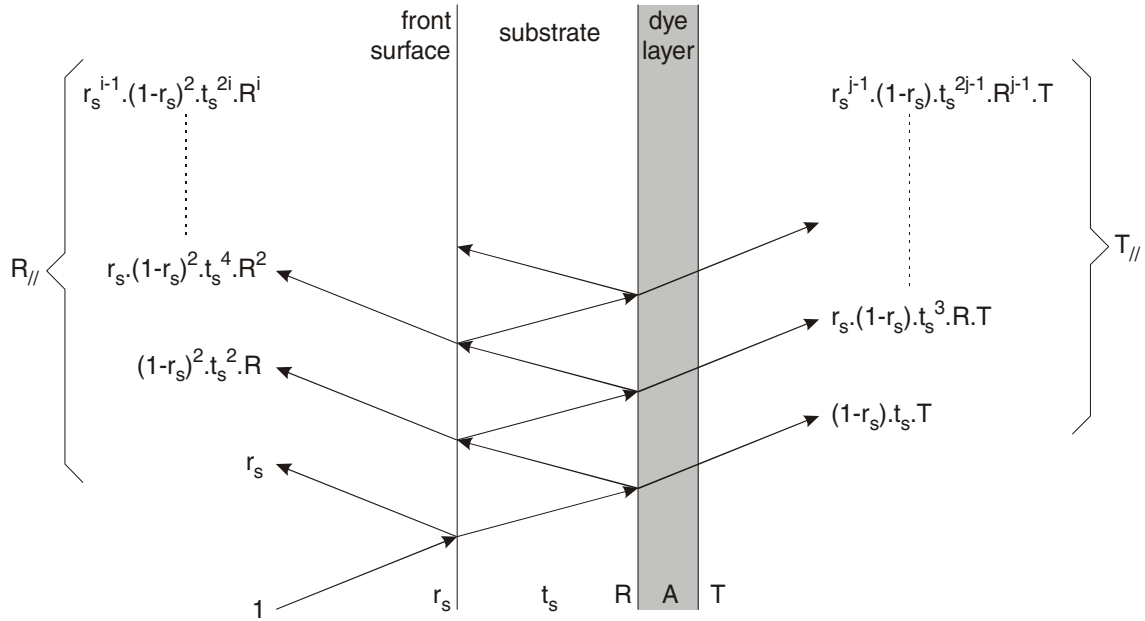


Figure K.2 – Definitions of reflectivity, transmission and absorption

In Figure K.2 the following applies:

(for the transparency of the formulas, the intensity of the incident beam is assumed to be normalized to 1)

r_s = reflectance of the entrance surface

t_s = transmittance of the substrate

R = reflectance of the recording layer

A = absorption of the recording layer

T = transmittance of the recording layer

$R_{//}$ = total measured reflected light

$T_{//}$ = total measured transmitted light

From $R_{//} = r_s + \frac{(1-r_s)^2 \cdot R \cdot t_s^2}{(1-r_s \cdot t_s^2 \cdot R)}$ the reflectance of the dye can be calculated: $R = \frac{R_{//} - r_s}{(1 + r_s \cdot R_{//} - 2 \cdot r_s) \cdot t_s^2}$

and from $T_{//} = \frac{(1-r_s) \cdot t_s \cdot T}{1 - r_s \cdot t_s^2 \cdot R}$ it follows that $T = T_{//} \cdot \frac{1 - r_s \cdot t_s^2 \cdot R}{(1-r_s) \cdot t_s}$

Because $A+T+R=1$, the absorption of the dye layer is given by: $A=1-R-T$

K.2.2 Determination of parameters for the Physical format information in ADIP

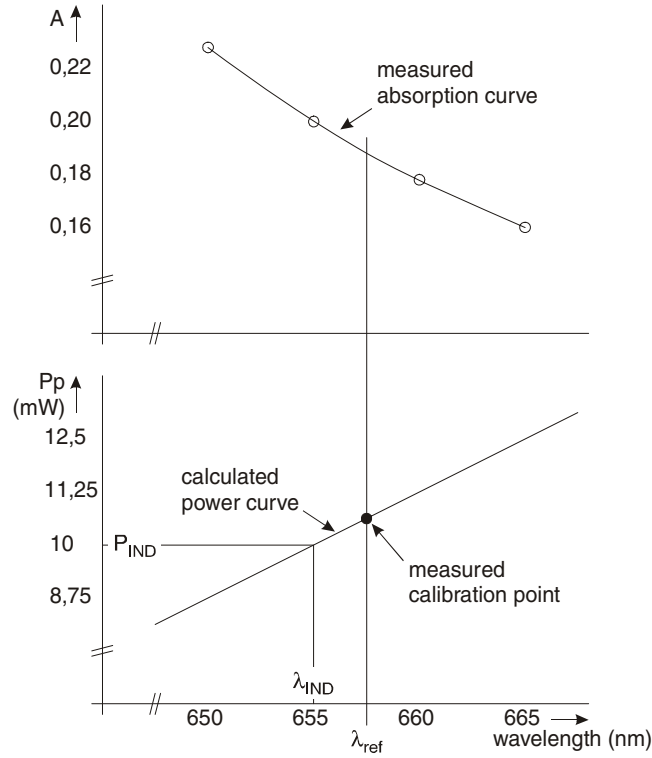


Figure K.3 – Example of absorption and power versus wavelength

The absorbed power $P_x = P_w(\lambda) \times A(\lambda)$ is creating the marks in the recording layer. It is assumed that this power P_x is more or less independent on the wavelength. In this case, $P_w(\lambda)$, a function of the wavelength λ , can be determined from $A(\lambda)$ with the help of the following formula:

$$P_w(\lambda) = \frac{P_w(\lambda_{ref}) \times A(\lambda_{ref})}{A(\lambda)}, \text{ in which } P_w(\lambda_{ref}) \text{ is the measured write power at } \lambda_{ref}.$$

The parameter $n = (dP_w/d\lambda)/(P_{IND}/\lambda_{IND})$ to be recorded in the Physical format information in ADIP can be determined from the power curve. $dP_w/d\lambda$ shall be averaged over the wavelength range from 645 nm to 670 nm. λ_{IND} has been chosen to be 655 nm and P_{IND} shall be $P_w(\lambda_{IND})$ as determined from the calculated power curve. The parameter $(dP_w/d\lambda)/(P_{IND}/\lambda_{IND})$ is in principal speed independent.

K.2.3 Determination of start power for the OPC procedure in a specific recorder

The corrected power indication P_{cor} at the actual wavelength of the recorder λ_{actual} can be approximated by:

$$P_{cor}(\lambda_{actual}) = P_{IND} + \frac{dP_w}{d\lambda} \times (\lambda_{actual} - \lambda_{IND}), \text{ in which as well } P_{IND} \text{ as } dP_w/d\lambda \text{ are speed dependent.}$$

The value of $dP_w/d\lambda$ at a speed $v1$ can be calculated from the values specified in ADIP:

$$\left(\frac{dP_w}{d\lambda} \right)_{atv1} = \frac{n}{\lambda_{IND}} \times P_{INDatv1}$$

The optimum start value of the power for the OPC procedure at a speed $v1$ can now be determined by the following formula:

$$P_{start \text{ at } v1}(\lambda_{actual}) = P_{IND \text{ at } v1} + \frac{n \times P_{IND \text{ at } v1}}{\lambda_{IND}} \times (\lambda_{actual} - \lambda_{IND})$$

This page is intentionally left blank

Annex L Explanation about the usage of the reference servos

(informative)

In the DVD+R/+RW system descriptions the function of the reference servo is meant as a measuring system to determine some of the (dynamical) mechanical characteristics of the disc, which are important for the design of practical servo systems in commercial drives.

Such practical implementations shall enable the drive to follow the mechanical deviations of the disc within rather small limits, to ensure the quality of the recordings made on the disc and of the read-out signals from such recordings. In general the tracking errors in the axial direction shall be smaller than 0,20 µm and the tracking errors in the radial direction shall be smaller than 0,045 µm.

L.1 Approximation of servo behavior

The tracking properties of a typical second order servo can be expressed by the following formula:

$$E(f) \approx c \times \left(\frac{f}{f_0} \right)^2 \times X(f) \quad (\text{for } f \ll f_0), \text{ where} \quad (1)$$

$E(f)$ is the tracking error for frequency f ,

$X(f)$ represents the amplitude of the related deviations,

f is the frequency of the deviations,

f_0 is the frequency where the open-loop transfer function of the servo crosses the 0 dB axis,

c is a constant, which typically = 3.

Assuming displacements that can be represented by sinusoidal components

$$x(t) = X(f) \times \cos(2\pi \times f \times t) \quad (2)$$

it can be seen that the amplitude of the accelerations related to such displacements increase quadratically with the frequency of the displacements:

$$\alpha(f) = (2\pi \times f)^2 \times X(f) \quad (3)$$

In these relations the frequency f of the deviations is proportional to the speed of the recording layer of the disc relative to the optical pick-up head of the drive. As a result, the accelerations will increase quadratically with the actual running speed of the disc.

L.1.1 Limitations of servo systems

In general servo systems have two limitations:

- the stroke of the actuator is limited (X_{limit}), determining the maximum allowed $X(f)$,
- the acceleration of the actuator is limited (α_{limit}), determining the maximum allowed $\alpha(f)$.

At low frequencies $\alpha(f)$ will be small because of (3) and thus $X(f)$ will be the limiting factor.

In the main part of the frequency characteristic of a practical servo system, from about $f = \frac{1}{2\pi} \sqrt{\frac{\alpha_{\text{limit}}}{X_{\text{limit}}}}$ upto

about f_0 , $\alpha(f)$ will be the limiting factor. By using the above formulas (1) and (3), the following relation between the maximum acceleration and the maximum allowed tracking error e_{max} can be determined (for $f < f_0$):

$$\alpha_{\text{max}}(f) = \frac{(2\pi \times f_0)^2}{c} \times e_{\text{max}} \quad (4)$$

For frequencies above f_0 the servo system is not able to track any deviations, meaning that the deviations by themselves must be sufficiently small.

L.2 Considerations for practical measurements and practical servo implementations

From the above approximations we see that at higher rotational speeds the consequences of deviations $x(t)$ on the disc, such as tracking error and accelerations, increase quadratically with the speed (frequency), causing (too) severe requirements for practical servo implementations. For optimum system performance a good balance between disc specifications and drive capabilities is needed. At higher rotational speeds more severe requirements for the disc are needed to facilitate practical bandwidth values for the servos in the drive.

However when measuring at the normal 1x conditions, such smaller disc deviations would lead to very small and consequently noisy error signals. By increasing the measurement speed to 50 Hz CAV and keeping the reference servo the same, the errors $E(f)$ will be larger and can be determined more accurately.

Another advantage is that such a measurement condition is much closer to the realistic situation in a practical drive. At higher rotational speeds, the “dynamic” deviations are more important than the “static” deviations which might be reduced due to stretching effects of the disc (such stretching effects especially have a positive influence on the axial deviations).

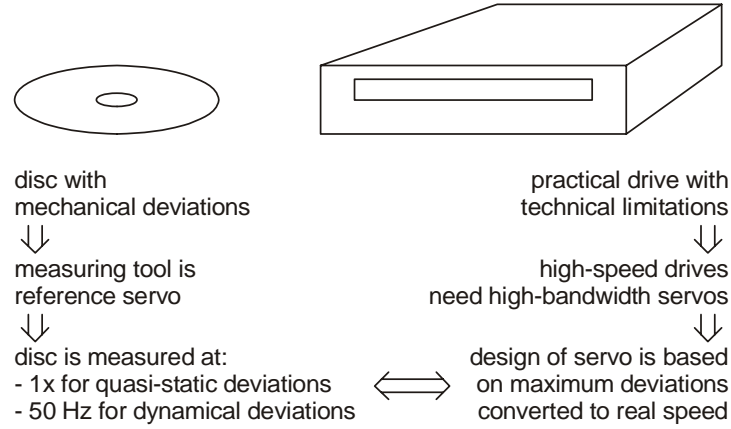


Figure L.1 – Illustration of disc measurement and drive design

L.2.1 Translation of characteristics to other speeds

For designing practical servo systems, needed to handle the discs at their aimed recording speed, the results measured at 1x CLV and 50 Hz CAV have to be translated to the related actual rotational speed of the disc. In this respect the acceleration is about the most useful parameter and, as has been seen, this is quadratically dependent on the rotational speed of the disc. Although not accurate, because the stretching effects that will make a disc appear more flat at higher rotational speeds are not taken into account, the following relation for the amplitudes of the accelerations at some specific radius R gives a good first order approximation:

$$\frac{\alpha_{\text{at actual speed}}}{\alpha_{\text{at measurement speed}}} = \left(\frac{v_{\text{act}}}{v_{\text{meas}}} \right)^2 \quad (5)$$

in which v_{meas} = the Reference velocity (3,49 m/s) for the 1x CLV measurement condition,

or $v_{\text{meas}} = 2\pi \times 50 \times R$ for the 50 Hz CAV measurement condition,

and in which $v_{\text{act}} = n \times 3,49$ m/s in case of CLV applications (see also 9.5),

or $v_{\text{act}} = 2\pi \times f_{\text{rot}} \times R$ in case of CAV applications.

From the $\alpha_{\text{at actual speed}}$ the needed bandwidth now can be calculated:

$$f_0 = \frac{1}{2\pi} \sqrt{\frac{c \times \alpha_{\text{act}}}{e_{\text{max}}}}, \quad (6)$$

where e_{max} is the maximum acceptable tracking error for good recording properties.

L.3 Example calculations for axial tracking

The following tables show the requirement under the measurement condition and the accelerations as can be derived from this requirement for the measurement condition, for the 1x reference speed, and for the real application speed (with the help of the indicated formulas).

L.3.1 Basic requirements for all discs

All discs for all recording speeds have to fulfill the basic requirements measured at 1x Reference velocity (CLV). Because of the relatively low rotational speeds these measurements reflect the (quasi-)static deviations of the disc.

Axial run-out $\leq 0,3$ mm and **axial residual tracking error $\leq 0,13$ μm**

	speed		radius 24 mm	radius 58mm
measurement condition	1x CLV	requirement	$e_{\text{max}} \leq 0,13 \mu\text{m}$	$e_{\text{max}} \leq 0,13 \mu\text{m}$
		α_{max} (4)	8 m/s^2	8 m/s^2
application conditions	1x	α_{max} (5)	8 m/s^2	8 m/s^2
		f_0 needed for real $e_{\text{max}} \leq 0,20 \mu\text{m}$ (6)	1,7 kHz	1,7 kHz
	2,4x	α_{max} (5)	46 m/s^2	46 m/s^2
		f_0 needed for real $e_{\text{max}} \leq 0,20 \mu\text{m}$ (6)	4,2 kHz	4,2 kHz
	4x	α_{max} (5)	128 m/s^2	128 m/s^2
		f_0 needed for real $e_{\text{max}} \leq 0,20 \mu\text{m}$ (6)	7,0 kHz	7,0 kHz

L.3.2 Additional requirements for all discs able to be recorded at speeds above 4x

All discs suited for recording speeds $> 4x$ (not including those specified for recording speeds up to 4x) shall fulfill the following additional requirements measured at 50 Hz rotational speed (CAV). Up to 8x speed most of the disc is still recorded in CLV mode, which means that an increase in axial deviations towards the outer diameter can be allowed (rotational speed reduces towards outer diameter).

Axial residual tracking error $\leq 0,20 \mu\text{m}$ for radii ≤ 29 mm
and $\leq 0,20 \times (r / 29)^2 \mu\text{m}$ for radii ≥ 29 mm

	speed		radius 24 mm	radius 29 mm	radius 58 mm
measurement condition	50 Hz CAV	requirement	$e_{\text{max}} \leq 0,20 \mu\text{m}$	$e_{\text{max}} \leq 0,20 \mu\text{m}$	$e_{\text{max}} \leq 0,80 \mu\text{m}$
		α_{max} (4)	12 m/s^2	12 m/s^2	48 m/s^2
reference speed	1x	α_{max} (5)	$2,6 \text{ m/s}^2$	$1,8 \text{ m/s}^2$	$1,8 \text{ m/s}^2$
application conditions	6,6x	α_{max} (5)	113 m/s^2		
		f_0 needed for real $e_{\text{max}} \leq 0,20 \mu\text{m}$ (6)	6,5 kHz		
	8x	α_{max} (5)	---	113 m/s^2	113 m/s^2
		f_0 needed for real $e_{\text{max}} \leq 0,20 \mu\text{m}$ (6)	---	6,5 kHz	6,5 kHz

L.3.3 Additional requirements for all discs able to be recorded at speeds above 8x

Additional to the requirements in L.3.2, all discs suited for recording speeds $> 8x$ (not including those specified for recording speeds up to $8x$) shall furthermore fulfill the following additional requirements measured at 50 Hz rotational speed (CAV). Above $8x$ speed (like e.g. at $16x$) most or all of the disc is recorded in CAV mode, which means that the axial deviations at the inner diameter and the outer diameter have the same influence.

Axial residual tracking error $\leq 0,40 \mu\text{m}$

	speed		radius 24 mm	radius 58 mm
measurement condition	50 Hz CAV	requirement	$e_{\text{max}} \leq 0,40 \mu\text{m}$ (see Note below)	$e_{\text{max}} \leq 0,40 \mu\text{m}$
		α_{max} (4)	24 m/s^2	24 m/s^2
reference speed	1x	α_{max} (5)	$5,1 \text{ m/s}^2$	$0,88 \text{ m/s}^2$
application conditions	6,6x	α_{max} (5)	225 m/s^2	
		f_0 needed for real $e_{\text{max}} \leq 0,20 \mu\text{m}$ (6)	$9,2 \text{ kHz}$ see L.3.4	
	16x	α_{max} (5)	---	225 m/s^2
		f_0 needed for real $e_{\text{max}} \leq 0,20 \mu\text{m}$ (6)	---	$9,2 \text{ kHz}$ see L.3.4

Note: as a consequence of L.3.2 and L.3.3 discs suited for recording at speeds above $8x$ shall fulfil the combined requirement: $\leq 0,20 \mu\text{m}$ for radii $\leq 29 \text{ mm}$,
and $\leq 0,20 \times (r / 29)^2 \mu\text{m}$ for radii $\geq 29 \text{ mm}$ but $\leq 41 \text{ mm}$,
and $\leq 0,40 \mu\text{m}$ for radii $\geq 41 \text{ mm}$.

L.3.4 Stretching effect at highest rotational speed

When running at speeds of more than 3000 RPM the stretching of the disc has more effect than at the measurement speed of 3000 RPM (50 Hz). In general one can assume that the flatness of the disc improves, when going from 3000 RPM to higher rotational speeds. This improvement is not included in the above used formulas and therefore the tables show the theoretical worst case situations.

Due to such stretching effects in practical discs, the real α_{max} will be somewhat lower than the calculated worst case values, while locally also a slightly higher e_{max} can be allowed, resulting in lower requirements for f_0 . In the case of $16x$ ($\approx 10000 \text{ RPM}$) a **bandwidth f_0 of about 8 kHz** appears to be sufficient to handle discs that fulfil the requirements under the measurement conditions as shown above.

L.4 Example calculations for radial tracking

The following tables show the requirement under the measurement condition and the accelerations as can be derived from this requirement, for the measurement condition, for the 1x reference speed, and for the real application speed (with the help of the indicated formulas).

L.4.1 Basic requirements for all discs

All discs for all recording speeds have to fulfill the basic requirements measured at 1x Reference velocity (CLV). Because of the relatively low rotational speeds these measurements reflect the (quasi-)static deviations of the disc.

Radial run-out $\leq 35 \mu\text{m}$ and **radial residual tracking error $\leq 0,015 \mu\text{m}$**

	speed		radius 24 mm	radius 58mm
measurement condition	1x CLV	requirement	$e_{\text{max}} \leq 0,015 \mu\text{m}$	$e_{\text{max}} \leq 0,015 \mu\text{m}$
		α_{max} (4)	$1,1 \text{ m/s}^2$	$1,1 \text{ m/s}^2$
application conditions	1x	α_{max} (5)	$1,1 \text{ m/s}^2$	$1,1 \text{ m/s}^2$
		f_0 needed for real $e_{\text{max}} \leq 0,022^* \mu\text{m}$ (6)	2,0 kHz	2,0 kHz
	2,4x	α_{max} (5)	$6,5 \text{ m/s}^2$	$6,5 \text{ m/s}^2$
		f_0 needed for real $e_{\text{max}} \leq 0,045 \mu\text{m}$ (6)	3,3 kHz	3,3 kHz
	4x	α_{max} (5)	18 m/s^2	18 m/s^2
		f_0 needed for real $e_{\text{max}} \leq 0,045 \mu\text{m}$ (6)	5,5 kHz	5,5 kHz

* at 1x the original specification shall be kept

L.4.2 Additional requirements for all discs able to be recorded at speeds above 4x

All discs suited for recording speeds $> 4x$ (not including those specified for recording speeds up to 4x) shall fulfill the following additional requirements measured at 50 Hz rotational speed (CAV). Up to 8x speed most of the disc is still recorded in CLV mode, which means that an increase in radial deviations towards the outer diameter can be allowed (rotational speed reduces towards outer diameter).

Radial residual tracking error $\leq 0,025 \mu\text{m}$ for radii $\leq 29 \text{ mm}$
and $\leq 0,025 \times (r / 29)^2 \mu\text{m}$ for radii $\geq 29 \text{ mm}$

	speed		radius 24 mm	radius 29 mm	radius 58 mm
measurement condition	50 Hz CAV	requirement	$e_{\text{max}} \leq 0,025 \mu\text{m}$	$e_{\text{max}} \leq 0,025 \mu\text{m}$	$e_{\text{max}} \leq 0,100 \mu\text{m}$
		α_{max} (4)	$1,9 \text{ m/s}^2$	$1,9 \text{ m/s}^2$	$7,5 \text{ m/s}^2$
reference speed	1x	α_{max} (5)	$0,40 \text{ m/s}^2$	$0,27 \text{ m/s}^2$	$0,27 \text{ m/s}^2$
application conditions	6,6x	α_{max} (5)	$17,6 \text{ m/s}^2$		
		f_0 needed for real $e_{\text{max}} \leq 0,045 \mu\text{m}$ (6)	5,4 kHz		
	8x	α_{max} (5)	---	$17,6 \text{ m/s}^2$	$17,6 \text{ m/s}^2$
		f_0 needed for real $e_{\text{max}} \leq 0,045 \mu\text{m}$ (6)	---	5,4 kHz	5,4 kHz

L.4.3 Additional requirements for all discs able to be recorded at speeds above 8x

Additional to the requirements in L.4.2, all discs suited for recording speeds $> 8x$ (not including those specified for recording speeds up to $8x$) shall furthermore fulfill the following additional requirements measured at 50 Hz rotational speed (CAV). Above $8x$ speed (like e.g. at $16x$) most or all of the disc is recorded in CAV mode, which means that the radial deviations at the inner diameter and the outer diameter have the same influence.

Radial residual tracking error $\leq 0,055 \mu\text{m}$

	speed		radius 24 mm	radius 58 mm
measurement condition	50 Hz CAV	requirement	$e_{\text{max}} \leq 0,055 \mu\text{m}$ (see Note below)	$e_{\text{max}} \leq 0,055 \mu\text{m}$
		α_{max} (4)	$4,1 \text{ m/s}^2$	$4,1 \text{ m/s}^2$
reference speed	1x	α_{max} (5)	$0,88 \text{ m/s}^2$	$0,15 \text{ m/s}^2$
application conditions	6,6x	α_{max} (5)	$38,7 \text{ m/s}^2$	
		f_0 needed for real $e_{\text{max}} \leq 0,045 \mu\text{m}$ (6)	$8,1 \text{ kHz}$	
	16x	α_{max} (5)	---	$38,7 \text{ m/s}^2$
		f_0 needed for real $e_{\text{max}} \leq 0,045 \mu\text{m}$ (6)	---	$8,1 \text{ kHz}$

Note: as a consequence of L.4.2 and L.4.3 discs suited for recording at speeds above $8x$ shall fulfil the combined requirement:

$\leq 0,025 \mu\text{m}$ for radii $\leq 29 \text{ mm}$,
 and $\leq 0,025 \times (r / 29)^2 \mu\text{m}$ for radii $\geq 29 \text{ mm}$ but $\leq 43 \text{ mm}$,
 and $\leq 0,055 \mu\text{m}$ for radii $\geq 43 \text{ mm}$.

L.5 Recommendations for drives when to record/playback at lower speeds

The requirements for the disc as described above will not be easy to meet. Although disc manufacturers will be pushed to keep the specifications, some (small) part of their production might not completely fulfil all requirements. Especially at the outer side of the disc, the unflatness of the substrate/recording layer and the unroundness of the tracks might get worse.

If, because of possible tracking problems, drives are not able to record/playback at the maximum speed, the drive should spin-down to a lower speed such as e.g. $12x$ or $8x$. The maximum accelerations encountered by the drive will reduce quadratically with reducing speed, such that at $12x$ the maximum worst case accelerations that can be expected will be:

$$\left(\frac{12}{16}\right)^2 \times 225 = 127 \text{ m/s}^2 \text{ for the axial tracking system (not including any positive effects of the stretching), and}$$

$$\left(\frac{12}{16}\right)^2 \times 38,7 = 21,8 \text{ m/s}^2 \text{ for the radial tracking system.}$$

The parameters for setting the write strategy should be derived from the values defined for the Primary velocity and the Upper velocity as specified in 14.4.2.3.3 by linear interpolation (see also annex I.3).

Annex M Measurement of the groove wobble amplitude

(informative)

M.1 Relation between normalized wobble signal and wobble amplitude

The wobble amplitude in nm cannot easily be measured directly. However, it can be derived from the normalized wobble signal. The theoretical results for such a derivation are given below.

The peak value of the wobble signal I_W can be seen as:

$$I_{Wp} = A \times \sin(2 \times \pi \times a / p)$$

where:

a = wobble amplitude in nm

p = track pitch of the radial error signal

A = the peak value of the radial error signal

In figure M.1 the parameters a , p , A and I_{Wp} are shown. The groove has a peak displacement of ' a ' (wobble amplitude) from the averaged centre of the groove to the actual centre of the groove. The normalized wobble signal can now be defined as:

$$\frac{I_{Wpp}}{(I_1 - I_2)_{pp}} = \frac{2 \times I_{Wp}}{2 \times A} = \sin\left(2 \times \pi \times \frac{a}{p}\right)$$

where

$$(I_1 - I_2)_{pp} = 2 \times A$$

The wobble signal I_W is not only dependent on the wobble amplitude a , but also the track pitch p . Due to normalization, dependencies on groove geometry, spot shape and optical aberrations have been eliminated.

M.2 Tolerances of the normalized wobble signal

From the above formulae for the normalized wobble signal, the tolerances as given in 28.4 can be converted to nm for a given track pitch of ' p ' = 0,74 μm .

Lower limit: 0,15 corresponds to $a = 18$ nm.

Upper limit: 0,25 corresponds to $a = 30$ nm.

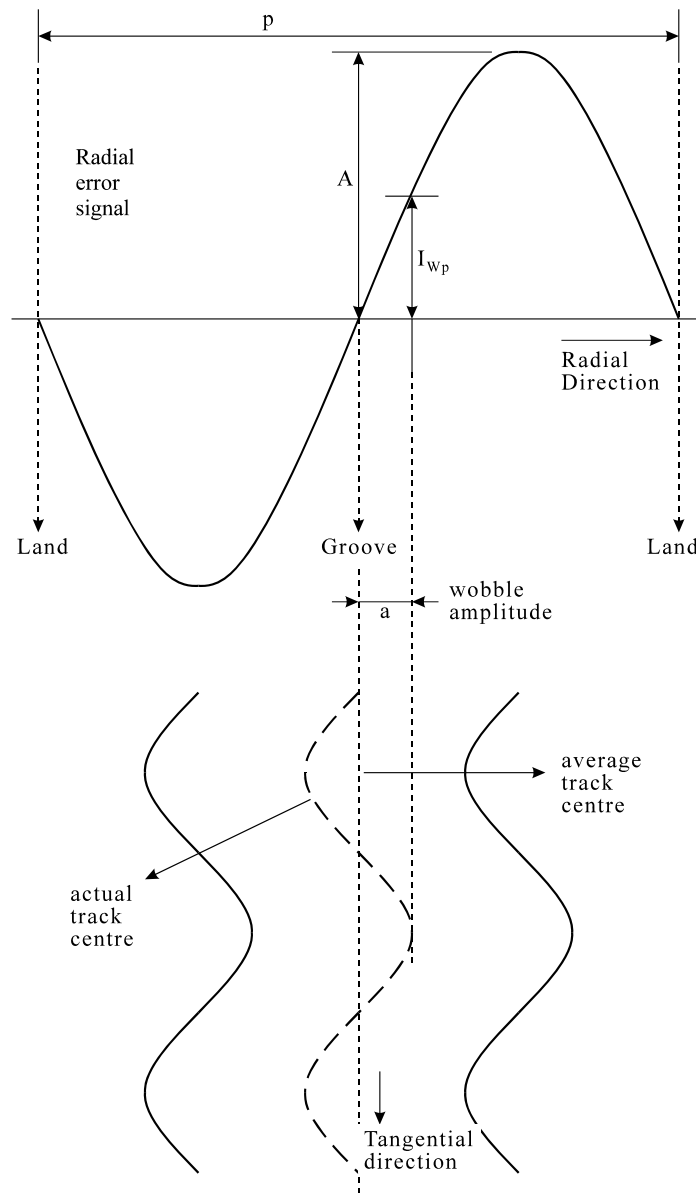


Figure M.1 - Wobble amplitude of the groove

Annex N Light fastness of the disc

(informative)

Related documents:

ISO 105-A02 Textiles - Tests for colour fastness - Part A02: Grey scale for assessing change in colour

ISO 105-B02 Textiles - Tests for colour fastness - Part B02: Colour fastness to artificial light: Xenon arc fading lamp test

Light fastness of the DVD+R disc should be tested with an air cooled xenon lamp and test apparatus under conditions complying with ISO 105-B02.

Test conditions:

- Black Panel Temperature : < 40 °C
- Effective humidity: : 70 - 80 %

Disc illumination:

- Through the substrate, normal incident.
- Disc not packed, out of cassette.
- The total exposure shall be such that the European Blue Wool Reference #5 shows a contrast between exposed and unexposed portions equal to grey scale grade 3 (see ISO 105-B02 and ISO 105-A02).

Requirements after illumination:

All disc specifications must still be fulfilled.

Remark:

The change in color of the DVD+R disc is irrelevant for this test.

This page is intentionally left blank

Annex O Transportation

(informative)

O.1 General

As transportation occurs under a wide range of temperature and humidity variations, for differing periods, by many methods of transport and in all parts of the world, it is not practical to specify mandatory conditions for transportation or for packaging.

O.2 Packaging

The form of packaging should be agreed between sender and recipient or, in absence of such an agreement, is the responsibility of the sender. It should take into account the following hazards.

O.2.1 Temperature and humidity

Insulation and wrapping should be designed to maintain the conditions for storage over the estimated period of transportation.

O.2.2 Impact loads and vibrations

- a) Avoid mechanical loads that would distort the shape of the disc.
- b) Avoid dropping the disc.
- c) Discs should be packed in a rigid box containing adequate shock-absorbent material.
- d) The final box should have a clean interior and a construction that provides sealing to prevent the ingress of dirt and moisture.

This page is intentionally left blank

Annex P How to use the Physical format information in ADIP

(informative)

To fully exploit the Physical format information in the ADIP, the following rules are given as a recommended guideline (see also the flowchart in Figure P.1).

Drives should read the ADIP and check for the following information:

- 1) check the Disc Category in byte 0
⇒ determine if the disc is a DVD+R or DVD+RW disc, also check if the disc is a single layer or a dual layer disc; use the related book (see clause 3) for further interpretations.

Drives shall respect the Disc Application Code:

- 2) check the Disc Application Code in byte 17
⇒ if the drive is not able to obey the rules related to a specific Disc Application Code, the drive shall block the disc for recording.

If the drive can do "media recognition" (i.e. the drive can uniquely determine the manufacturer and the type of the disc and has optimum sets of write parameters for certain discs in its memory):

- 3) check for Disc Manufacturer and Media Type ID (bytes 19 to 29)
⇒ choose the optimum write strategy for this specific media from the drive's memory.

If the drive fails to recognize the media:


- 4) check the version number in byte 0
⇒ if the version number is unknown: do not use the contents of bytes 32 to 63,
⇒ if the version number is known: interpret bytes 32 to 63 according to the correct book version.
- 5) check byte 18 for the presence of Extended Information blocks
⇒ if no EI blocks are present: only basic write strategy is available.

If EI blocks present:

- 6) check the Format number in each present EI block
⇒ if the Format number is unknown: do not use the contents of the related EI block,
⇒ if the Format number is known: interpret the EI block according to the correct book version.

Now the drive can choose the best fitting recording speed and write strategy from the available options:

- ⇒ basic write strategy (1x ~ 2,4x) as defined in bytes 32 to 63,
- ⇒ write strategy from one of the known EI blocks,
- ⇒ for each available write strategy the drive should check the actually supported recording speeds indicated in the related bytes (supported recording speeds can be adapted in future versions of this document).

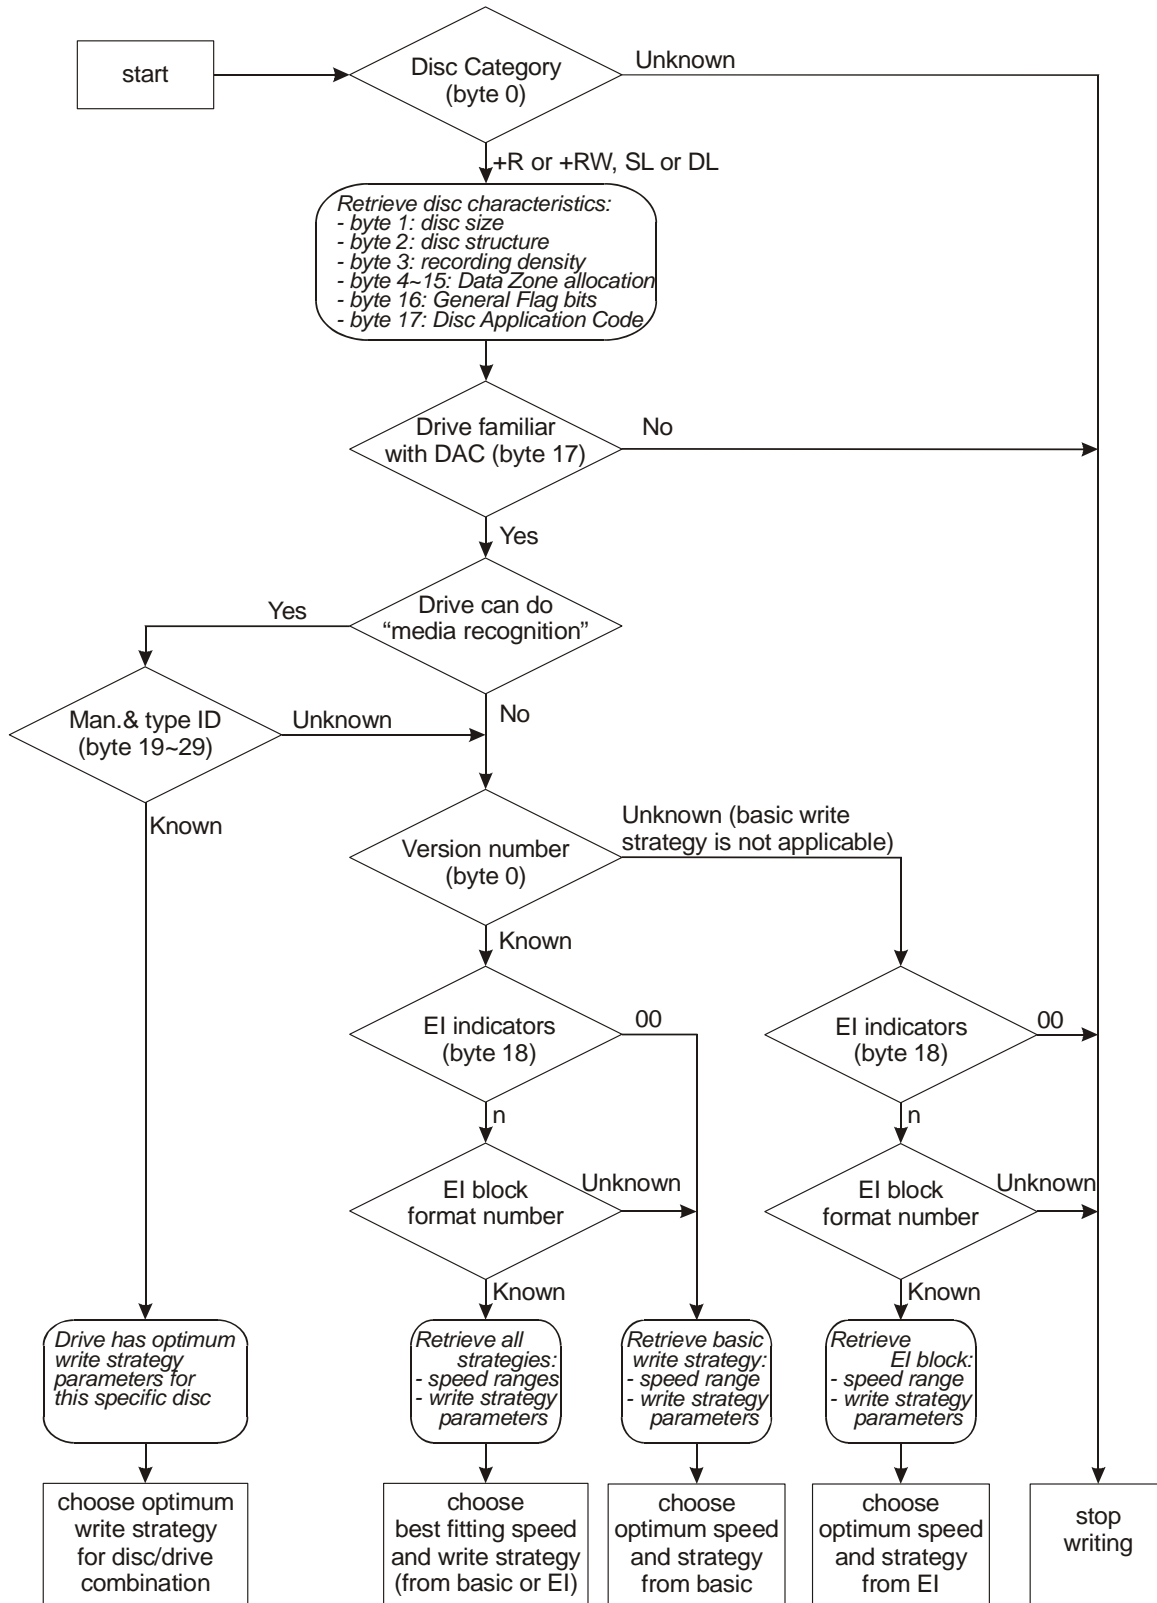

Note: in future more than one EI block can exist on one disc!

Figure P.1 - Flowchart showing the use of Physical format information in ADIP

Annex Q Values to be Implemented in Existing and Future Specifications

(informative)

The values for bytes which this System Description specifies are related to Recordable discs which are in conformance with this System Description, viz. DVD+R Format discs. It is expected that other categories of DVD discs will be standardized in future. It is therefore recommended that the following values be used for these other DVD discs. Further possible bit patterns are intended for future standardization.

All standards are subject to revisions, so the information in this annex can be subject to changes. Therefore it is recommended to check this information against the most recent edition of the indicated standards.

Identification Data

Bit b_{31}	shall be set to ZERO, indicating CLD format ONE, indicating Zoned format
Bit b_{30}	shall be set to ZERO, indicating pit tracking ONE, indicating groove tracking
Bit b_{29}	shall be set to ZERO if the reflectance is greater than 40 % with a PBS optical system ONE if the reflectance is less than 40 % with a PBS optical system
Bit b_{28}	Reserved, shall be set to ZERO
Bits b_{27} to b_{26}	shall be set to ZERO ZERO in the Data Zone ZERO ONE in the Lead-in Zone ONE ZERO in the Lead-out Zone ONE ONE in the Middle Zone
Bit b_{25}	shall be set to ZERO, indicating read-only data ONE, indicating other than read-only data
Bit b_{24}	shall be set to ZERO on Layer 0 of DL discs, ONE on Layer 1 of DL discs, ZERO on SL discs.
Bits b_{23} to b_0	shall specify the Physical Sector Number

Physical format information in the ADIP in the Lead-in Zone

Byte 0 - Disc Category and Version Number

Bits b₇ to b₄ shall specify the Disc Category

- if set to 0000, they indicate a DVD - Read-Only disc (DVD-RO)
- if set to 0001, they indicate a DVD Rewritable disc (DVD-RAM)
- if set to 0010, they indicate a DVD Recordable disc (DVD-R)
- if set to 0011, they indicate a DVD Re-recordable disc (DVD-RW)
- if set to 1001, they indicate a DVD+RW Single Layer disc
- if set to 1010, they indicate a DVD+R Single Layer disc
- if set to 1101, they indicate a DVD+RW Dual Layer disc
- if set to 1110, they indicate a DVD+R Dual Layer disc

Bits b₃ to b₀ shall specify the Version Number. Together with b₇ to b₄ they specify the related document.

- if b₇ to b₄ set to 0000 and b₃ to b₀ set to 0001, they specify ECMA Standard 267/268 (DVD-RO)
- if b₇ to b₄ set to 0001 and b₃ to b₀ set to 0001, they specify ECMA Standard 272 (DVD-RAM 2,6 GB)
- if b₇ to b₄ set to 0001 and b₃ to b₀ set to 0110, they specify ECMA Standard 330 (DVD-RAM)
- if b₇ to b₄ set to 0010 and b₃ to b₀ set to 0001, they specify ECMA Standard 279 (DVD-R 3,95 GB)
- if b₇ to b₄ set to 0010 and b₃ to b₀ set to 0101, they specify ECMA Standard 359 (DVD-R)
- if b₇ to b₄ set to 0011 and b₃ to b₀ set to 0010, they specify ECMA Standard 338 (DVD-RW)
- if b₇ to b₄ set to 1001 and b₃ to b₀ set to 0001, they specify ECMA Standard 274 (+RW 3,0 GB)
- if b₇ to b₄ set to 1001 and b₃ to b₀ set to 0010,
they specify the DVD+RW System Specification, part 1, volume 1 (SL, 2,4x & 4x) (ECMA 337)
- if b₇ to b₄ set to 1001 and b₃ to b₀ set to 0011,
they specify the DVD+RW System Specification, part 1, volume 2 (SL, 8x) (ECMA 371)
- if b₇ to b₄ set to 1010 and b₃ to b₀ set to 0001,
they specify this document (DVD+R System Specification, part 1, volume 1 (SL, 1x to 16x)) (ECMA 349)
- if b₇ to b₄ set to 1101 and b₃ to b₀ set to 0001,
they specify the DVD+RW System Specification, part 2, volume 1 (DL, 2,4x) (ECMA 374)
- if b₇ to b₄ set to 1110 and b₃ to b₀ set to 0001,
they specify the DVD+R System Specification, part 2, volume 1 (DL, 2,4x & 3,3~8x & 6,6~16x) (ECMA 364)

Byte 1 - Disc size and maximum transfer rate

Bits b₇ to b₄ shall specify the disc size

- if set to 0000, they specify a 120 mm disc
- if set to 0001, they specify an 80 mm disc

Bits b₃ to b₀ shall specify the maximum transfer rate

- if set to 0000, they specify a maximum transfer rate of 2,52 Mbits/s
- if set to 0001, they specify a maximum transfer rate of 5,04 Mbits/s
- if set to 0010, they specify a maximum transfer rate of 10,08 Mbits/s
- if set to 1111, they specify no maximum transfer rate is specified.

Byte 2 - Disc structure

Bit b₇ shall be set to ZERO.

Bits b₆ and b₅ shall specify the disc Type

- if set to 00, they specify a single recording layer per side
- if set to 01, they specify two recording layers per side

Bit b_4 shall specify the track path
if set to ZERO, it specifies PTP on DL discs or a SL disc,
if set to ONE, it specifies OTP on DL discs

Bits b_3 to b_0 specify the layer type

Bit b_3 shall be set to ZERO

Bit b_2 if set to
ZERO, shall specify that the disc does not contain re-writable Data Zones
ONE, shall specify that the disc contains re-writable Data Zones

Bit b_1 if set to
ZERO, shall specify that the disc does not contain recordable Data Zones
ONE, shall specify that the disc contains recordable Data Zones

Bit b_0 if set to
ZERO, shall specify that the disc does not contain embossed Data Zones
ONE, shall specify that the disc contains embossed Data Zones

Byte 3 - Recording density

Bits b_7 to b_4 shall specify the average Channel bit length

if set to 0000, they specify 0,133 μm
if set to 0001, they specify 0,147 μm
if set to 0010, they indicate that this average length is in the range 0,205 μm to 0,218 μm
if set to 1000, they specify 0,176 37 μm

Bits b_3 to b_0 shall specify the average track pitch

if set to 0000, they indicate a track pitch of 0,74 μm
if set to 0001, they indicate a track pitch of 0,80 μm

This page is intentionally left blank

List of Changes

Differences between System Description DVD+R 4,7Gbytes:

Basic Format Specifications, version 1.31, September 2007
and Basic Format Specifications, version 1.3, July, 2004

Main changes:

- this System Description does not include any major changes,
- the following list shows minor changes that may be relevant for the system,
- trivial corrections and minor editorial changes are not mentioned.

page	clause	version 1.31	version 1.3	remarks
6	8.4	<i>Clause added to main body of document.</i>	---	clarification
9	9.8	<i>Reference servos raised one chapter level</i>	---	clarification
16	11.4.1 & 11.4.2	<i>Tracking requirements to be measured on blank discs</i>	---	clarification
17	11.5.1 & 11.5.2	<i>Tracking requirements to be measured on blank discs</i>	---	clarification
36	14.4.2.1	Byte 0 – bits b3 to b0: <i>version number 0000 may be used for test discs</i>	Byte 0 – bits b3 to b0: ---	extension
36	14.4.2.1	Byte 16 – bit b5: <i>reserved for use in Control Data Zone</i> bit b4 to b0: 0 0000	Byte 16 – bit b5 to b0: 00 0000	extension
41	14.4.2.3	<i>Possibility for Continuation blocks added.</i> <i>Bit b7 used for this purpose</i>	---	extension
42	14.4.2.3.1	Byte 64: ... Continuation bit / Format number	Byte 64: ... Format number	extension
47 / 48	14.4.2.3.2	Byte 96: ... Continuation bit / Format number	Byte 96: ... Format number	extension
52 / 53	14.4.2.3.3	Byte 128: ... Continuation bit / Format number	Byte 128: ... Format number	extension
61	17.6.2	<i>Use of Recorded Area Indicators is made optional</i>	---	simplification
62	Fig 25	Buffer Zone 2 512 Physical Sectors ---	Buffer Zone 2 512 Physical Sectors with Main Data set to (00)	may be used for VCPS

page	clause	version 1.31	version 1.3	remarks
64	18.8.1	Byte 16: <i>bit b5 used for indication of VCPS</i>	Byte 16: <i>bits b5 was 0</i>	extension
65	18.9	<i>VCPS information only to be recorded when requested by host/application</i> Whenever Buffer Zone 2 has been recorded, also the first ECC Block of the Data Zoen shall be recorded	--- ---	clarification
70	23.1	... Once the first ECC Block of the Data Zone is recorded, also Buffer Zone B of the Intro (or Buffer Zone 2 of the Lead-in Zone in case of the first Session) shall be recorded.	... Buffer Zone B of the Intro (or Buffer Zone 2 of the Lead-in Zone in case of the first Session on a blank disc) shall be recorded at the same time the first ECC Block of the Data Zone is recorded.	clarification
76	25.2	Physical Sectors 4 to 15 / bytes D0 to D2047: Repetitions of Sectors 0 to 3 or all Reserved	Physical Sectors 4 to 15 / bytes D0 to D2047: 3 Repetitions of Sectors 0 to 3 or all Reserved	also less than 3 repetitions are allowed
118	G.3	(V =32 or 40 depending on the applied write strategy; see 14.4.2.3.2 and 14.4.2.3.3)	(V is depending on the max recording velocity of te disc)	clarification
147	Annex N	<i>improved text</i>	---	clarification
154	Annex Q	Byte 0: <i>update of all DVD systems</i>	---	clarification

Amendments for DVD+R/+RW System Descriptions

Applicable to

- DVD+R:
DVD+R 4.7 Gbytes, part 1: Single Layer, volume 1: 1X to 16X Basic Format Specifications version 1.31, September 2007
 - DVD+RW:
DVD+RW 4.7 Gbytes, part 1: Single Layer, volume 1: 2,4X & 4X Basic Format Specifications version 1.31, September 2007
 - DVD+RW HS:
DVD+RW 4.7 Gbytes, part 1: Single Layer, volume 2: 8X Basic Format Specifications version 1.01, September 2007
 - DVD+R DL:
DVD+R 8.5 Gbytes, part 2: Dual Layer, volume 1: 2,4X to 16X Basic Format Specifications version 1.21, September 2007
 - DVD+RW DL:
DVD+RW 8.5 Gbytes, part 2: Dual Layer, volume 1: 2,4X Basic Format Specifications version 1.01, September 2007
-

DVD+RW, DVD+RW HS, DVD+RW DL, DVD+R and DVD+R DL:

3 References

Added text:

AACS: Advanced Access Content System (AACS), Blu-ray Disc Recordable Book, AACS LA LLC.
AVCREC: System Description AVCREC Rewritable Format, Blu-ray Disc Association.

DVD+RW, DVD+RW HS, DVD+RW DL, DVD+R and DVD+R DL:

4 Definitions

Added text:

AACS

AACS defines a method to prevent unauthorized copying and/or redistribution of video data that is recorded in the AVCREC Video Format.

DVD+RW, DVD+RW HS, DVD+RW DL, DVD+R and DVD+R DL:

14.4.2.1 General information – Bytes 0 to 31

Byte 16 – General Flag bits

Text to be replaced:

Bits b_4 to b_0 are reserved and shall be set to 0 0000

New text:

Bit b_4 is reserved for use in the Control Data Zone and shall be set to ZERO
Bits b_3 to b_0 are reserved and shall be set to 0000

DVD+RW and DVD+RW HS: **17.11.1 Physical Format information**
DVD+RW DL: **17.10.1 Physical Format information**
DVD+R and DVD+R DL: **18.8.1 Physical Format information**

Byte 16 – General Flag bits

Text to be replaced:

Bits b_4 to b_0 same as 14.4.2

New text:

Bit b_4 shall specify if Buffer Zone 2 in the Lead-in Zone contains AACCS related information, it shall be set to 0, indicating no AACCS related information is present in Buffer Zone 2, it shall be set to 1, indicating Buffer Zone 2 contains AACCS related information as defined in the AACCS System Description (see clause 3)

Bits b_3 to b_0 same as 14.4.2

DVD+R and DVD+R DL: **18.8.1 Physical Format information**

Byte 16 – General Flag bits

Text to be replaced:

Note: When closing the first Session, drives not designed to handle VCPS might set bit $b_5 = 0$ even when Buffer Zone 2 contains VCPS related information (recorded before by some other drive).

New text:

Note: When closing the first Session, drives not designed to handle VCPS or AACCS might set bit b_5 and/or bit $b_4 = 0$ even when Buffer Zone 2 contains VCPS or AACCS related information (recorded before by some other drive).

DVD+RW and DVD+RW HS: **17.12 Buffer Zone 2**
DVD+RW DL: **17.11 Buffer Zone 2**

Text to be replaced:

This recorded Zone shall consist of 512 Physical Sectors from 32 ECC Blocks. During use of the disc VCPS related information may be recorded to these 32 ECC Blocks, according to the specifications given in the VCPS System Description (see clause 3). If no VCPS related information is copied to these locations then the Main Data of the Data Frames in this Zone shall be set to all (00).

New text:

This recorded Zone shall consist of 512 Physical Sectors from 32 ECC Blocks. During use of the disc VCPS or AACCS related information may be recorded to these 32 ECC Blocks, according to the specifications given in the VCPS System Description respectively the AACCS System Description (see clause 3). Such VCPS or AACCS related information shall only be recorded when requested by the host/application. If no VCPS or AACCS related information is copied to these locations then the Main Data of the Data Frames in this Zone shall be set to all (00).

DVD+R and DVD+R DL: **18.9 Buffer Zone 2**

Text to be replaced:

This recorded Zone shall consist of 512 Physical Sectors from 32 ECC Blocks. During use of the disc VCPS related information may be recorded to these 32 ECC Blocks, according to the specifications given in the VCPS System Description (see clause 3). Such VCPS related information shall only be recorded when requested by the host/application. If no VCPS related information is copied to these locations then the Main Data of the Data Frames in this Zone shall be set to all (00).

New text:

This recorded Zone shall consist of 512 Physical Sectors from 32 ECC Blocks. During use of the disc VCPS or AACs related information may be recorded to these 32 ECC Blocks, according to the specifications given in the VCPS System Description respectively the AACs System Description (see clause 3). Such VCPS or AACs related information shall only be recorded when requested by the host/application. If no VCPS or AACs related information is copied to these locations then the Main Data of the Data Frames in this Zone shall be set to all (00).

DVD+RW:	Annex M, Figure M.1
DVD+RW HS, DVD+RW DL:	Annex N, Figure N.1
DVD+R and DVD+R DL:	Annex P, Figure P.1

Flowchart showing the use of Physical format information in ADIP

Text to be replaced:

- byte 16: (N)BCA descriptor

New text:

- byte 16: General Flag bits